

NANO-CERAMIC®



WWW.NANO-CERAMIC.COM INDUSTRIAL PROTECTIVE COATINGS



Transport

What is NANO-CERAMIC Thin Film Coating?

NANO-CERAMIC Thin Film Coating is a revolutionary, ultra-durable, ceramic clear-coating that provides superior scratchresistance and semi-permanent protection for all vehicle finishes, paints and exterior surfaces. (PFAS Free)



Jetpack
VideoPress

What makes NANO-CERAMIC Thin Film Coating so different?

NANO-CERAMIC Thin Film Coating is more than 4 times stronger than factory paint finishes and can absorb damage that would otherwise affect the appearance and integrity of your paint. This extremely durable ceramic coating reduces swirl marks and light scratches while protecting and preserving factory paint.



Conventional paints like acrylic urethane are simply not strong enough.


NANO-CERAMIC Thin Film Coating is completely resistant to acidic environmental substances like bird droppings, bug residue, acid rain, and tree sap, unlike your vehicle's factory paint, which can be permanently etched and damaged by these substances.

NANO-CERAMIC Thin Film Coating provides advanced protective barriers to your vehicle's surfaces, maintaining both high-gloss and matte finishes.


What are the benefits of applying NANO-CERAMIC Thin Film Coating?

NANO-CERAMIC Thin Film Coating provides vehicles with a superior, near-permanent, clear coating that is resistant to chemical etching, harder than factory paint finishes, and able to greatly reduce swirl marks and fine scratches while leaving a superior, hydrophobic surface that is easier to clean and stays cleaner longer.


Clearcoat, Glass vehicle materials can be treated with one of our NANO-CERAMIC Thin Film CERAMIC Restore the color and shine to plastic trim with advanced hydrophobic and UV protection. Even chrome, aluminum, and other metals can have added protection, as our coatings can withstand temperatures of over 1500°F



Step 1 The surface layer of factory clear coat is damaged and contaminated.



Step 2 Decontamination and polishing the clear coat to produce a smooth and even surface.



Step 3 Restoration of coating thickness with a super-durable layer of NANO-CERAMIC Thin Film





SIO3 GLOSS

Body & Windshield Protection for clearcoat / glass / chrome



Product ID : SIO31A00-32oz 8 Micron SIO21A00-32oz 2 Micron
Consumption : +/- 0.007oz/ft²
Reachable area : +/- 5.000ft² Body + 5.000ft² Windshield
Used for : Clearcoat, windshield, acrylic, glass, chrome
Application field : Transport

Your Fleet will stand out! These Kit-Sets contain all to make trucks and busses protected with a High-Tech ceramic layer.

- Two simple steps: Clean with our Steril Cleaner and Apply
- The original surface is protected against corrosion.
- Makes the surface anti scratch, much easier and quicker to clean, and the adhesion of dirt is reduced drastically.
- Promotes more hygienic surfaces.

This coating has an outstanding hydrophobic effect, and the surface stays cleaner longer. Cleaning intervals as well as the formation of water spots will be greatly reduced.

Expected Life Duration up to 5 Years+ (2 Years on Glass)

How to use: Page 12



Easy to apply



Cut cleaning costs



Anti-water spot
Anti-corrosion



Super
hydrophobic



Self-cleaning
stays cleaner longer



Anti-scratch



Visibility
safety



Protects your
investment

Applicator:



SIO5 MATTE

Body & Windshield Protection for clearcoat / glass / chrome



Product ID : SIO51A00-32oz 2.5 Micron SIO21A00-32oz 2 Micron
Consumption : +/- 0.007oz/ft²
Reachable area : +/- 5.000ft² Body + 5.000ft² Windshield
Used for : Clearcoat, windshield, acrylic, glass, chrome
Application field : Transport

Your Fleet will stand out! These Kit-Sets contain all to make trucks and busses protected with a High-Tech ceramic layer.

- Two simple steps: Clean with our Steril Cleaner and Apply
- The original surface is protected against corrosion.
- Makes the surface anti scratch, much easier and quicker to clean, and the adhesion of dirt is reduced drastically.
- Promotes more hygienic surfaces.

This coating has an outstanding hydrophobic effect, and the surface stays cleaner longer. Cleaning intervals as well as the formation of water spots will be greatly reduced.

Expected Life Duration up to 5 Years+ (2 Years on Glass)

How to use: Page 12



Easy to apply



Cut cleaning costs



Anti-water spot
Anti-corrosion



Super
hydrophobic



Self-cleaning
stays cleaner longer



Anti-scratch



Visibility
safety



Protects your
investment

Applicator:





CLEAN

Steril Cleaner

hard surface pretreatment



Product ID : CLEAN0500 16oz / CLEAN5000 1.32gal
CLEAN020L 5gal

Consumption : +/- 0.01oz/ft²

Used for : Glass, ceramics, mirrors, marble wood steel

Application field : Automotive

100% Steril with nano interlock technology (active lifting encapsulate the grease from the surface)

- Surface cleaning and residue removal.
- Cleaning gloves, notebooks, phones or any other item entering the cleanroom.
- Wipe down for pass-through to controlled environments.
- Pretreatment for the application of thin film coating



Applicator:



100% Steril



SIRP

Repellent Protector

windshield / mirrors



Product ID : SIRP0500 16oz
SIRP5000 1.32gal / SIRP020L 5gal

Consumption : +/- 0.007oz/ft²

Used for : Glass, acrylic, chrome, vinyl

Application field : Automotive

SIRP is an ultra long-lasting invisible surface coating which forms semi-permanent molecular bonds with the surface. The main function of treating hard surfaces with SIRP is to seal tiny pores, making it a smoother surface that will repel water and contaminants. This product is indispensable for bathrooms

- Two simple steps: Clean with our Steril Cleaner and Apply
- Makes the surface much easier and quicker to clean, and the adhesion of dirt is reduced drastically.
- Promotes more hygienic surfaces
- This coating has an outstanding hydrophobic effect, and the surface stays cleaner longer. Cleaning intervals as well as the formation of water spots will be greatly reduced.

Expected Life Duration up to 12 washes

How to use: Page 15



Applicator:





APPLY
MOVIE SCAN
OR CODE



SHRE

Pure Shine Shampoo all exterior surfaces

Product ID : SHRE1000 32oz
SHRE5000 1.32gal / SHRE020L 5gal

Consumption : 0.7oz : 2.5gal Water

Used for : Daily cleaning

Application field : Automotive



Reactivating Pure Shine Shampoo is an advanced technology, multi-purpose foaming cleaner containing a rinsing aid that will leave hard surfaces nearly dry after rinsing with clean water.

To assure the "easy-to-clean" effect that our nano layers provide, surfaces should be free of dyes, waxes or polymer sealants.

This multi-purpose cleaner contains no polymers or colors and will not leave a film of chemicals behind on the surface.

100% Safe to use for cleaning all non-porous surfaces and meets food grade classification for kitchens.

Contains no colouring chemicals which can discolor surfaces.

Dilution ratio 1: 500 (super economical)



Easy to apply



Easy to clean



Stays cleaner longer



Food grade

Applicator:



APPLY
MOVIE SCAN
OR CODE



MPCL

Multi Purpose Cleaner all interior surfaces

Product ID : MPCL0500 16oz
MPCL5000 1.32 / MPCL020L 5gal

Consumption : 0.017oz/ft²

Used for : Cleaning all interior surfaces

Application field : Automotive



The All-Purpose Cleaner is a fast, all-surface interior cleaner, low foaming, odor free, and especially suitable for removing stubborn stains from carpets, fabrics, vinyl, plastics and leather safely.

- It is very easy to clean dirt.
- Ready-to-use mixture with the right chemical strength and safe to use
- Of course it is safe for the surface of fabrics, carpets, plastics, leather, rubber and does not fade paint.
- Quickly remove dirt, dust and food scraps

Safe to use does not harm the surface



**Easy to apply
spray & wipe**



No discoloration



**Indoor
Outdoor**



Quick to use



**Spills are easy
to remove**



Cleaner for longer



STEP

One Step Polish

High gloss / zero swirl

Product ID : STEP0250 8.5oz
Consumption : 0.017oz/ft²
Used for : Clearcoat, gelcoat, glass and acrylic
Application field : Automotive




Only this High Quality Polish Compound together with the recommended pads assure that every yacht can be polished from deep scratches till high gloss/zero swirl in one single step.

This saves an enormous amount on working hours as polishing takes normally 65% of the total process to make a yacht a thin film nano layer.


Purple Wool Heavy Cutting Pad cuts like natural sheepskin but finishes like a polish pad. Aggressively removes P1500 grit scratches, leaving a lustrous finish with no hazing by reducing compounding swirls.

The Cutting Pad is constructed with a blue foam and white microfiber. The Micro Cutting Pad with orange foam and white microfiber, the Polishing Pad is constructed with a black foam and black microfiber.

The pad serie is available 5.5 inch and 3 inch.



Thin Film Protection Plan for Trucks and Buses

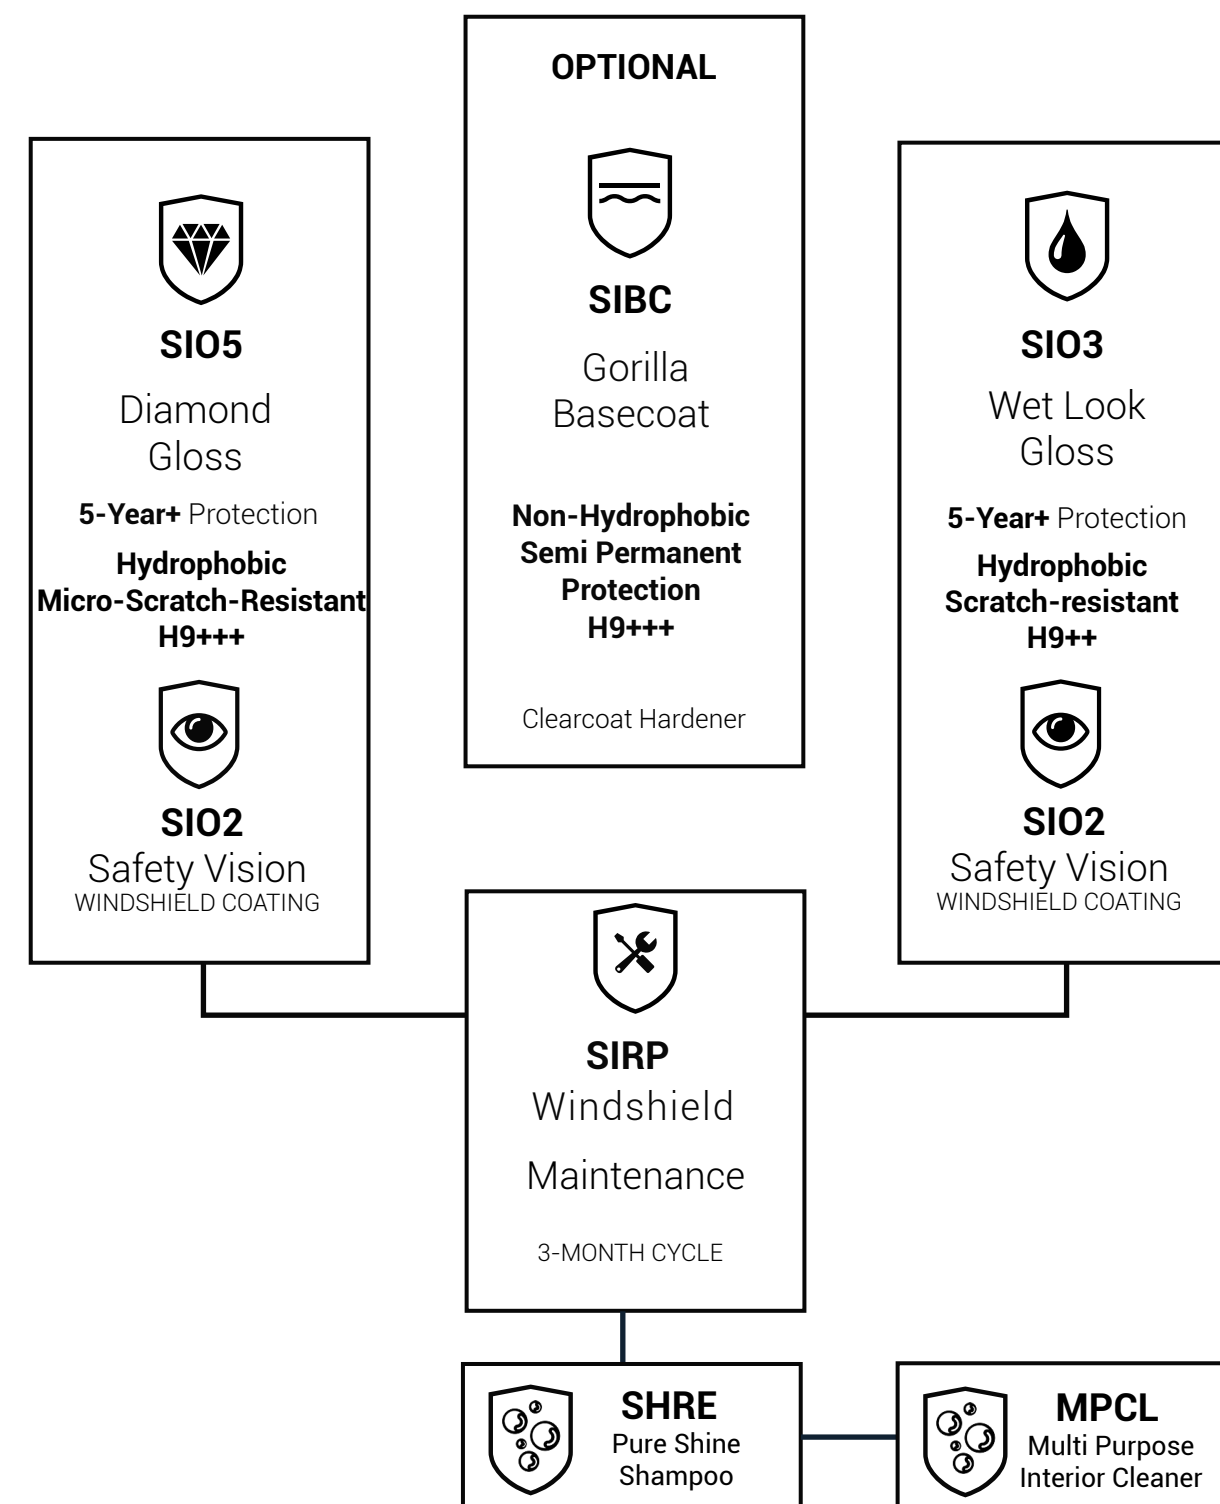

HOW TO USE:

NANO-CERAMIC SIRP-SIO3-SIO5 Thin film coatings

These products can be stored for up to 24 months (*in a dry, temperature-stable, dark environment*)

Ambient temperature:

41-86°F Avoid direct sunlight and/or high air humidity.

CLEANING

Clean the surface thoroughly with our Steril Cleaner until it is absolutely clean. If necessary, use our Scrub Cleaner or Reactivating Pure Shine Shampoo in advance. Make sure that all contamination is removed so that the glass coating can bind properly onto a clean surface. Make sure that the surface is completely dry before application!

APPLICATION OF SIRP

Spray a layer of nano SIRP on the surface and rub it in with a dry microtowel, keep rubbing it into the surface with strong pressure and wipe until all the product is even and scrubbed and only a little hazing / residue is visible **gently** wipe off this hazing / residue with a clean microfiber cloth after about a minute There is only a little pressure needed to remove the hazing completely. Curing time 1 hour.

APPLICATION OF SIO3-SIO5

Our coatings have best results on new on almost like new surfaces, we recommend to polish the surface if needed. Wear nitril gloves to clean the surface with our Steril Pretreatment Cleaner. (without wearing gloves, the oil from your hands may appear via the towel onto the surface) !!

Use more than one clean cloth to remove the dirt from the surface. (Please make sure you don't brush the dirt around on the surface by using dirty clothes.) Making the clearcoat-chrome-glass-surface clean is the most important issue. If the surface is not super steril than you will experience chemical reactions between our coatings and the still available contamination what is then visible into the ceramic layer when it is cured. In that case you will need to polish the surface again. So please don't hurry in carrying out this preparation work, but instead focus on this for 100%.

Learn the right application technique > Watch and Study the Apply Video scanning the QR Code on this page or on the packaging

(fragment **BASE COAT**) OPTIONAL

Use nitril gloves! Remove the plastic inner closure from the bottle and put in the dripper. Shake bottle before use! We recommend to apply the surface in easy to handle segments of about 15"x 15"inch, following the panels shape and corner lines and use these lines for overlaps. Put 8-10 drops BASE COAT on the suede mini towel using the applicator block underneath, devide the coating properly by going 3 times over the same surface, wait till it lights up (+/- 25sec) and remove the residue carefully, and buff it lightly use a separate micro towel for this. Wait 2 hours before you continue with the application of one of our hydrophobic Top Coatings. After 2 hours BASE COAT is 80% cured and ready to receive one of our TOP COATINGS. After about 7 days the BASE COATING has been fully cured and is almost unremovable.

(fragment TOP COAT **SIO3-SIO5**)

Use nitril gloves! Remove the plastic inner closure from the bottle and put in the dripper. Shake t

he bottle before use! We recommend to apply the surface in easy to handle segments following the panel shape and corner lines and use these lines for overlaps.

Put 6-8 drops 40x40cm (15"x 15"inch), (if start use more drops as the towel is otherwise too dry) TOP COATING on the suede mini towel using the applicator block underneath. Start dividing it from out of the middle of the surface and keep spreading it arround by light pressure in criss-cross motions until the product is evenly distributed.

MOST IMPORTANT keep on doing this till no product residue is visible anymore. If you use too much coating and/or spreading it out from example one start position in a corner of a panel then you will not be able to divide it properly towards the other side and it will roll-up on each other and form a not equal layer. To use too much coating and not divide it equally is the second most critical point !!



When you apply TOP COATING in this correct way, then there is no need to use a micro towel for polishing anymore.

(fragment **SIO2 SAFETY VISION**)

Apply the nano layer SAFETY VISION COATING with the cotton apply pad. Spread 10-15 drops 50x60cm (20"x 25"inch) of SAFETY VISION COATING on the cotton pad and apply rubb it in motions on the windshield with firm pressure until all of the product is evenly distributed and only very little residue is visible.

Remove the coating residue with a soft clean microfiber cloth after about a minute and buff the glass/panels gently to take the veils away. There is not much pressure necessary to remove it completely. Note: dry the dripper and close the bottles tightly if you want to save the content for future use. At normal ambient temperature the Nano layers are sufficiently cured after approximately 6 hours (or 2 hours Infrared) (avoid water contact during this time).

Application Video SGS (Test Reports)



What is NANO-CERAMIC Permanent Coating?

NANO-CERAMIC permanent coating is the latest generation of protective coating which transforms paint into a hard ceramic, providing superior scratch resistance and permanent protection for all exterior or interior surfaces. (PFAS-free)


NANO-CERAMIC permanent coating is 600°F resistant and more than 6 times stronger than traditional acrylic based paint finishes, and is effectively preventing damage that would otherwise affect the appearance and integrity of the original surface.

Zero Maintenance for 3 decades to come!

Our NANO-CERAMIC permanent coating is rigorously tested by an independent testing laboratory according to the European standard for outdoor paints (EN 1504-2) please find the test report on page 19.

Can NANO-CERAMIC Permanent Coating be applied on any surface?


The NANO-CERAMIC permanent coating can be applied directly or indirectly on all kinds of interior and /or exterior surfaces (absorbing and non-absorbing), such as concrete, steel, wood, acrylic, gypsum and many more.

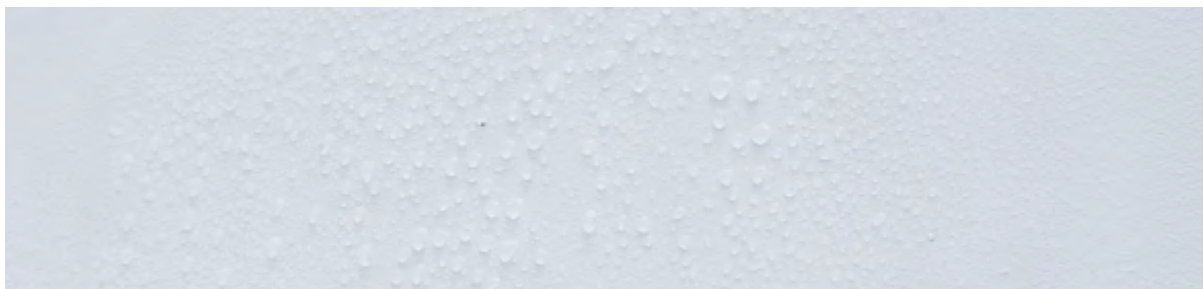

Is NANO-CERAMIC Permanent Coating self-cleaning?

NANO-CERAMIC permanent coating provides a permanent hydrophobic surface that is self cleaning, easier to clean and stays cleaner longer as water and dirt can not penetrate the ceramic layer. NANO-CERAMIC permanent coating is resistant to water vapor and water absorption.

Cross Section of Coating System

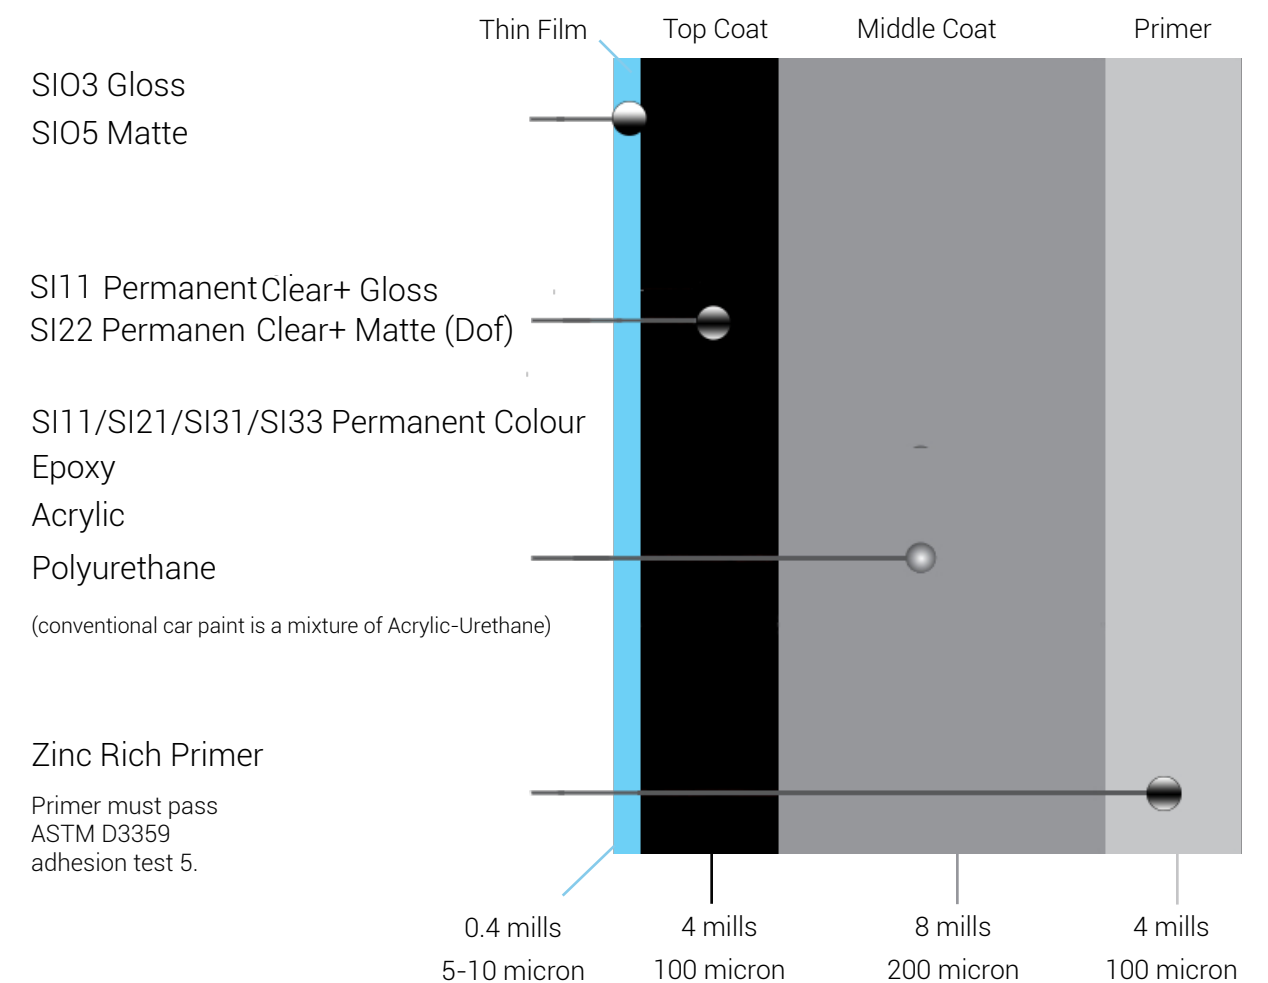

Conventional paints

Conventional gelcoats are a mixture with Epoxy or polyester resins, of which the quality of resin and pigments are the most important factor in the ultimate strength.

Most have a lifespan of 15 years, with hardness and color retention (sun fading) being the most common problems in keeping the desired object at an aesthetically pleasing level.

There is no better option than protecting your fleet with a NANO-CERAMIC Thin Film or Permanent Coating!

Do not wait till the surface get worse, most easy is to apply wipe or spray when the surfaces are still in new or in nearly new condition and the cost do not outweigh the benefits



SI11/12

2-Component (2K)

Topcoat Clear+

for glossy or matte surfaces

Product ID	: SI112000 67oz / 4.2 lbs SI122000 67oz / 4.5 lbs
Consumption	: 3 layers 0.06lbs/ft ² - 0.96oz/ ft ² = 3 mil/ 70ft ²
Reachable area	: 2 layers 0.04lbs/ft ² - 0.64oz/ ft ² = 2 mil/140ft ² : 1 layer 0.02lbs/ft ² - 0.32oz/ ft ² = 1 mil/210ft ²
Hardness	: H9
Used for	: Fiberglass, steel, aluminium, plastics, wood
Application field	: Transport

SI11/SI12 is an incredibly strong 2-component paint system which forms a durable matrix of molecular bonds (transformation to ceramic) resulting in permanent protection of the surface.

Three simple steps: Clean, Dry, and Apply.

- Easily repels water, dirt, dust, and pollutants.
- This coating is permanent hydrophobic.
- Restores damaged finishes and reduces cleaning intervals.
- Resistant to all kinds of chemicals and UV radiation.
- Superior anti-pollution and anti-corrosion properties.
- This coating can withstand temperatures of 300°C.

Expected Life Duration up to 30 years+



How to use: Page 20

- Easy to apply**
- Cut cleaning costs**
- Anti-water spot**
Anti-corrosion
- Permanent hydrophobic**
- Self-cleaning**
stays cleaner longer
- Anti-scratch**
- Save on fuel**
Save on repaints
- Protects your investment**



SI21/22

2-Component (2K)

Paint Strongest White

for glossy or matte surfaces

Product ID	: SI212000 67oz / 5.3 lbs SI222000 67oz / 5.5 lbs
Consumption	: 3 layers 0.044lbs/ft ² - 0.56oz/ ft ² = 3 mil/120ft ²
Reachable area	: 2 layers 0.030lbs/ft ² - 0.37oz/ ft ² = 2 mil/160ft ² : 1 layer 0.014lbs/ft ² - 0.19oz/ ft ² = 1 mil/240ft ²
Hardness	: H8
Used on	: Gelcoat, fiberglass, steel, aluminium, plastics, wood
Application field	: Transport

SI21/SI22 is an incredibly strong 2-component paint system which forms a durable matrix of molecular bonds (transformation to ceramic) resulting in permanent protection of the surface.

Three simple steps: Clean, Dry, and Apply.


- Easily repels water, dirt, dust, and pollutants.
- This coating does not absorb any water
- Resistant to all kinds of chemicals and UV radiation.
- This coating can withstand temperatures of 300°C

Expected Life Duration up to 25 year+



How to use: Page 20

- Easy to apply**
Repaintable
- Cut maintenance costs**
- Anti-water spot**
Anti-corrosion
- Permanent hydrophobic**
- Self-cleaning**
stays cleaner longer
- Anti-scratch**
- Visibility**
- Protects your investment**

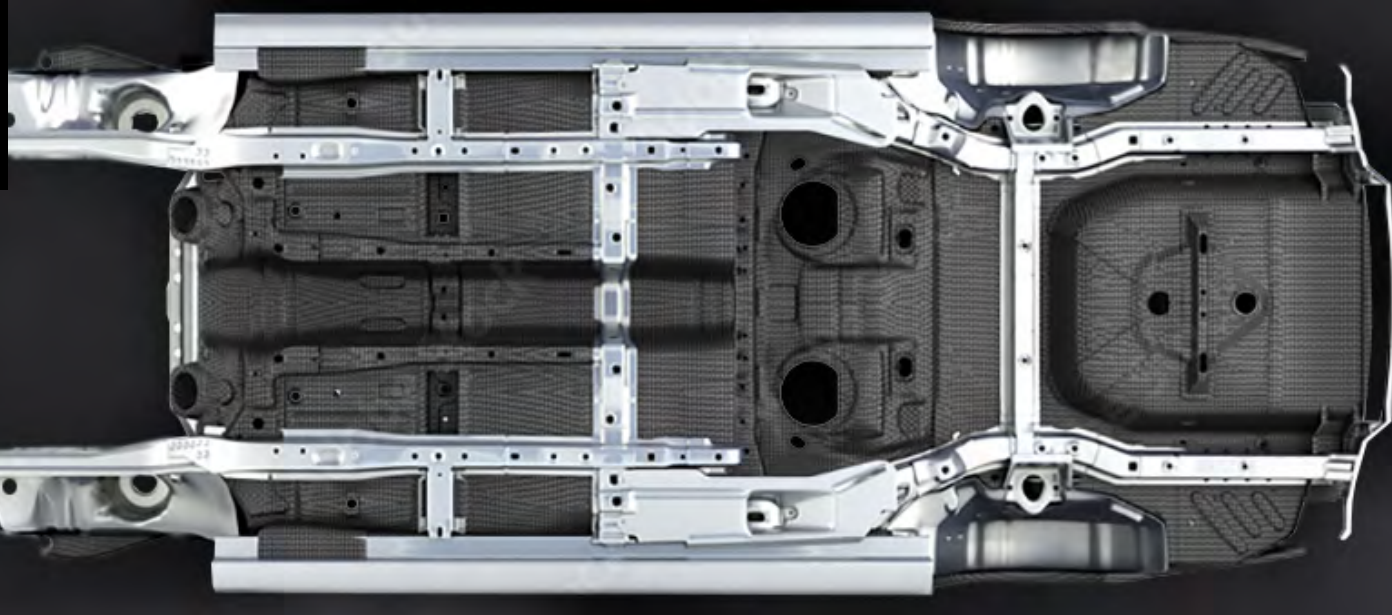

SI32

2-Component (2K)

Undercoat-Bedliner Textured Transparent for semi gloss surfaces

Product ID	: SI322000 67oz / 4.4 lbs
Consumption	: 3 layers 0.050lbs/ft ² - 0.76oz/ ft ² = 3 mil/ 90ft ²
Reachable area	: 2 layers 0.033lbs/ft ² - 0.51oz/ ft ² = 2 mil/180ft ² : 1 layer 0.017lbs/ft ² - 0.25oz/ ft ² = 1 mil/270ft ²
Hardness	: H9
Used for	: Fiberglass, steel, aluminum, plastics, an many more
Application field	: Transport

SI32 is an incredibly strong 2-component paint system which forms a durable matrix of molecular bonds (transformation to ceramic) resulting in permanent protection of the surface.

Three simple steps: Clean, Dry, and Apply.


- Easily repels water, dirt, dust, and pollutants.
- This coating is permanent hydrophobic.
- Restores damaged finishes and reduces cleaning intervals.
- Resistant to all kinds of chemicals and UV radiation.
- Superior anti-pollution and anti-corrosion properties.
- This coating can withstand temperatures of 300°C.

Expected Life Duration up to 30 years+



How to use: Page 20

-  **Impact Resistance**
2lbs/2.5ft
-  **Easy to apply**
-  **Cut cleaning costs**
-  **Anti-water spot**
Anti-corrosion
-  **Permanent hydrophobic**
-  **Self-cleaning**
stays cleaner longer
-  **Anti-scratch**
-  **Save on fuel**
Save on repaints
-  **Protects your investment**

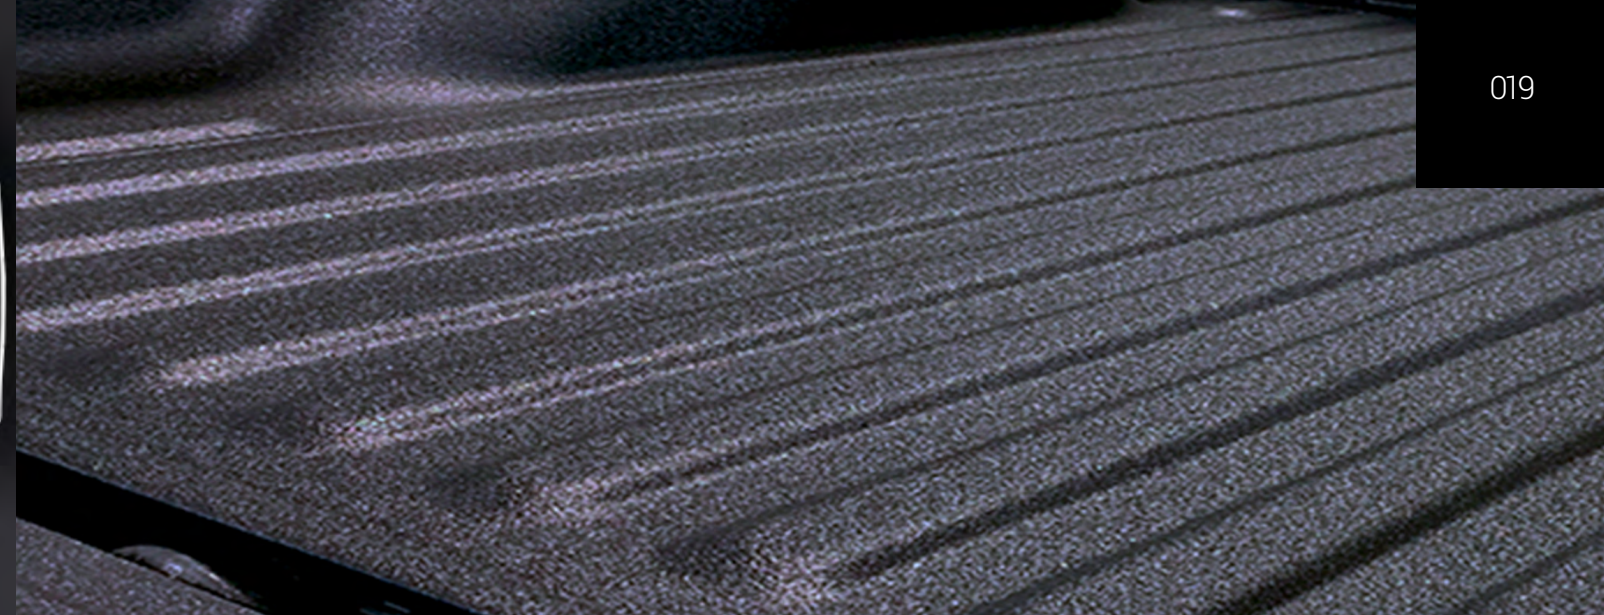

SI33

2-Component (2K)

Undercoat-Bedliner Textured Black for semi gloss surfaces

Product ID	: SI332000 67oz / 4.4 lbs (tinted on location)
Consumption	: 3 layers 0.050lbs/ft ² - 0.76oz/ ft ² = 3 mil/ 90ft ²
Reachable area	: 2 layers 0.033lbs/ft ² - 0.51oz/ ft ² = 2 mil/180ft ² : 1 layer 0.017lbs/ft ² - 0.25oz/ ft ² = 1 mil/270ft ²
Hardness	: H9
Used for	: Fiberglass, steel, aluminum, plastics, an many more
Application field	: Transport

SI33 is an incredibly strong 2-component paint system which forms a durable matrix of molecular bonds (transformation to ceramic) resulting in permanent protection of the surface.

Three simple steps: Clean, Dry, and Apply.

- Easily repels water, dirt, dust, and pollutants.
- This coating does not absorb any water
- Resistant to all kinds of chemicals and UV radiation.
- This coating can withstand temperatures of 300°C

Expected Life Duration up to 25 year+




How to use: Page 20

-  **Impact Resistance**
2lbs/2.5ft
-  **Easy to apply**
Repaintable
-  **Cut maintenance costs**
-  **Anti-water spot**
Anti-corrosion
-  **Permanent hydrophobic**
-  **Self-cleaning**
stays cleaner longer
-  **Anti-scratch**
-  **Visibility**
-  **Protects your investment**

Color mixing has never been so easy!!!

X- SMART is the modular version of the acclaimed dispenser series, extremely cost-effective and easy to operate, with a low maintenance

This color mixer has a robust and tubeless design, built with a patented pump technology (to reduce waste) and identical features, making it a highly advanced dispenser, ideally suited to reduced capacity.

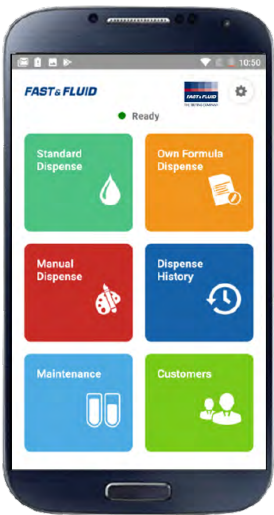

Prisma-RT is a cloud-based innovative mobile color application compatible with the X-SMART dispenser. It brings the best of wireless technology without the associated investment costs in hardware. Customers do not have to provide computers and other accessories or set up servers, eliminating the need for complicated and time-consuming installation and configuration. This smart Prisma-RT device helps to fix prices and taxes and can print labels via Wi-Fi.



X-SMART
Stabilizer plates

16 High Grade Coloring chemicals



Titanium White
Masstone
Tint
844-0061 1.05gal



Quinacridone Red
Masstone
Tint
844-0451 32oz



Scarlet Red
Masstone
Tint
844-0526 32oz



Lead Free Orange
Masstone
Tint
844-0982 32oz



Trans Red Oxide
Masstone
Tint
844-1054 32oz



Red Oxide
Masstone
Tint
844-1063 32oz



Burnt Umber
Masstone
Tint
844-1352 32oz



Trans Yellow Oxide
Masstone
Tint
844-1852 32oz



Yellow Oxide
Masstone
Tint
844-1863 32oz



Lead Free Med Yellow
Masstone
Tint
844-2555 32oz



Yellow
Masstone
Tint
844-2826 32oz



Organic Yellow
Masstone
Tint
844-2852 32oz



PHTHALO Green
Masstone
Tint
844-5558 32oz



Quinacridone Violet
Masstone
Tint
844-9451 32oz



Lamp Black
Masstone
Tint
844-9955 32oz



PHTHALO BLUE
Masstone
Tint
844-7262 32oz

Color card

Residential

SI13 White Egg-Shell (Flat Finish) 15/25 (20/60°)

SI15 White Egg Shell (Flat Finish) 18/28 (20/60°)

SI21 White Gloss 49/77 (20/60°)

SI22 White Satin 33/59 (20/60°)

SI41 Textured White Semi Gloss 41/69 (20/60°)

SI42 Textured White Matte 11/21 (20/60°)

Original

Cool white

RAL 9001

Cream white

RAL 9002

Grey white

RAL 9003

Signal white

RAL 9004

Signal black

RAL 9005

Jet black

RAL 9006

White aluminium

RAL 9007

Grey aluminium

RAL 9010

Pure white

RAL 9011

Graphite black

RAL 9016

Traffic white

RAL 9018

Papyrus white

RAL 9022

Pearl light grey

RAL 9023

Pearl dark grey

RAL 1000

Green beige

RAL 1001

Beige

RAL 1002

Sand yellow

RAL 1011

Brownbeige

RAL 1013

Pearl white

RAL 1014

Ivory

RAL 1015

Light Ivory

RAL 9017

Traffic black

RAL 3015

Light pink

RAL 5007

Pastel blue

RAL 4009

Pastell violet

RAL 6027

Light green

RAL 7030

Squirrel grey

RAL 1036

Pearl gold

RAL 8029

Pearl copper

RAL 8012

Pearl blackberry

RAL 9025

Pearl gentian blue

RAL 6036

Pearl opal green

RAL 8016

Mahogany braun

Wood

SI11 Transparent Gloss 51/78 (20/60°)

SI12 Transparent Matte 11/21 (20/60°)

SI11 Transparent

SI11 Light

SI11 Nut

SI11 Colonial

Industrial

SI11 Transparent Gloss 51/78 (20/60°)

SI21 White Gloss 49/77 (20/60°)

SI22 White Satin 33/59 (20/60°)

Transparent

Lumious yellow

RAL 3020

Traffic red

RAL 9005

Jet black

RAL 1004

Golden yellow [Cat]

RAL 6002

Leaf green [J.D Deere]

RAL 7035

Light grey

RAL 7011

Dark grey

RAL 7001

Silver grey

RAL 8032

Signal brown

RAL 8025

Pale brown

Marine

SI12 Transparent Matte 11/21 (20/60°)

SI41 Textured White Semi Gloss 41/69 (20/60°)

SI42 Textured White Matte 11/21 (20/60°)

Original

Cool white

RAL 9010

Pure white

RAL 9001

Cream white

RAL 9023

Distant blue

RAL 1023

Traffic yellow

RAL 7001

Silver gray

RAL 1015

Light Ivory

RAL 9016

Pure white

RAL 9001

Cream

RAL 1001

Beige

RAL 1020

Olive yellow

SI31 Textured Transparent Semi Gloss 41/69 (20/60°)

SI33 Textured Black Semi Gloss 41/69 (20/60°)

RAL 3000

Fire red

RAL 3004

Burgundy

RAL 7036

Platinum

RAL 9005

Jet Black

RAL 9019

Turquoise bleu

RAL 6027

Light green

RAL 9000

Violet blue

RAL 9012

Light blue

RAL 9002

Ultramarine blue

RAL 9013

Sapphire blue

RAL 5005

Signal blue

Transparent matte

RAL 7031

Blue grey

RAL 9005

Jet black

RAL 5006

NATO green

RAL 7024

Graphite grey

RAL 1015

Desert sand

Camo beige

Dark grey camo

Dark brown camo

Olive drap

Very dark drap

RAL 6031

Bronze green

RAL 6451

Brunswick green

RAL 7016

Dark sea grey

RAL 5008

[RAF] Blue grey

Antifouling

SI14 Color 31/41 (20/60°)

Transparent

RAL 9005

Jet Black

RAL 3001

Signal Red

RAL 5002

Ultra marine blue

RAL 7004

Signal Grey



SIX1

2-Component (2K)

Primer Epoxy Polyamide

heavy duty - anti-corrosion

Article Nr.	: SIX11250 42oz / 3.2 lbs SIX15000 1.32gal / 12.8 lbs
Consumption	: 2 layers +/- 0.53 lbs/ft ² - 0.7oz/ft ² 80 micron = 50ft ²
Reachable area	: 1 layer +/- 0.26 lbs/ft ² - 0.4oz/ft ² 40 micron = 100ft ²
Hardness	: H5
Colors	: White, Grey or RAL (RAL Minimum Order 250pcs 1.32gal)
Used on	: Concrete, Steel, Aluminium, Fiberglass and other organic surfaces
Application area	: Buildings, marine, airports, offshore structures, bridges

SIX1 is a solvent based epoxy polyamide primer. This primer is used for corrosion protection on concrete, stainless, galvanized, carbon and alloy steel, aluminum in corrosive conditions and has excellent adhesion to all organic substrates and to all of our ceramic topcoats. The primer can be applied at a relative humidity of 40-80% and can be painted over within 8 hours 85°F, 1 hours 140°F.



Fast Repaintable



Excellent adhesion



Heavy Duty Primer - Smooth Surfacer

SIX2

2-Component (2K)

Primer Surfacer Acrylic Alkyd

smooth - surface modifier

Article Nr.	: SIX21250 42oz / 3.2 lbs SIX25000 1.32gal / 12.8 lbs
Consumption	: 2 layers +/- 0.44 lbs/ft ² - 0.7oz/ft ² 60 micron = 60ft ²
Reachable area	: 1 layer +/- 0.22 lbs/ft ² - 0.4oz/ft ² 30 micron = 120ft ²
Hardness	: H3
Colors	: White or Grey
Used on	: Steel, aluminium, wood, fiberglass, and old paint systems.
Application area	: Buildings, marine, airports, bridges

SIX2 High-quality 2K surfacer (two-component basecoat) for auto-refinish, marine, and industrial coating applications where a smooth surface is required. The primer has excellent adhesion to all organic substrates and to all of our ceramic topcoats. The primer can be applied at a relative humidity of 30-80% and can be painted over within 4 hours 85°F, 1 hours 140°F.



Fast Repaintable



Excellent adhesion



VOC Free



SIX3

2-Component (2K)

Primer PU Wood Filler

surface modifier - absorbtion reducer

- Article Nr: : SIX31500 51oz / 3.3 lbs
- Consumption : 2 layers +/- 0.40 lbs/ft² - 0.6oz/ft² 60 micron = 80ft²
- Reachable area : 1 layer +/- 0.20 lbs/ft² - 0.3oz/ft² 30 micron = 120ft²
- Hardness : H4
- Used on : Steel, Aluminium and other organic surfaces
- Application area : Buildings, marine, airports, offshore structures, bridges

SIX3 is a solvent borne transparent wood filler. This primer is used as surface modification for, wood or natural stone to reduce capillary absorption and has an excellent adhesion to all organic substrates and towards one of our ceramic top coats. The primer can be applied at a relative humidity of 40-80%.



- Fast Repaintable
- Excellent adhesion



Wood or Natural Stone - Filler

SIX4

1-Component (1K)

Primer Acrylic Waterbased

all surfaces modifier - stain killer

- Article Nr: : SIX41000 32oz / 2.65 lbs SIX44000 1gal / 10.6 lbs
- onsumption : 2 layers +/- 0.53 lbs/ft² - 0.7oz/ft² 80 micron = 50ft²
- Reachable area : 1 layer +/- 0.26 lbs/ft² - 0.4oz/ft² 40 micron = 100ft²
- Hardness : H3
- Colors : White, Grey or RAL (RAL Minimum Order 250pcs 1gal)
- Used on : Concrete, wood, drywalls and old waterbased paints
- Application area : Buildings, walls and ceilings indoor or outdoor

SIX4 Acrylic Water-Based Primer is a premium, all-purpose primer-sealer with excellent adhesion, stain-blocking, and hiding power. Ideal for both interior and exterior surfaces, it bonds to glossy surfaces without sanding, effectively blocks stains, and provides a smooth foundation for any solvent-based or water-based topcoat



- Fast Repaintable
- Excellent adhesion
- VOC Free




SIX5

2-Component (2K)

Putty Polyester

ultra smooth - sandable



Article Nr: : SIX51000 2.2 lbs
Color : Grey
Used on : Metal, wood, fiberglass, concrete, plastics
Application area : Buildings, marine, airports, offshore structures, bridges



Fast Repaintable



Excellent adhesion

SIX5 is a High quality 2 (two) component Epoxy base putty for auto-refinish, marine and industrial coating applications.




Substrate Kit, Test, Touch and Feel

Substrate Kit
 16 different coating and paints





DEMOSKIT
 All our products are produced according
 to EU/ECHA USA/OSHA/EPA CANADA/WHIMS
 regulations

Scan QR Code for TDS and SDS

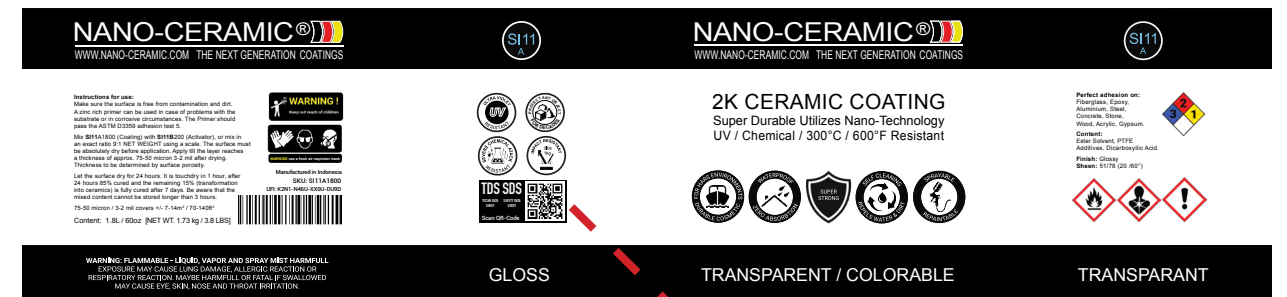

Video Application & (Test) Results

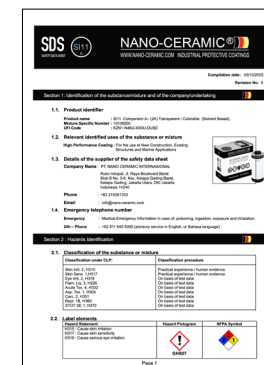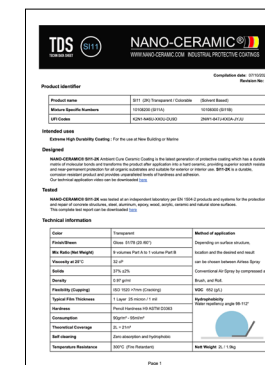

SOLV

Thinner solvent

for all types of our ceramic paint & coating

Article Nr. : SOLV0400 14oz / 0.8 lbs SOLV2000 64oz / 3.9 lbs SOLV5000 1.32gal / 9.7 lbs

All our paints and coatings are ready to use, for certain spray applications, especially dark colors who require more than average color pigments, it may be necessary to use a little thinner solvent to achieve optimum flowability.



RETA/ACCL

Retarder
Accelerator

slow down flash time or speed up curing

Article Nr. : RETA0400 14oz / 0.85 lbs ACCL0200 7oz / 0.4 lbs

If your application need longer flash time (longer time to build up the layer with a second or third coat you can add the RETA Retarder.

In case you want to speed up the curing process you can add the high efficient ACCL Accelerator.



How to use our Permanent Coating System:

These products can be stored for up to 24 months (*in a dry, temperature-stable dark environment*)

Processing Temperature:

Ambient temperature: 41-86°F
Avoid direct sunlight, Rain and /or high humidity.

IMPORTANT:

Before you use a NANO-CERAMIC product, please make sure you wear suitable protection gear. We always recommend using a paint suit, respirator mask and latex or nitrile gloves.

Outfit/Applicators:



Fresh Air Respirator



Paint Suit



Nitrile gloves



Professional Paint Sprayer
1.3-1.7mm / 0.05-0.06" nozzle

Application information

The SI11/SI12/SI21/SI22/SI31/SI33 coatings can be applied directly or indirectly on all surfaces (porous and non-porous) such as concrete, steel, wood, acrylic, gypsum, painted or unpainted surfaces, indoors, or outdoors. The surface underneath will be superbly protected against erosion and corrosion and will stay cleaner longer. Cleaning becomes quicker, easier, and less expensive, as special cleaning agents are unnecessary.

Preparation

Make sure the surface is free from any contamination and dirt. A zinc rich primer can be used in case of problems with the substrate. **Warning the surface must be completely dry before application and must stay dry for 6 hours after application after application!**

The 2-Component Permanent Coating System

Mix the can SI11B-SI12B-SI21B-SI22B-SI31B-SI33B with the can of SI11A-SI12A-SI21A-SI22A-SI31A-SI33A by pouring can B into can A, or measure exactly by net weight in a ratio of 7:3 and mix very well, or measure exactly by net weight in a ratio of 9:1 and mix thoroughly with a power agitator.

Carefully pour the mixed contents into a professional paint sprayer, and spray in thin layers until the surface reaches your desired thickness. Let the surface dry for 24 hours. It is touch-dry in 1 hours, after 4 hours, 85% cured, and the remaining 15% (transformation into ceramics) is fully cured after 7 days.

Be aware that the mixed contents cannot be stored longer than 3 hours.

The surface can simply be maintained with a high pressure washer at 80 bar using our biologically degradable Reactivating Shampoo SHRE.

Tool cleaning

The individual components, as well as the mixing system of the paint sprayer, can be diluted and cleaned using our THIN Thinner Solvent.

NANO-CERAMIC®



WWW.NANO-CERAMIC.COM INDUSTRIAL PROTECTIVE COATINGS



The Leader in Durability

Did you know?

*That our coatings are made
of pure silica sand, which is
the most common element
on Earth?*

Dealer