

# NANO-CERAMIC®

WWW.NANO-CERAMIC.COM THE NEXT GENERATION COATINGS



**Marine** Permanent Coating Systems

## What is NANO-CERAMIC Permanent Coating?

NANO-CERAMIC permanent coating is the latest generation of protective coating which transforms paint into a hard ceramic, providing superior scratch resistance and permanent protection for all exterior or interior surfaces.

NANO-CERAMIC permanent coating is 600°F resistant and more than 6 times stronger than traditional acrylic based paint finishes, and is effectively preventing damage that would otherwise affect the appearance and integrity of the original surface.

### Low Maintenance for 3 decades to come!

Our NANO-CERAMIC permanent coating is (non PFAS) rigorously tested by an independent testing laboratory according to the European standard for outdoor paints (EN 1504-2) please find the test report on our website.

### Can NANO-CERAMIC Permanent Coating be applied on any surface?

The NANO-CERAMIC permanent coating can be applied directly or indirectly on all kinds of interior and /or exterior surfaces (absorbing and non-absorbing), such as concrete, steel, wood, acrylic, gypsum and many more.



### Is NANO-CERAMIC Permanent Coating self-cleaning?

NANO-CERAMIC permanent coating provides a permanent hydrophobic surface that is self cleaning, easier to clean and stays cleaner longer as water and dirt can not penetrate the ceramic layer. NANO-CERAMIC permanent coating is resistant to water vapor and water absorption.

## Can our hydrophobic coatings increase acceleration time and speed while simultaneously reducing fuel consumption?

Yes, the superhydrophobic surface has a good drag reduction effect, and the maximum drag reduction rate is up to 23.4%.


In a new analysis from IPTEK ITS 2023 concerning Drag Reduction, the following conclusions have been obtained. It was found that there was an increase in acceleration due to drag reduction on the ship model treated with a superhydrophobic coating, showing a 31% improvement compared to the non-coated surface and a 27% improvement compared to a conventionally anti-fouling coated surface.

As published in the International Journal of Marine Engineering Innovation and Research. Click [here](#) for the IPTEK analyses.

### Other paints are simply not suitable for longterm harsh outdoor environments.

In order to avoid poorly maintained properties (concrete rot, chipped and weathered paint, etc) for the next decades, our Permanent Coating System is simply the best solution to keep the value of your investment in place.

## Superior in Color & Gloss Retention

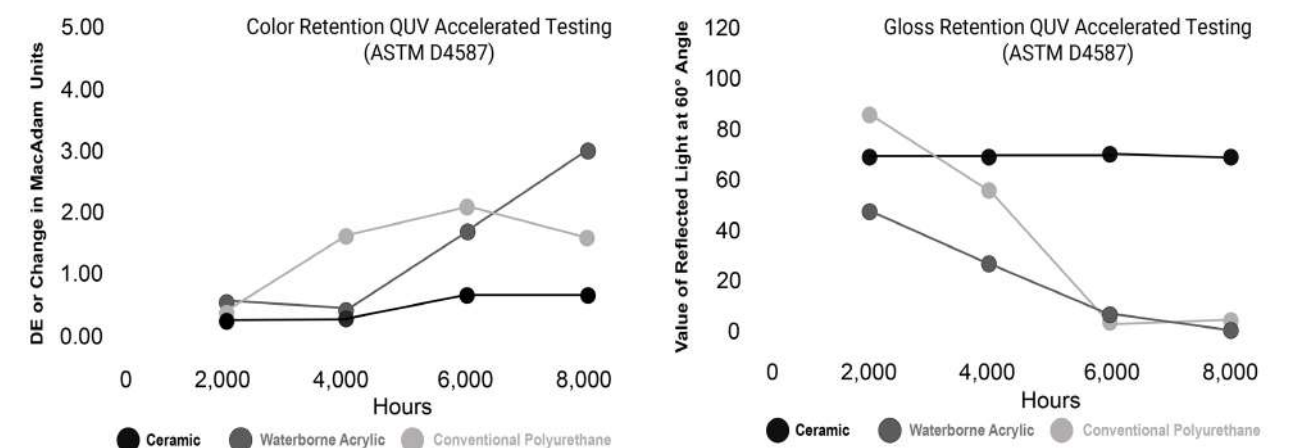



# A special selection of high grade tinting chemicals computerized dispersed in a superior ceramic resin.


Conventional gelcoats are a mixture with Epoxy or Polyurethane resins, of which the quality of resin and pigments are the most important factor in the ultimate strength. Most have a lifespan of 15 years, with hardness, color and gloss retention (sun fading) and manual mixing towards consistent quality being the most common problems in keeping the desired object at an aesthetically pleasing level.

## Quality Comparison of paints technologies

In case written in bold font it means existing shortcomings in quality.

Characteristics	Acrylic Latex walls ceilings	Acrylic walls floors	Epoxy floors	Polyurethane waterproofing	CERAMIC® all surfaces
Primer	Yes	Yes	Yes	Yes	No
Adhesion Strength	Poor	Poor	Poor	Poor	Excellent
Cross Cut Test	Poor	Poor	Good	Poor	Excellent
Abrasion Resistance	Poor	Poor	Average	Poor	Excellent
UV Radiation Resistance	Average	Average	Poor	Good	Excellent
Artificial Atmospheric Agents	Poor	Poor	Good	Good	Excellent
Colour Retention	Average	Average	Poor	Poor	Excellent
Gloss Retention	Poor	Poor	Poor	Poor	Excellent
Chemical Resistance	Good	Good	Good	Poor	Excellent
Severe Chemical Attack	Poor	Poor	Average	Poor	Excellent
Temperature Resistance	140°F	196°F	350°F	505°F	600°F
Thermal Shock Resistance	Good	Good	Poor	Good	Excellent
Carbon Dioxide Permeability	Poor	Poor	Good	Poor	Excellent
Permeability water vapour	Average	Average	Good	Average	Excellent
Water Absorption Rate	5-15%	1%	2%	3%	0%
Aging at 158°F	Poor	Poor	Good	Average	Excellent
Adhesion Strenght Pull-off	Poor	Average	Good	Poor	Excellent
Impact Resistance	Poor	Average	Good	Poor	Excellent
Anti-Graffiti	No	No	No	No	Yes
Anti-Termite (Wood)	No	No	No	No	Yes
Hydrophobic Self Cleaning	No	No	No	No	Yes
Easy to Clean	No	No	No	No	Yes
Total Solar Reflectance (TSR)	60 (white)	60 (white)	60 (white)	60 (white)	88 (white)
Expected Lifetime in Years	<7	<7	<5-15	<5-15	15-30+

## Ceramic Coating & Paint System

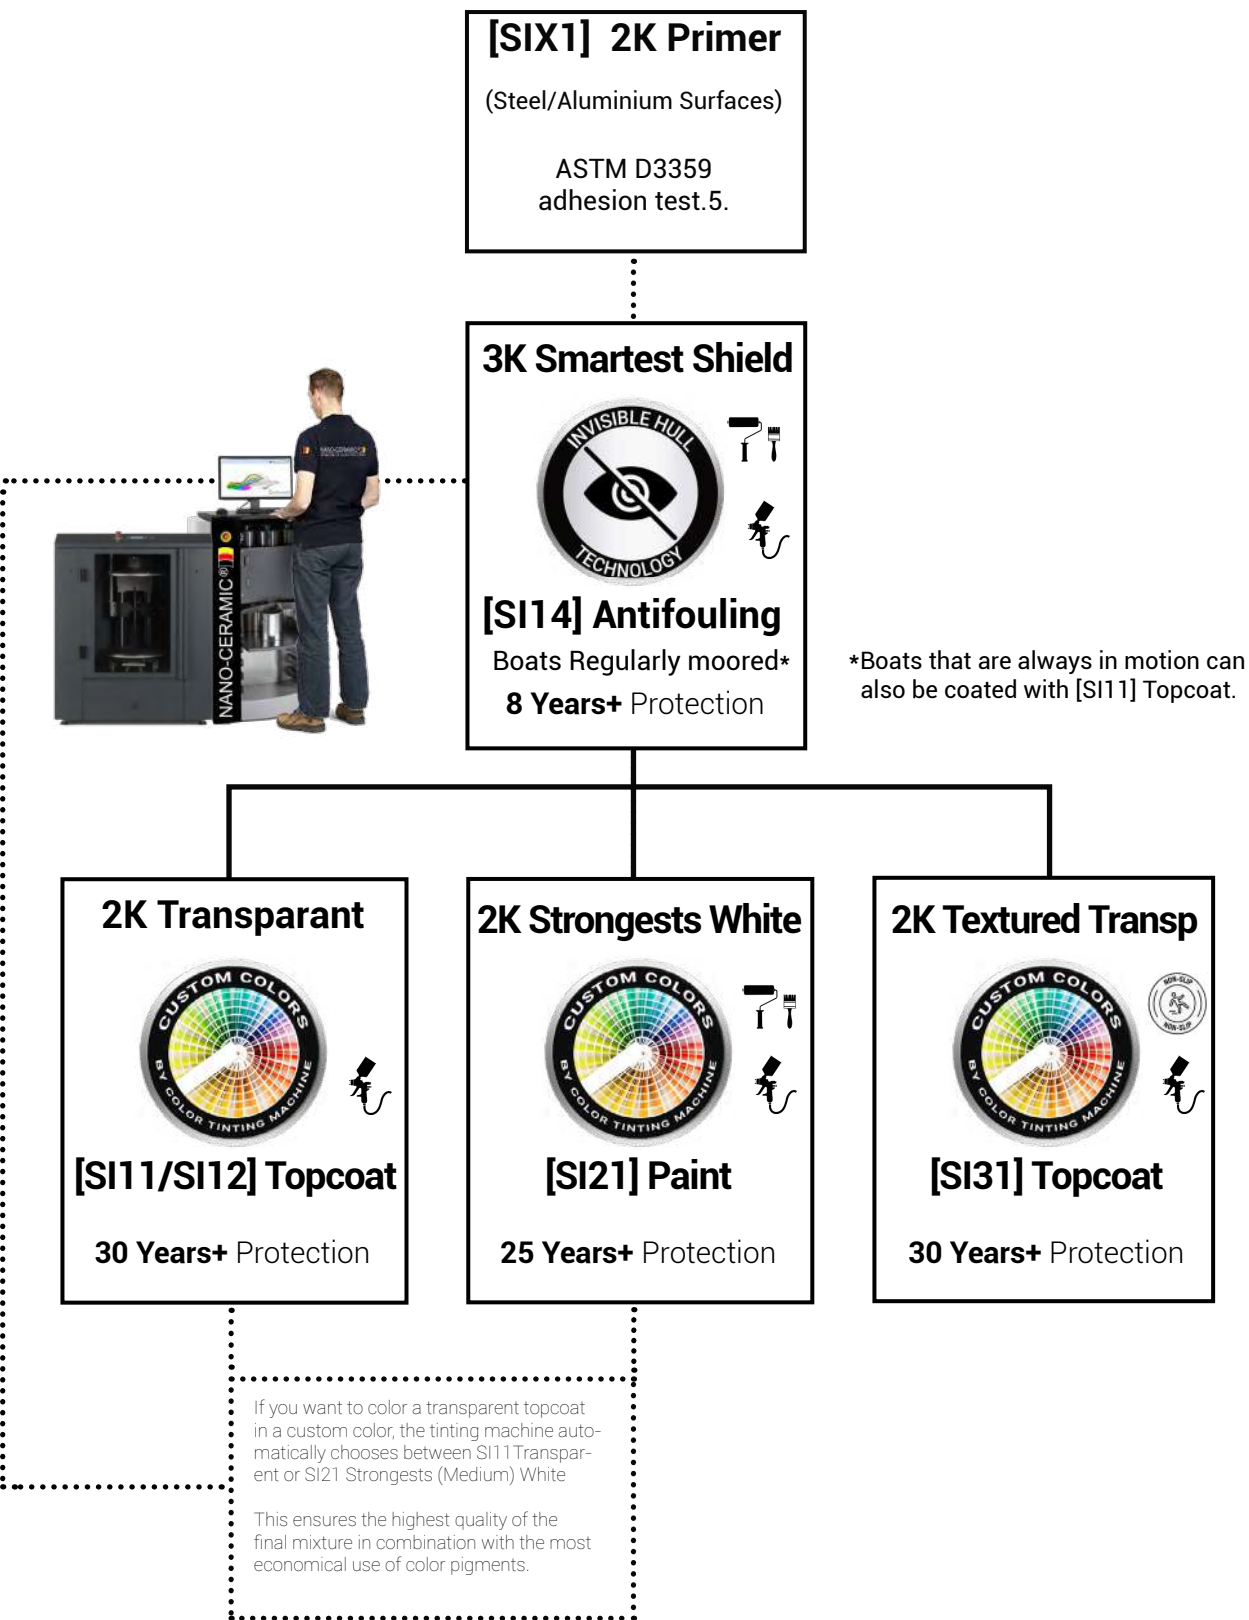



APPLY  
VIDEO  
SCAN  
QR CODE

# SI11

2-Component (2K)

## Topcoat Transparent

for glossy surfaces

<b>Product ID</b>	: SI112000 67 oz / 4.2 lbs
<b>Consumption</b>	: 3 layers 0.06 lbs/ft <sup>2</sup> - 0.96 oz/ ft <sup>2</sup> = 3 mil/ 70 ft <sup>2</sup>
<b>Reachable area</b>	: 2 layers 0.04 lbs/ft <sup>2</sup> - 0.64 oz/ ft <sup>2</sup> = 2 mil/140 ft <sup>2</sup> : 1 layer 0.02 lbs/ft <sup>2</sup> - 0.32 oz/ ft <sup>2</sup> = 1 mil/210 ft <sup>2</sup>
<b>Hardness</b>	: H9
<b>Used for</b>	: Fiberglass, steel, aluminium, plastics, wood
<b>Application field</b>	: Marine, exteriors, interiors

SI11 is an incredibly strong 2-component paint system which forms a durable matrix of molecular bonds (transformation to ceramic) resulting in permanent protection of the surface.

Three simple steps: Clean, Dry, and Apply.

- Easily repels water, dirt, dust, and pollutants.
- This coating is permanent hydrophobic.
- Restores damaged finishes and reduces cleaning intervals.
- Resistant to all kinds of chemicals and UV radiation.
- Superior anti-pollution and anti-corrosion properties.
- This coating can withstand temperatures of 600°F.

Expected Life Duration up to 30 years+



How to use: Page 30

- Easy to apply**
- Repaintable**
- Cut maintenance costs**
- Anti-water spot**
- Anti-corrosion**
- Permanent hydrophobic**
- Self-cleaning**
- stays cleaner longer**
- Anti-scratch**
- Impact Resistance**  
2 lbs -2.6 ft
- Protects your investment**



TEST  
REPORT  
SCAN QR  
CODE

# SI12

2-Component (2K)

## Topcoat Transparent

for matted surfaces

<b>Product ID</b>	: SI112000 67 oz / 4.4 lbs
<b>Consumption</b>	: 3 layers 0.06 lbs/ft <sup>2</sup> - 0.96 oz/ ft <sup>2</sup> = 3 mil/ 70 ft <sup>2</sup>
<b>Reachable area</b>	: 2 layers 0.04 lbs/ft <sup>2</sup> - 0.64 oz/ ft <sup>2</sup> = 2 mil/140 ft <sup>2</sup> : 1 layer 0.02 lbs/ft <sup>2</sup> - 0.32 oz/ ft <sup>2</sup> = 1 mil/210 ft <sup>2</sup>
<b>Hardness</b>	: H9
<b>Used for</b>	: Fiberglass, steel, aluminium, plastics, wood
<b>Application field</b>	: Marine, exteriors, interiors

SI12 is an incredibly strong 2-component paint system which forms a durable matrix of molecular bonds (transformation to ceramic) resulting in permanent protection of the surface.

Three simple steps: Clean, Dry, and Apply.

- Easily repels water, dirt, dust, and pollutants.
- This coating is permanent hydrophobic.
- Restores damaged finishes and reduces cleaning intervals.
- Resistant to all kinds of chemicals and UV radiation.
- Superior anti-pollution and anti-corrosion properties.
- This coating can withstand temperatures of 600°F.

Expected Life Duration up to 30 years+



How to use: Page 30

- Easy to apply**
- Repaintable**
- Cut maintenance costs**
- Anti-water spot**
- Anti-corrosion**
- Permanent hydrophobic**
- Self-cleaning**
- stays cleaner longer**
- Anti-scratch**
- Impact Resistance**  
2 lbs -2.6 ft
- Protects your investment**





# SI21

2-Component (2K)

## Paint The Strongest White for glossy surfaces

<b>Product ID</b>	: SI212000 67 oz / 5.3 lbs
<b>Consumption</b>	: 3 layers 0.044 lbs/ft <sup>2</sup> - 0.56 oz/ ft <sup>2</sup> = 3 mil/120 ft <sup>2</sup>
<b>Reachable area</b>	: 2 layers 0.030 lbs/ft <sup>2</sup> - 0.37 oz/ ft <sup>2</sup> = 2 mil/160 ft <sup>2</sup> : 1 layer 0.014 lbs/ft <sup>2</sup> - 0.19 oz/ ft <sup>2</sup> = 1 mil/240 ft <sup>2</sup>
<b>Hardness</b>	: H8
<b>Used on</b>	: Gelcoat, fiberglass, steel, aluminium, plastics, wood
<b>Application field</b>	: Marine Exteriors

SI21 is an incredibly strong 2-component paint system which forms a durable matrix of molecular bonds (transformation to ceramic) resulting in permanent protection of the surface.

Three simple steps: Clean, Dry, and Apply.

- Easily repels water, dirt, dust, and pollutants.
- This coating does not absorb any water
- Resistant to all kinds of chemicals and UV radiation.
- This coating can withstand temperatures of 600°F

Expected Life Duration up to 25 year+



How to use: Page 30

- Easy to apply Repaintable**
- Cut maintenance costs**
- Anti-water spot Anti-corrosion**
- Permanent hydrophobic**
- Self-cleaning stays cleaner longer**
- Anti-scratch**
- Impact Resistance 2lbs/2.6ft**
- Protects your investment**



# SI14

3-Component (3K)


## The Smartest White black/red/blue/grey/transparent

<b>Product ID</b>	: SI141000-BK-RD-BL-GR 32 oz / 2.4 lbs : SI144000-BK-RD-BL-GR 1 gal / 9.5 lbs
<b>Consumption</b>	: 2 layers 0.08 lbs/ft <sup>2</sup> -1.30 oz/ft <sup>2</sup> = 8 mil/140 ft <sup>2</sup>
<b>Reachable area</b>	: 1 layer 0.04 lbs/ft <sup>2</sup> -0.65 oz/ft <sup>2</sup> = 4 mil/280 ft <sup>2</sup>
<b>Hardness</b>	: H7
<b>Used for</b>	: Gelcoat, fiberglass, steel, aluminium, plastics, wood
<b>Application field</b>	: Marine Antifouling

SI14 is a revolutionary High-Tech Ceramic Antifouling Paint with a self-polishing amphiphilic biofilm that masks the boat hull surface to the marine organisms.

This world's leading antifouling stores more and releases less non-biocidal agents, resulting in by far the longest maintenance interval of 8 year+ currently available.

How Biofilms form:

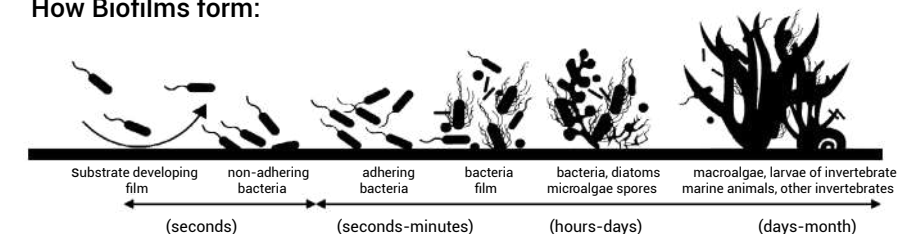

How to use: Page 30

- Easy to apply Repaintable**
- Amphiphilic Invisible Hull Technology**
- Cut maintenance costs**
- Organic Copper and Tin Non Biocidal**
- Super Sleek Surface Algae release <6 knots**
- Self-cleaning stays cleaner longer**
- Save fuel**
- Impact Resistance 2lbs - 2.6ft**
- Thermal Shock-Resistant**





# SI31

2-Component (2K)

## Textured Transparent Semi Gloss antislip - high impact resistant

<b>Product ID</b>	: SI312000 67 oz / 4.6 lbs
<b>Consumption</b>	: 3 layers 0.050 lbs/ft <sup>2</sup> - 0.76 oz/ ft <sup>2</sup> = 3 mil/ 90 ft <sup>2</sup>
<b>Reachable area</b>	: 2 layers 0.033 lbs/ft <sup>2</sup> - 0.51 oz/ ft <sup>2</sup> = 2 mil/180 ft <sup>2</sup> : 1 layer 0.017 lbs/ft <sup>2</sup> - 0.25 oz/ ft <sup>2</sup> = 1 mil/270 ft <sup>2</sup>
<b>Hardness</b>	: H9
<b>Used on</b>	: Gelcoat, fiberglass, steel, aluminium, : plastics, wood, virtually any surface.
<b>Application area</b>	: Buildings, marine, offshore structures, bridges, etc

SI31 is a clear solvent-based ceramic coating, linked with a ceramic activator, available in semi-gloss and includes sprayable nano particles. Known for its exceptional durability, this coating easily applies to any organic surface without needing a primer. Its textured design makes it perfect for anti-slip needs.

- Easily repels water, dirt, dust, and pollutants.
- This coating has an outstanding hydrophobic effect.
- Resistant to all kinds of chemicals and UV radiation.
- This coating can withstand temperatures of 600°F.
- Zero absorption, waterproof, insulation and heat rejecting

Expected Life Duration up to 30 years+




How to use: Page 30

-  **Easy to apply**  
**Repaintable**
-  **Cut maintenance**
-  **Anti-water spot**  
**Anti-corrosion**
-  **Permanent hydrophobic**
-  **Self-cleaning**  
**stays cleaner longer**
-  **Anti-scratch**
-  **Visibility safety**
-  **Protects your investment**
-  **Impact Resistance**  
**2lbs/2.6ft**

## Maintenance Plan Thin Film Coating



**Step 1**  
Washing



**Step 2**  
Polishing




**Step 3**  
Steril Cleaner



**Step 4**  
Basecoat  
Curing time: 2 hours  
after application




**Step 5**  
Nano Layer  
Hydrophobic  
Topcoat



**Step 6**  
Curing time:  
6 hours in  
ambient  
temperature

## Where to use our coatings:

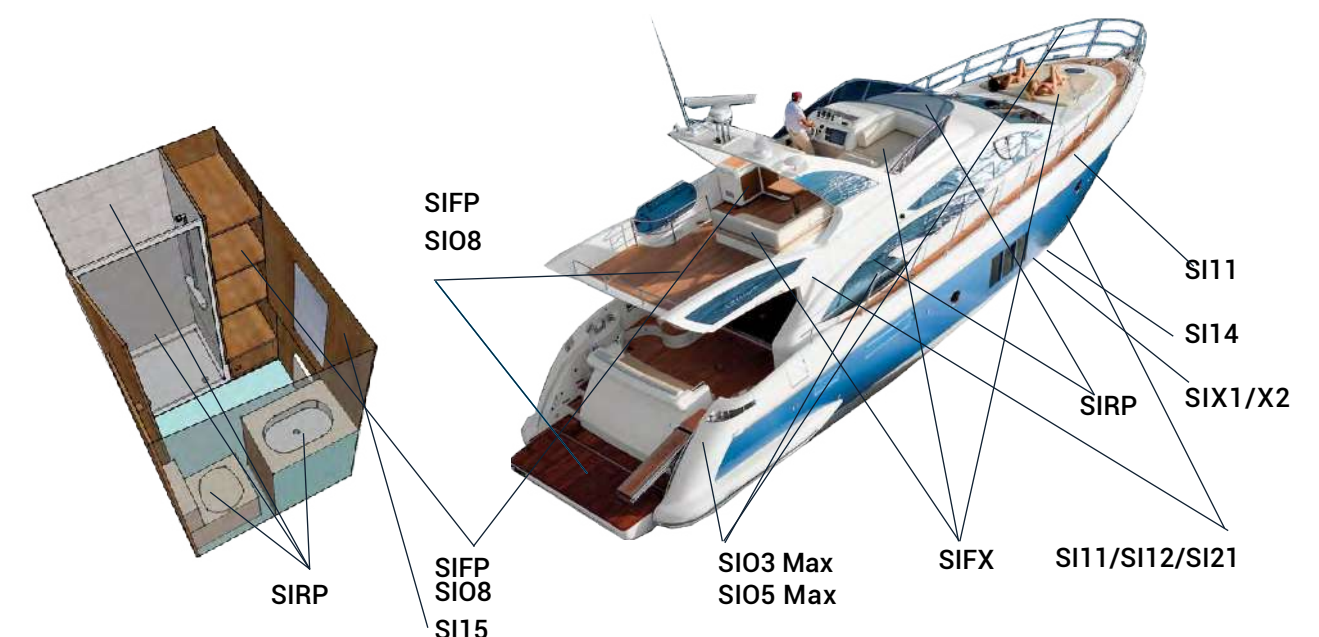



# Color mixing has never been so easy!!!

X- SMART is the modular version of the acclaimed dispenser series, extremely cost-effective and easy to operate, with a low maintenance

This color mixer has a robust and tubeless design, built with a patented pump technology (to reduce waste) and identical features, making it a highly advanced dispenser, ideally suited to reduced capacity.



Prisma-RT is a cloud-based innovative mobile color application compatible with the X-SMART dispenser. It brings the best of wireless technology without the associated investment costs in hardware. Customers do not have to provide computers and other accessories or set up servers, eliminating the need for complicated and time-consuming installation and configuration. This smart Prisma-RT device helps to fix prices and taxes and can print labels via Wi-Fi.



X-SMART  
Stabilizer plates

# 16 High Grade Coloring chemicals



**Titanium White**  
Masstone   
Tint   
844-0061 1.05 gal



**Quinacridone Red**  
Masstone   
Tint   
844-0451 32 oz



**Scarlet Red**  
Masstone   
Tint   
844-0526 32 oz



**Lead Free Orange**  
Masstone   
Tint   
844-0982 32 oz



**Trans Red Oxide**  
Masstone   
Tint   
844-1054 32 oz



**Red Oxide**  
Masstone   
Tint   
844-1063 32 oz



**Burnt Umber**  
Masstone   
Tint   
844-1352 32 oz



**Trans Yellow Oxide**  
Masstone   
Tint   
844-1852 32 oz



**Yellow Oxide**  
Masstone   
Tint   
844-1863 32 oz



**Lead Free Med Yellow**  
Masstone   
Tint   
844-2555 32 oz



**Yellow**  
Masstone   
Tint   
844-2826 32 oz



**Organic Yellow**  
Masstone   
Tint   
844-2852 32 oz



**PHTHALO Green**  
Masstone   
Tint   
844-5558 32 oz



**Quinacridone Violet**  
Masstone   
Tint   
844-9451 32 oz



**Lamp Black**  
Masstone   
Tint   
844-9955 32 oz



**PHTHALO BLUE**  
Masstone   
Tint   
844-7262 32 oz

Color card

Residential

SI13 White Egg-Shell (Flat Finish) 15/25 (20/60°)

SI15 White Egg Shell (Flat Finish) 18/28 (20/60°)

SI21 White Gloss 49/77 (20/60°)

SI22 White Satin 33/59 (20/60°)

RAL 9018

RAL 9022

RAL 9002

RAL 9003

RAL 9004

RAL 9005

RAL 9006

RAL 9007

RAL 9010

RAL 9011

RAL 9016

SI41 Textured White Semi Gloss 41/69 (20/60°)

SI42 Textured White Matte 11/21 (20/60°)

Papyrus white

Pearl light grey

Pearl dark grey

Green beige

Beige

Brownbeige

Pearl white

Ivory

Light Ivory

Traffic black

RAL 3015

RAL 5007

RAL 4009

RAL 6027

RAL 7030

RAL 1036

RAL 8029

RAL 6012

RAL 5025

RAL 6036

RAL 8016

Light pink

Pastel blue

Pastell violet

Light green

Squirrel grey

Pearl gold

Pearl copper

Pearl blackberry

Pearl gentian blue

Pearl opal green

Mahogany braun

Wood

SI11 Transparent Gloss 51/78 (20/60°)

SI12 Transparent Matte 11/21 (20/60°)

SI11 Transparent

SI11 Light

SI11 Nut

SI11 Colonial

Industrial

SI11 Transparent Gloss 51/78 (20/60°)

SI21 White Gloss 49/77 (20/60°)

SI22 White Satin 33/59 (20/60°)

Transparent

Lumious yellow

Traffic red

Jet black

Golden yellow [Cat]

Leaf green [J.D Deere]

Light grey

Dark grey

Silver grey

Signal brown

Pale brown

Marine

SI12 Transparent Matte 11/21 (20/60°)

SI41 Textured White Semi Gloss 41/69 (20/60°)

SI42 Textured White Matte 11/21 (20/60°)

Cool white

Pure white

Cream white

Distant blue

Traffic yellow

Silver gray

Light Ivory

Pure white

Cream

Beige

Olive yellow

Military

SI31 Textured Transparent Semi Gloss 41/69 (20/60°)

SI33 Textured Black Semi Gloss 41/69 (20/60°)

Fire red

Burgundy

Platinum

Jet Black

Turquoise bleu

Light green

Violet blue

Light blue

Ultramarine blue

Sapphire blue

Signal blue

Antifouling

SI14 Color 31/41 (20/60°)

Transparent

Jet Black

Signal Red

Ultra marine blue

Signal Grey





## What is NANO-CERAMIC UVA Topcoat?

NANO-CERAMIC® UVA Topcoat is a revolutionary low-VOC, non-PFAS, self-leveling protective coating system that forms an ultra-hard, glass-like hydrophobic barrier—ideal for high-performance marine environments.

Specifically engineered for extreme durability and a sleek, high-gloss finish, UVA Topcoat delivers exceptional resistance to saltwater, intense UV exposure, biofouling, and harsh marine chemicals like hydrofluoric acid (HF), hydrochloric acid, and citric acid—all while remaining completely safe and compliant for onboard use (Food contact safe).

Powered by advanced nanotechnology, UVA Topcoat extends the lifespan of marine surfaces by protecting polyester, epoxy, polyurethane, and acrylic resins steel, aluminum, composites, and wood from corrosion, surface breakdown, and environmental wear. —making it an exceptionally versatile solution for virtually any surface.

## Why UVA Topcoat is a Game-Changer in Marine Protection?

For decades, protective coatings like epoxy, polyurethane (PU), and acrylic have been the industry standard. However, they all share a critical weakness—UV degradation. Prolonged exposure to sunlight causes these coatings to yellow, crack, and deteriorate, leading to costly maintenance and premature failures.

## Where can UVA Topcoat be applied in Marine use?

UVA Topcoat is highly versatile and suitable for a wide range of marine applications:


- Yachts & Boats – Hulls, decks, topsides, and superstructures
- Speedboats – UV protection and ultra-slick finish for high-performance watercraft
- Marine Infrastructure – Docks, piers, pontoons, and submerged structures
- Ship Interiors – Tables, countertops, cabins, walls, and decorative panels
- Commercial Vessels – Outer hulls, ballast tanks, walkways, and engine rooms
- Antifouling Protection – Ideal for vessels in constant motion or those stored on land

Compatible with both new builds and retrofits, UVA Topcoat adapts to various marine substrates and operating conditions with ease.

## Can our hydrophobic coatings boost speed and cut fuel use?

Yes—our superhydrophobic sleek surface reduces drag by up to 23.4%, leading to 31% faster acceleration compared to uncoated surfaces and 27% faster than conventional antifouling coatings (Source: IPTEK ITS, 2023).

## How it Works

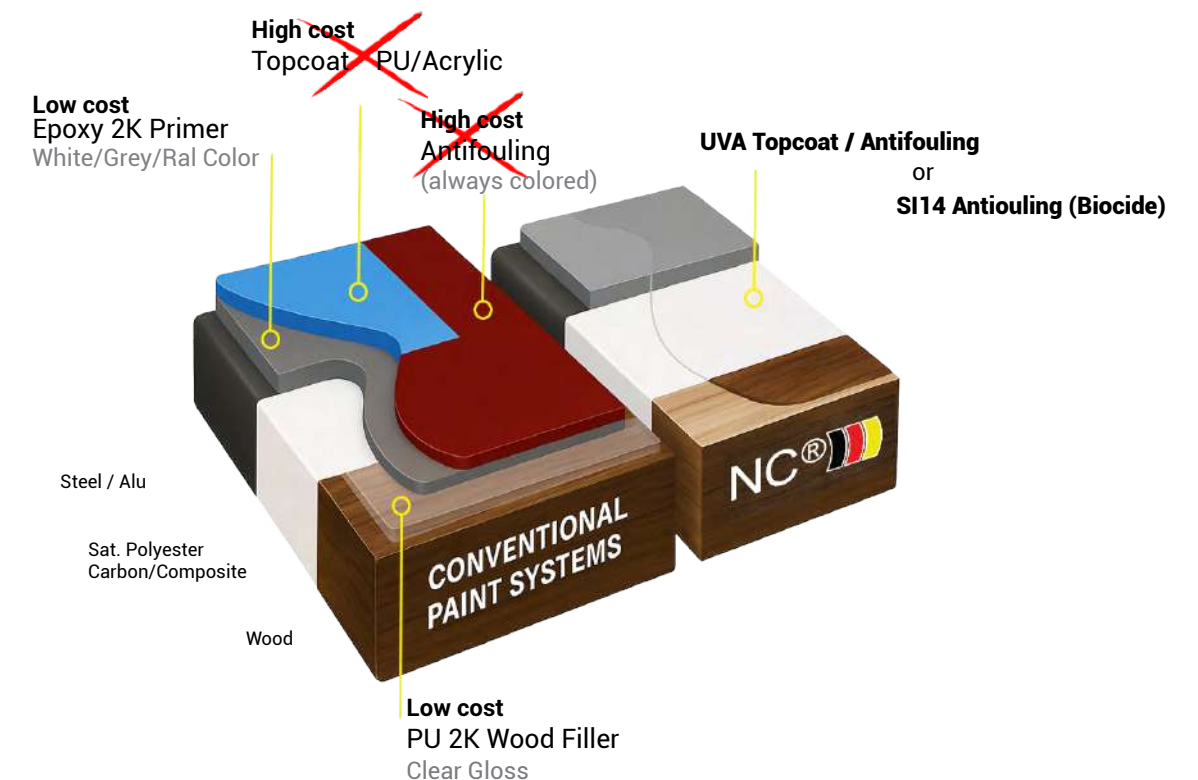

## Superior Performance at the Lowest Cost.

UVA Topcoat isn't just another coating—it's a next-generation solution that replaces complex and expensive multi-layer systems with a single, high-performance layer.

By applying directly over low-cost primers, UVA Topcoat eliminates the need for expensive finishing coats. Its smart chemistry and simplified process make traditional topcoat systems outdated by comparison.

Whether for industrial, marine, infrastructure, or decorative use, UVA Topcoat simplifies your process and multiplies your value—proving that true performance doesn't have to come at a high price.

Freedom in Protection Years

Long-Lasting Protection, Layer by Layer  
A single 6 µm (micron) layer applied using HVLP spray technology can provide up to 8 years of protection. Need more durability? Just add more layers—it's that simple.



Apply wet-on-wet: once the first coat flashes off (dry to the touch but still tacky), you can immediately apply the next. This method prevents trapped gases and creates a seamless, chemical-resistant film with hydrophobic properties—making surfaces easier to clean and maintain.

Coverage & Application Efficiency

UVA Topcoat is engineered for maximum efficiency with minimal material use—delivering high-performance protection at a fraction of the volume required by traditional coatings.  
Recommended usage is approximately ±0.025 lbs/ft² per layer (by wipe or spray), resulting in a film thickness of around 6 microns, with one liter covering up to 800 ft².

Color Tinting Option for Marine Applications


For customized aesthetics, UVA Topcoat can be tinted using our colorants on page 22-23. These high-performance, solvent-free pigments provide long-lasting color stability and UV resistance—perfect for marine environments where both protection and appearance matter. Ideal for yachts, decks, interiors, or any visible surface requiring a durable, colored finish without compromising the coating's hydrophobic and chemical-resistant properties.

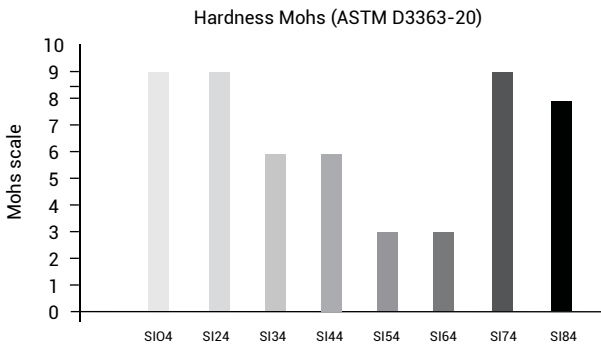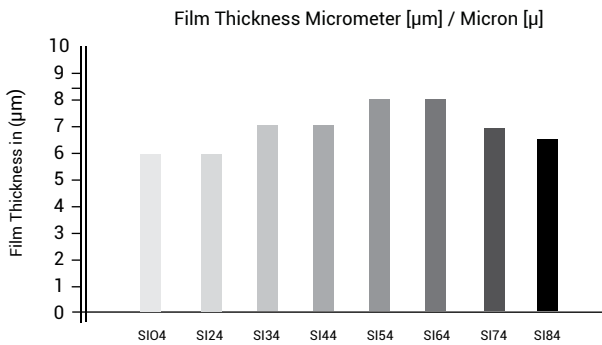

Quality Comparison of paints technologies

In case written in bold font it means existing shortcomings in quality.

Characteristics	Acrylic Latex walls ceilings	Acrylic walls floors	Epoxy floors	Polyurethane waterproofing	UVA Topc all surfaces
Primer	Yes	Yes	Yes	Yes	No
Adhesion Strength	Poor	Poor	Poor	Poor	Excellent
Cross Cut Test	Poor	Poor	Good	Poor	Excellent
Abrasion Resistance	Poor	Poor	Average	Poor	Excellent
UV Radiation Resistance	Average	Average	Poor	Good	Excellent
Artificial Atmospheric Agents	Poor	Poor	Good	Good	Excellent
Colour Retention	Average	Average	Poor	Poor	Excellent
Gloss Retention	Poor	Poor	Poor	Poor	Excellent
Chemical Resistance	Good	Good	Good	Poor	Excellent
Severe Chemical Attack	Poor	Poor	Average	Poor	Excellent
Temperature Resistance	140°F	196°F	350°F	505°F	550°F
Thermal Shock Resistance	Good	Good	Poor	Good	Excellent
Carbon Dioxide Permeability	Poor	Poor	Good	Poor	Excellent
Permeability water vapour	Average	Average	Good	Average	Excellent
Water Absorption Rate	5-15%	1%	2%	3%	0%
Aging at 70°C	Poor	Poor	Good	Average	Excellent
Adhesion Strenght Pull-off	Poor	Average	Good	Poor	Excellent
Impact Resistance	Poor	Average	Good	Poor	Excellent
Anti-Graffiti	No	No	No	No	Yes
Anti-Termite (Wood)	No	No	No	No	Yes
Hydrophobic Self Cleaning	No	No	No	No	Yes
Easy to Clean	No	No	No	No	Yes
Total Solar Reflectance (TSR)	60 (white)	60 (white)	60 (white)	60 (white)	88 (white)
Expected Lifetime in Years	<7	<7	<5-15	<5-15	8/16/24

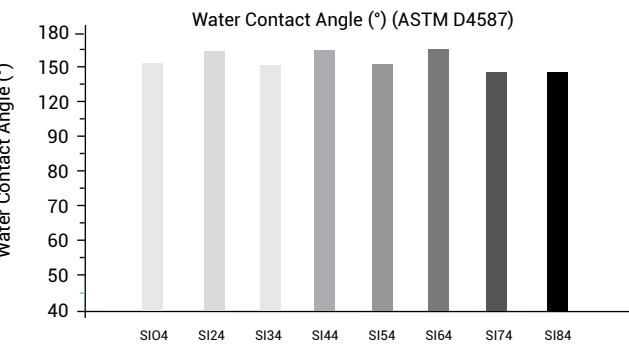





# SIO4

1-Component (2K)

## Topcoat Transparent

for glossy surfaces

**Product ID** : SIO41LUVA 32 oz / 2.03 lbs SIO405UVA 16 oz / 1 lbs  
**Consumption** : 3 layers +/- 0.075 lbs/ft<sup>2</sup> - 0.12 oz/ft<sup>2</sup> 18 micron = 200 ft<sup>2</sup>  
**Reachable area** : 2 layers +/- 0.050 lbs/ft<sup>2</sup> - 0.08 oz/ft<sup>2</sup> 12 micron = 400 ft<sup>2</sup>  
 : 1 layer +/- 0.025 lbs/ft<sup>2</sup> - 0.04 oz/ft<sup>2</sup> 6 micron = 800 ft<sup>2</sup>  
**Hardness/Cupping** : H9 / Flexibility ISO 1520 >21mm  
**Used for** : Fiberglass, steel, aluminium, plastics, wood  
**Application field** : Marine, exteriors, antifouling interiors

SIO4 is an incredibly strong 1-component paint system which forms a durable matrix of molecular bonds (transformation to ceramic) resulting in permanent protection of the surface.

Three simple steps: Clean, Dry, and Apply.

- Easily repels water, dirt, dust, and pollutants.
- This coating is permanent hydrophobic.
- Restores damaged finishes and reduces cleaning intervals.
- Resistant to all kinds of chemicals and UV radiation.
- Superior anti-pollution and anti-corrosion properties.
- This coating can withstand temperatures of 550°F.

Expected life duration 4-16 or 24 Years (layer thickness)



How to use: Page 31

- Easy to apply Repaintable**
- Cut maintenance costs**
- Anti-water spot Anti-corrosion**
- Permanent hydrophobic**
- Self-cleaning stays cleaner longer**
- Anti-scratch**
- Impact Resistance 30"-2lbs**
- Protects your investment**



# SI24

1-Component (1K)

## Topcoat Transparent

for matte surfaces

**Product ID** : SI241LUVA 32 oz / 2.13 lbs SI2405UVA 16oz / 1.05 lbs  
**Consumption** : 3 layers +/- 0.075lbs/ft<sup>2</sup> - 0.12oz/ft<sup>2</sup> 18 micron = 200ft<sup>2</sup>  
**Reachable area** : 2 layers +/- 0.050lbs/ft<sup>2</sup> - 0.08oz/ft<sup>2</sup> 12 micron = 400ft<sup>2</sup>  
 : 1 layer +/- 0.025lbs/ft<sup>2</sup> - 0.04oz/ft<sup>2</sup> 6 micron = 800ft<sup>2</sup>  
**Hardness/Cupping** : H9 / Flexibility ISO 1520 >21mm  
**Used for** : Fiberglass, steel, aluminium, plastics, wood  
**Application field** : Marine, exteriors, interiors

SI04 is an incredibly strong 1-component paint system which forms a durable matrix of molecular bonds (transformation to ceramic) resulting in permanent protection of the surface.

Three simple steps: Clean, Dry, and Apply.

- Easily repels water, dirt, dust, and pollutants.
- This coating is permanent hydrophobic.
- Restores damaged finishes and reduces cleaning intervals.
- Resistant to all kinds of chemicals and UV radiation.
- Superior anti-pollution and anti-corrosion properties.
- This coating can withstand temperatures of 550°F.

Expected life duration 8-16 or 24 Years (layer thickness)



How to use: Page 31

- Easy to apply Repaintable**
- Cut maintenance costs**
- Anti-water spot Anti-corrosion**
- Permanent hydrophobic**
- Self-cleaning stays cleaner longer**
- Anti-scratch**
- Impact Resistance 30"-2lbs**
- Protects your investment**



# Marine-Grade Color Protection — Super Transparent

For boats where weight, speed, and durability matter, our advanced hybrid coating system offers a breakthrough: vibrant transparent tints or metallic finishes without sacrificing performance. By blending NANO-CERAMIC® Super Transparent Colorants into our UVA Topcoat, you get:

- Ultra-thin coating (<15 microns) = minimal weight
- H9 surface hardness = max scratch resistance
- Hydrophobic & anti-fouling = fast cleaning, less drag
- UV & salt resistant = marine-grade longevity
- Clear or colored: keep visibility through glass or plexi
- Optional metallic effect for custom marine finishes

Perfect for:

- Plexiglass hatches & windscreens
- Cabin glass, partitions, skylights
- Carbon fiber panels & consoles
- Stainless/aluminum trims & detailing



**YELLOW A-N4G 100-ST**  
Masstone  
Tint  
279376 3.2 oz



**RED A-P2Y 100-ST**  
Masstone  
Tint  
289404 3.2 oz



**PINK A-EB 100-ST**  
Masstone  
Tint  
287516 3.2 oz



**BLUE A-BTR 100-ST**  
Masstone  
Tint  
290247 3.2 oz



**BLUE A-BTG 100-ST**  
Masstone  
Tint  
275536 3.2 oz



**GREEN A-GBX 100-ST**  
Masstone  
Tint  
323291 3.2 oz



**BLACK A-NB 100-ST**  
Masstone  
Tint  
289518 3.2 oz



**BLACK A-NY 100-ST**  
Masstone  
Tint  
272060 3.2 oz



**TR.OXIDE YELLOW A-2R 130**  
Masstone  
Tint  
77492-1 3.2 oz



**TRANSOXIDE RED A-G 130**  
Masstone  
Tint  
77491-1 3.2 oz



**YELLOW A-F2G 100**  
Masstone  
Tint  
11785 3.2 oz



**YELLOW A-H3G 100**  
Masstone  
Tint  
11781 3.2 oz



**YELLOW A-HRD 100**  
Masstone  
Tint  
21108 3.2 oz



**ORANGE A-HLD 100**  
Masstone  
Tint  
11780 3.2 oz



**RED A-D3GD 130**  
Masstone  
Tint  
56110 3.2 oz



**PINK A-E 130**  
Masstone  
Tint  
73915 3.2 oz



**RED VIOLET A-ER 130**  
Masstone  
Tint  
73900 3.2 oz



**VIOLET A-RL 100**  
Masstone  
Tint  
51319 3.2 oz



**BLUE A-BG 100**  
Masstone  
Tint  
74160 3.2 oz



**GREEN A-GNX 130**  
Masstone  
Tint  
74260 3.2 oz



**BLACK A-N 100**  
Masstone  
Tint  
77266 3.2 oz



**OXIDE YELLOW A-BV 100**  
Masstone  
Tint  
771740 3.2 oz



**OXIDE YELLOW A-CR 100**  
Masstone  
Tint  
77310 3.2 oz



**OXIDE YELLOW A-R 100**  
Masstone  
Tint  
77492 3.2 oz



**OXIDE RED A-B 100**  
Masstone  
Tint  
77491 3.2 oz



**WHITE A-R 100**  
Masstone  
Tint  
77891 3.2 oz

# Lightweight, Ultra-Hard, Built for Speed. Opaque Ral



# SIX1

2-Component (2K)

## Primer Epoxy Polyamide

heavy duty - anti-corrosion



**Product ID** : SIX11250-WH/GR 42 oz / 3.2 lbs SIX15000-WH/GR 1.32 gal / 12.8 lbs  
**Consumption** : 2 layers +/- 0.53 lbs/ft<sup>2</sup> - 0.7oz/ft<sup>2</sup> 80 micron = 50 ft<sup>2</sup>  
**Reachable area** : 1 layer +/- 0.26 lbs/ft<sup>2</sup> - 0.4oz/ft<sup>2</sup> 40 micron = 100 ft<sup>2</sup>  
**Hardness** : H5  
**Colors** : White, Grey or RAL (RAL Minimum Order 250 pcs 1.32 gal)  
**Used on** : Concrete, Steel, Aluminium, Fiberglass and other organic surfaces



**Fast Repaintable**



**Excellent adhesion**

**Application area** : Buildings, marine, airports, offshore structures, bridges

SIX1 is a solvent based epoxy polyamide primer. This primer is used for corrosion protection on concrete, stainless, galvanized, carbon and alloy steel, aluminum in corrosive conditions and has excellent adhesion to all organic substrates and to all of our ceramic topcoats. The primer can be applied at a relative humidity of 40-80% and can be painted over within 8 hours 85°F, 1 hours 140°F.

# SIX2

2-Component (2K)

## Primer Surfacer Acrylic Alkyd

smooth - surface modifier



**Product ID** : SIX21250-WH/GR 42 oz / 3.2 lbs SIX25000-WH/GR 1.32 gal / 12.8 lbs  
**Consumption** : 2 layers +/- 0.44 lbs/ft<sup>2</sup> - 0.7 oz/ft<sup>2</sup> 60 micron = 60 ft<sup>2</sup>  
**Reachable area** : 1 layer +/- 0.22 lbs/ft<sup>2</sup> - 0.4 oz/ft<sup>2</sup> 30 micron = 120 ft<sup>2</sup>  
**Hardness** : H3  
**Colors** : White or Grey  
**Used on** : Steel, aluminium, wood, fiberglass, and old paint systems.  
**Application area** : Buildings, marine, airports, bridges



**Fast Repaintable**



**Excellent adhesion**



**VOC Free**

SIX2 High-quality 2K surfacer (two-component basecoat) for auto-refinish, marine, and industrial coating applications where a smooth surface is required. The primer has excellent adhesion to all organic substrates and to all of our ceramic topcoats. The primer can be applied at a relative humidity of 30-80% and can be painted over within 4 hours 85°F, 1 hours 140°F.



## Heavy Duty Primer - Smooth Surfacer



# SIX3

2-Component (2K)

## Primer PU Wood Filler

surface modifier - absorption reducer

**Product ID** : SIX31500 51 oz / 3.3 lbs  
**Consumption** : 2 layers +/- 0.40 lbs/ft<sup>2</sup> - 0.6 oz/ft<sup>2</sup> 60 micron = 80 ft<sup>2</sup>  
**Reachable area** : 1 layer +/- 0.20 lbs/ft<sup>2</sup> - 0.3 oz/ft<sup>2</sup> 30 micron = 120 ft<sup>2</sup>  
**Hardness** : H4  
**Used on** : Steel, Aluminium and other organic surfaces  
**Application area** : Buildings, marine, airports, offshore structures, bridges

SIX3 is a solvent borne transparent wood filler. This primer is used as surface modification for, wood or natural stone to reduce capillary absorption and has an excellent adhesion to all organic substrates and towards one of our ceramic top coats. The primer can be applied at a relative humidity of 40-80%.



**Fast Repaintable**



**Excellent adhesion**



## Wood or Natural Stone - Filler

# SIX4

1-Component (1K)

## Primer Acrylic Waterbased

all surfaces modifier - stain killer

**Product ID** : SIX41000-WH/GR 32 oz / 2.65 lbs SIX44000-WH/GR 1 gal / 10.6 lbs  
**Consumption** : 2 layers +/- 0.53 lbs/ft<sup>2</sup> - 0.7 oz/ft<sup>2</sup> 80 micron = 50 ft<sup>2</sup>  
**Reachable area** : 1 layer +/- 0.26 lbs/ft<sup>2</sup> - 0.4 oz/ft<sup>2</sup> 40 micron = 100 ft<sup>2</sup>  
**Hardness** : H3  
**Colors** : White, Grey or RAL (RAL Minimum Order 250 pcs 1 gal)  
**Used on** : Concrete, wood, drywalls and old waterbased paints  
**Application area** : Buildings, walls and ceilings indoor or outdoor



**Fast Repaintable**



**Excellent adhesion**



**VOC Free**

SIX4 Acrylic Water-Based Primer is a premium, all-purpose primer-sealer with excellent adhesion, stain-blocking, and hiding power. Ideal for both interior and exterior surfaces, it bonds to glossy surfaces without sanding, effectively blocks stains, and provides a smooth foundation for any solvent-based or water-based topcoat.







## How to use our Permanent Coating System:

These products can be stored for up to 24 months (*in a dry, temperature-stable dark environment*)

### Processing Temperature:

Ambient temperature: 41-86°F  
Avoid direct sunlight, Rain and /or high humidity.

### IMPORTANT:

Before you use a NANO-CERAMIC product, please make sure you wear suitable protection gear. We always recommend using a paint suit, respirator mask and latex or nitrile gloves.

### Outfit/Applicators:



Fresh Air  
Respirator



Paint Suit



Nitrile gloves



Professional Paint Sprayer  
1.3-1.7mm / 0.05-0.06" nozzle



Paint Roller  
(Microfiber)



Respirator



Paint Brush  
(acrylic)

### Application information

The SI11/SI12/SI21/SI14/SI31 coatings can be applied directly or indirectly on all surfaces (porous and non-porous) such as concrete, steel, wood, glasfiber, acrylic, gypsum, painted or unpainted surfaces, indoors, or outdoors. The surface underneath will be superbly protected against erosion and corrosion and will stay cleaner longer. Cleaning becomes quicker, easier, and less expensive, as special cleaning agents are unnecessary.

### Preparation

Make sure the surface is free from any contamination and dirt. A zinc rich primer can be used for ferrous metals that are exposed to coastal and marine environments or in case of problems with the substrate.

**Warning the surface must be completely dry before application and must stay dry for 6 hours after application after application!**

### The 2-Component Permanent Coating System

Mix the can SI11B-SI12B-SI21B-SI31B with the can of SI11A-SI12A-SI21A-SI31A by pouring can B into can A, or measure **exactly by NET WEIGHT** in a ratio of 9:1 **by using a scale** and **mix very well**.

Mix SI14A2800 with SI14C0800 with by pouring can C into can A, or measure **exactly by NET WEIGHT** in a ratio of 7:2 **by using a scale** and **mix very well**, then add the entire content of SI14B0400 or measure **exactly by NET WEIGHT** in a ratio of 7:1 (compared to SI14A2800) **by using a scale** and **mix very well**. Carefully pour the mixed contents into a professional paint sprayer, and spray in thin layers until the surface reaches your desired thickness. Depending on the surface, material and structure, different application techniques can be used (such as paint rollers or brushes). Let the surface dry for 24 hours. It is touch-dry in 1 hours, after 4 hours, 85% cured, and the remaining 15% (transformation into ceramics) is fully cured after 7 days. Be aware that the mixed contents cannot be stored longer than 3 hours. If have orange peel you may wet /sand the surface wit P1500 and after P2000 and polish with One Step Polish till high shine. The surface can simply be maintained with a high pressure washer at 80 bar using our biologically degradable Reactivaing Shampoo. The surface can simply be maintained with a high pressure washer at 80 bar using our biologically degradable Reactivating Shampoo.

### Tool cleaning and Thinner solvent

The individual components, as well as the mixing system of the paint sprayer, can be diluted and cleaned using our solvent. All of our paints and coatings are ready to use, for certain spray applications, especially dark colors which require more color pigment than average, it may be necessary to use our SOLV thinner solvent to achieve optimal flowability.

## How to use our UVA Coating System:

These products can be stored for up to 24 months (*in a dry, temperature-stable dark environment*)

### Processing Temperature:

Ambient temperature: 41-86°F  
Avoid direct sunlight, Rain and /or high humidity.

### IMPORTANT:

Before you use a NANO-CERAMIC product, please make sure you wear suitable protection gear. We always recommend using a paint suit, respirator mask and latex or nitrile gloves.

### Outfit/Applicators:



Respirator



Paint Suit



Nitrile gloves



HVLP Paint Sprayer  
1.0-1.3mm / 0.03-0.05" nozzle



Microfiber Roller  
(6mm short nap)



Cotton Pads



Paint Brush  
(acrylic)

### Instructions for use:

Protect or Renew; Marble, Granite, Varnished wood, HPL, PVC or Vinyl laminate and Melamine. Creates an easy-to-clean, anti-scratch surface that is resistant to UV Discoloration, HF (Hydrofluoric Acid), Hydrochloric Acid, and Citric Acid.

Wipe Application; 1. Clean the surface 2. Sterilize the surface 3. Apply via the cotton pad an even layer 4. Let it cure.

Spray Application; Use an HVLP (High Volume Low Pressure) spray gun with 60-80% transfer efficiency. Fit the spray gun with a 1.0-1.3 mm fluid tip. Set air pressure to 20-30 psi.

### Preparation Steps:

1. Stir the coating thoroughly for 30 seconds before use.
2. Prior to application, strain the mixed coating through a suitable paint filter (e.g., 190-250 µm) to ensure a clean, defect-free spray.
3. Wash and decontaminate the surface.
4. Wet sand / scuff using 1500-2000 grit sandpaper.
5. Mask off any parts not to be coated.
6. Ensure environmental conditions are below 65% humidity.
7. Perform a final clean using 100% acetone.
8. Wipe with a tack cloth to remove any dust or lint.

### Application Procedure:

1. Spray a light, even coat. Allow a 5-minute flash-off time, or until outgassing stops.
2. Apply a second coat. Allow to flash off for at least 15 minutes, or until outgassing stops.
3. Unmask carefully before the coating fully cures.

### Curing:

Tough Dry 5min, Hard Dry 2 Hours, 85% Cured 12 Hours, 100% Cured 5 Days

Refer to the TDS/SDS for more information.



# NANO-CERAMIC®



WWW.NANO-CERAMIC.COM THE NEXT GENERATION COATINGS



## ***The Leader in Durability***

*Did you know that our Thin film Coatings are made from pure silica, which is one of the most common elements on Earth?*

**Dealer**