

NANO-CERAMIC®



WWW.NANO-CERAMIC.COM INDUSTRIAL PROTECTIVE COATINGS



Industrial Objects Permanent Coating System

What is NANO-CERAMIC UVA Topcoat?

NANO-CERAMIC® UVA Topcoat is an innovative low-VOC, non-PFAS, sprayable protective coating designed especially for the demanding conditions of trucks and buses. This self-leveling system forms an ultra-hard, glass-like hydrophobic barrier that delivers superior protection and a sleek, high-gloss finish.

Engineered for extreme durability, UVA Topcoat resists harsh weather, intense UV radiation, road salts, and aggressive chemicals commonly encountered in road transport. It is fully safe and compliant for use on passenger and cargo vehicles—including food-contact areas—ensuring both safety and performance.

Powered by cutting-edge nanotechnology, UVA Topcoat extends the service life of critical surfaces such as polyester, epoxy, polyurethane, acrylic resins, steel, aluminum, composites, and wood. It effectively prevents corrosion, surface degradation wear—making it the ideal all-in-one solution to protect exterior and interior surfaces.

Why UVA Topcoat is a Game-Changer in Protection?

For decades, protective coatings like epoxy, polyurethane (PU), and acrylic have been the industry standard. However, they all share a critical weakness—UV degradation. Prolonged exposure to sunlight causes these coatings to yellow, crack, and deteriorate, leading to costly maintenance and premature failures.

Superior Performance at the Lowest Cost.

UVA Topcoat isn't just another coating—it's a next-generation solution designed to simplify and reduce costs maintenance. By replacing complex, multi-layer systems with a single, high-performance layer, it streamlines your coating process.

Applied directly over existing automotive paints and materials, UVA Topcoat eliminates the need for expensive refinishing or additional topcoats, saving both time and money. Its advanced chemistry and ease of application make traditional coating systems obsolete for floors, pipelines, storage tanks, bridges and many more.

Whether protecting these surfaces, UVA Topcoat simplifies your workflow and maximizes value—demonstrating that outstanding durability and protection don't have to come with a premium price.


Where can UVA Topcoat be used?

UVA Topcoat is highly versatile and ideal for a wide range of industrial and factory applications:

- Exterior Structures – Facades, loading bays, storage tanks, and pipelines for long-term weather and UV protection
- Production Areas – Floors, walls, and machinery housings with chemical, abrasion, and impact resistance
- Storage & Logistics Zones – Racks, shelving, conveyor systems, and container exteriors for easy cleaning and durable finish
- Utility Equipment & Framework – Beams, supports, ducts, and enclosures with corrosion resistance against moisture and harsh environments

Compatible with both new installations and maintenance recoats, UVA Topcoat adapts to varied materials and demanding conditions typical in industrial operations.

How it Works

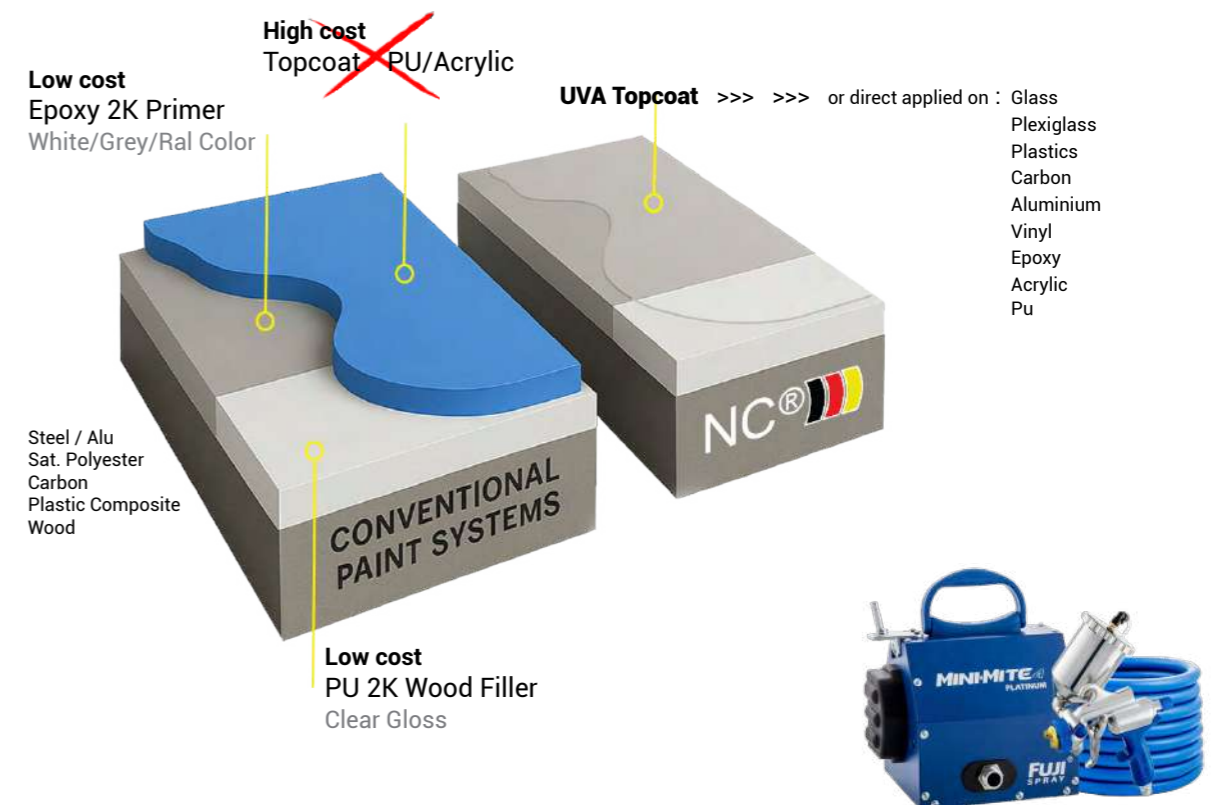

Freedom in Protection Years

Long-Lasting Protection, Layer by Layer
A single 6 µm (micron) layer applied using HVLP spray technology can provide up to 8 years of protection. Need more durability? Just add more layers—it's that simple.

Apply wet-on-wet: once the first coat flashes off (dry to the touch but still tacky), you can immediately apply the next. This method prevents trapped gases and creates a seamless, chemical-resistant film with hydrophobic properties—making surfaces easier to clean and maintain.



Coverage & Application Efficiency

UVA Topcoat is engineered for maximum efficiency with minimal material use—delivering high-performance protection at a fraction of the volume required by traditional coatings.

Recommended usage is approximately ±0.025 lbs/ft² per layer (by wipe or spray), resulting in a film thickness of around 6 microns, with one liter covering up to 800 ft²..

Color Tinting Option


For customized aesthetics, UVA Topcoat can be tinted using our colorants on pages 22–23. These high-performance, solvent-free pigments deliver long-lasting color stability and excellent UV resistance—ideal for exterior and interiors, areas where both protection and appearance are essential. Perfect for any visible surface requiring a durable, colored finish without compromising the coating's hydrophobic and chemical-resistant properties.

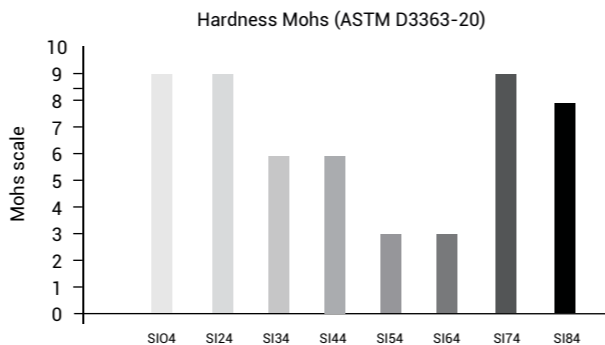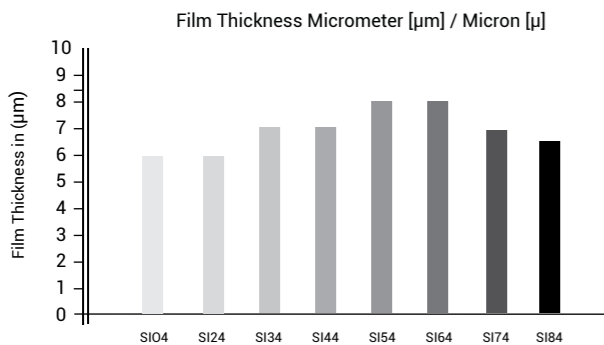

Quality Comparison of paints technologies

In case written in bold font it means existing shortcomings in quality.

| Characteristics | Acrylic Latex walls ceilings | Acrylic walls floors | Epoxy floors | Polyurethane waterproofing | UVA Topc all surfaces |
|-------------------------------|---------------------------------|-------------------------|-----------------|-------------------------------|--------------------------|
| Primer | Yes | Yes | Yes | Yes | No |
| Adhesion Strength | Poor | Poor | Poor | Poor | Excellent |
| Cross Cut Test | Poor | Poor | Good | Poor | Excellent |
| Abrasion Resistance | Poor | Poor | Average | Poor | Excellent |
| UV Radiation Resistance | Average | Average | Poor | Good | Excellent |
| Artificial Atmospheric Agents | Poor | Poor | Good | Good | Excellent |
| Colour Retention | Average | Average | Poor | Poor | Excellent |
| Gloss Retention | Poor | Poor | Poor | Poor | Excellent |
| Chemical Resistance | Good | Good | Good | Poor | Excellent |
| Severe Chemical Attack | Poor | Poor | Average | Poor | Excellent |
| Temperature Resistance | 140°F | 196°F | 350°F | 505°F | 550°F |
| Thermal Shock Resistance | Good | Good | Poor | Good | Excellent |
| Carbon Dioxide Permeability | Poor | Poor | Good | Poor | Excellent |
| Permeability water vapour | Average | Average | Good | Average | Excellent |
| Water Absorption Rate | 5-15% | 1% | 2% | 3% | 0% |
| Aging at 70°C | Poor | Poor | Good | Average | Excellent |
| Adhesion Strenght Pull-off | Poor | Average | Good | Poor | Excellent |
| Impact Resistance | Poor | Average | Good | Poor | Excellent |
| Anti-Graffiti | No | No | No | No | Yes |
| Anti-Termite (Wood) | No | No | No | No | Yes |
| Hydrophobic Self Cleaning | No | No | No | No | Yes |
| Easy to Clean | No | No | No | No | Yes |
| Total Solar Reflectance (TSR) | 60 (white) | 60 (white) | 60 (white) | 60 (white) | 88 (white) |
| Expected Lifetime in Years | <7 | <7 | <5-15 | <5-15 | 8/16/24 |

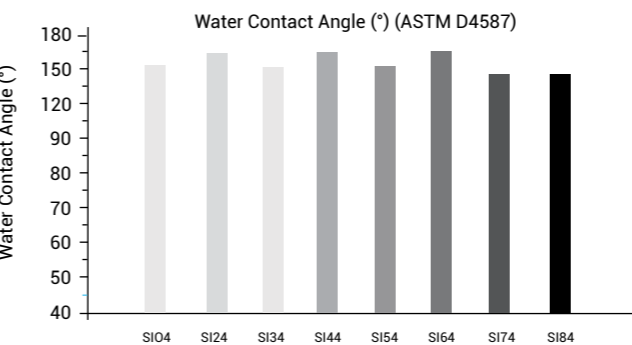



SIO4

1-Component (2K)

Topcoat Transparent for glossy surfaces



Product ID : SIO41LUVA 32 oz / 2.03 lbs SIO405UVA 16 oz / 1 lbs
Consumption : 3 layers +/- 0.075 lbs/ft² - 0.12 oz/ft² 18 micron = 200 ft²
Reachable area : 2 layers +/- 0.050 lbs/ft² - 0.08 oz/ft² 12 micron = 400 ft²
 : 1 layer +/- 0.025 lbs/ft² - 0.04 oz/ft² 6 micron = 800 ft²
Hardness/Cupping : H9 / Flexibility ISO 1520 >21mm
Used for : Facades, floors, storage tanks, pipelines dll.
Application field : Buildings, factories, offshore structures, bridges, dll.

SIO4 is an incredibly strong 1-component paint system which forms a durable matrix of molecular bonds (transformation to ceramic) resulting in permanent protection of the surface.

Three simple steps: Clean, Dry, and Apply.

- Easily repels water, dirt, dust, and pollutants.
- This coating is permanent hydrophobic.
- Restores damaged finishes and reduces cleaning intervals.
- Resistant to all kinds of chemicals and UV radiation.
- Superior anti-pollution and anti-corrosion properties.
- This coating can withstand temperatures of 550°F.

Expected life duration 4-16 or 24 Years (layer thickness)



**Easy to apply
Repaintable**



**Cut maintenance
costs**



**Anti-water spot
Anti-corrosion**



**Permanent
hydrophobic**



**Self-cleaning
Cleaner for longer**



Anti-scratch



**Impact Resistance
30"-2lbs**



**Protects your
investment**

How to use: Page 28



SI24

1-Component (1K)

Topcoat Transparent for matte surfaces



Product ID : SI241LUVA 32 oz / 2.13 lbs SI2405UVA 16 oz / 1.05 lbs
Consumption : 3 layers +/- 0.075 lbs/ft² - 0.12 oz/ft² 18 micron = 200 ft²
Reachable area : 2 layers +/- 0.050 lbs/ft² - 0.08 oz/ft² 12 micron = 400 ft²
 : 1 layer +/- 0.025 lbs/ft² - 0.04 oz/ft² 6 micron = 800 ft²
Hardness/Cupping : H9 / Flexibility ISO 1520 >21mm
Used for : Facades, floors, storage tanks, pipelines dll.
Application field : Buildings, factories, offshore structures, bridges, dll.

SI04 is an incredibly strong 1-component paint system which forms a durable matrix of molecular bonds (transformation to ceramic) resulting in permanent protection of the surface.

Three simple steps: Clean, Dry, and Apply.

- Easily repels water, dirt, dust, and pollutants.
- This coating is permanent hydrophobic.
- Restores damaged finishes and reduces cleaning intervals.
- Resistant to all kinds of chemicals and UV radiation.
- Superior anti-pollution and anti-corrosion properties.
- This coating can withstand temperatures of 550°F

Expected life duration 4-16 or 24 Years (layer thickness)



**Easy to apply
Repaintable**



**Cut maintenance
costs**



**Anti-water spot
Anti-corrosion**



**Permanent
hydrophobic**



**Self-cleaning
cleaner for longer**



Anti-scratch



**Impact Resistance
30"-2lbs**



**Protects your
investment**

How to use: Page 28



Multi-Grade Color Protection — Super Transparent

For boats where weight, speed, and durability matter, our advanced hybrid coating system offers a breakthrough: vibrant transparent tints or metallic finishes without sacrificing performance. By blending NANO-CERAMIC® Super Transparent Colorants into our UVA Topcoat, you get:

Ultra-thin coating (<15 microns) = minimal weight
 H9 surface hardness = max scratch resistance
 Hydrophobic & anti-fouling = fast cleaning, less drag
 UV & salt resistant = marine-grade longevity
 Clear or colored: keep visibility through glass or plexi
 Optional metallic effect for custom marine finishes

Perfect for:

Factory safety paths & door panels
 Interior partitions & wall panels
 Equipment housings & control panels
 Stainless/aluminum rails



TR.OXIDE YELLOW A-2R 130
 Masstone
 Tint
 77492-1 3.2 oz



TRANSOXIDE RED A-G 130
 Masstone
 Tint
 77491-1 3.2 oz



YELLOW A-N4G 100-ST
 Masstone
 Tint
 279376 3.2 oz



RED A-P2Y 100-ST
 Masstone
 Tint
 289404 3.2 oz



PINK A-EB 100-ST
 Masstone
 Tint
 287516 3.2 oz



BLUE A-BTR 100-ST
 Masstone
 Tint
 290247 3.2 oz



BLUE A-BTG 100-ST
 Masstone
 Tint
 275536 3.2 oz



GREEN A-GBX 100-ST
 Masstone
 Tint
 323291 3.2 oz



BLACK A-NB 100-ST
 Masstone
 Tint
 289518 3.2 oz



BLACK A-NY 100-ST
 Masstone
 Tint
 272060 3.2 oz



YELLOW A-F2G 100
 Masstone
 Tint
 11785 3.2 oz



RED A-D3GD 130
 Masstone
 Tint
 56110 3.2 oz



BLUE A-BG 100
 Masstone
 Tint
 74160 3.2 oz



OXIDE YELLOW A-CR 100
 Masstone
 Tint
 77310 3.2 oz



YELLOW A-H3G 100
 Masstone
 Tint
 11781 3.2 oz



PINK A-E 130
 Masstone
 Tint
 73915 3.2 oz



GREEN A-GNX 130
 Masstone
 Tint
 74260 3.2 oz



OXIDE YELLOW A-R 100
 Masstone
 Tint
 77492 3.2 oz



YELLOW A-HRD 100
 Masstone
 Tint
 21108 3.2 oz



RED VIOLET A-ER 130
 Masstone
 Tint
 73900 3.2 oz



BLACK A-N 100
 Masstone
 Tint
 77266 3.2 oz



OXIDE RED A-B 100
 Masstone
 Tint
 77491 3.2 oz



ORANGE A-HLD 100
 Masstone
 Tint
 11780 3.2 oz



VIOLET A-RL 100
 Masstone
 Tint
 51319 3.2 oz



OXIDE YELLOW A-BV 100
 Masstone
 Tint
 771740 3.2 oz



WHITE A-R 100
 Masstone
 Tint
 77891 3.2 oz

Lightweight, Ultra-Hard, Built for Speed. Opaque Ral

This coating system enhances both performance and aesthetics — making painted surfaces longer lasting, cleaner, safer and more refined.

What makes NANO-CERAMIC Permanent Coating System so durable?

NANO-CERAMIC permanent coating system is the latest generation of protective coating which transforms paint into a hard ceramic, providing superior scratch resistance and near-permanent protection for all exterior or interior surfaces.


NANO-CERAMIC permanent coating system is 600°F resistant and more than 4 times stronger than traditional acrylic based paint finishes, and is effectively preventing damage that would otherwise affect the appearance and integrity of the original surface.

Zero Maintenance for decades to come!

Our NANO-CERAMIC permanent coating system is rigorously tested by an independent testing laboratory according to the European standard for outdoor paints (EN 1504-2) as per test report page 19 as here below.

Can NANO-CERAMIC Permanent Coating System be applied on any surface?


The NANO-CERAMIC permanent coating system can be applied directly or indirectly on all kinds of interior and /or exterior surfaces (absorbing and non-absorbing), such as concrete, steel, wood, acrylic, gypsum and many more.

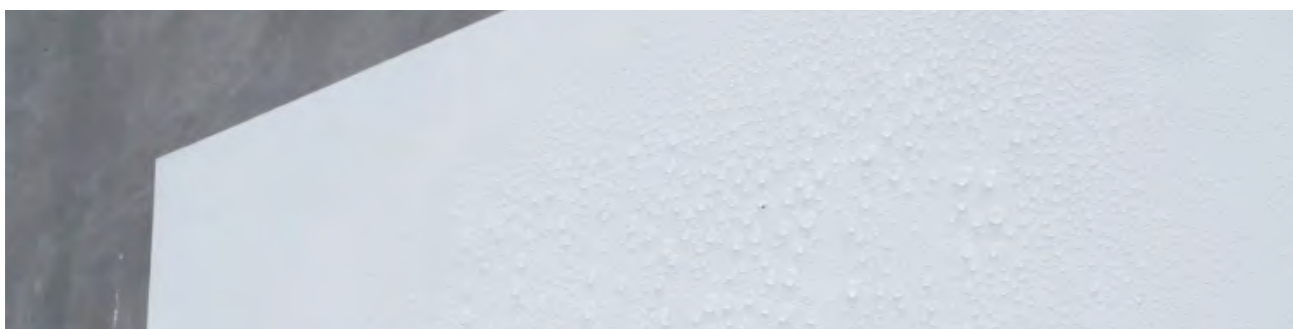

Is NANO-CERAMIC Permanent Coating System self-cleaning?

NANO-CERAMIC permanent coating system provides a permanent hydrophobic surface that is self cleaning, easier to clean and stays cleaner longer as water and dirt can not penetrate the ceramic layer. NANO-CERAMIC permanent coating system is resistant to water vapor and water absorption.


Cross Sections of NC® Coating Systems

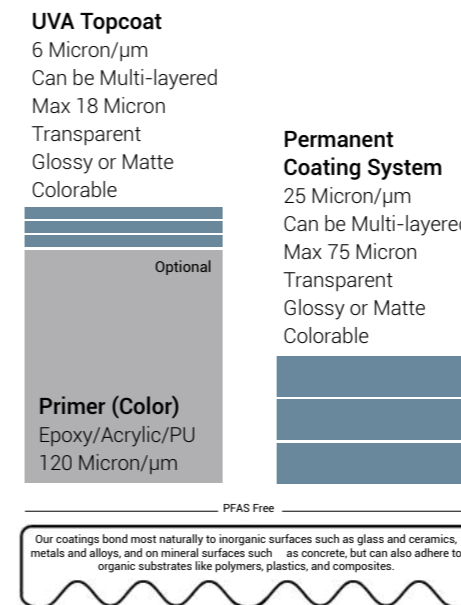

Other paints are simply not suitable for longterm harsh outdoor environments.

In order to avoid poorly maintained properties (concrete rot, chipped and weathered paint, etc) for the next decades, our Permanent Coating System is simply the best solution to keep the value of your investment in place.

Superior in Color & Gloss Retention

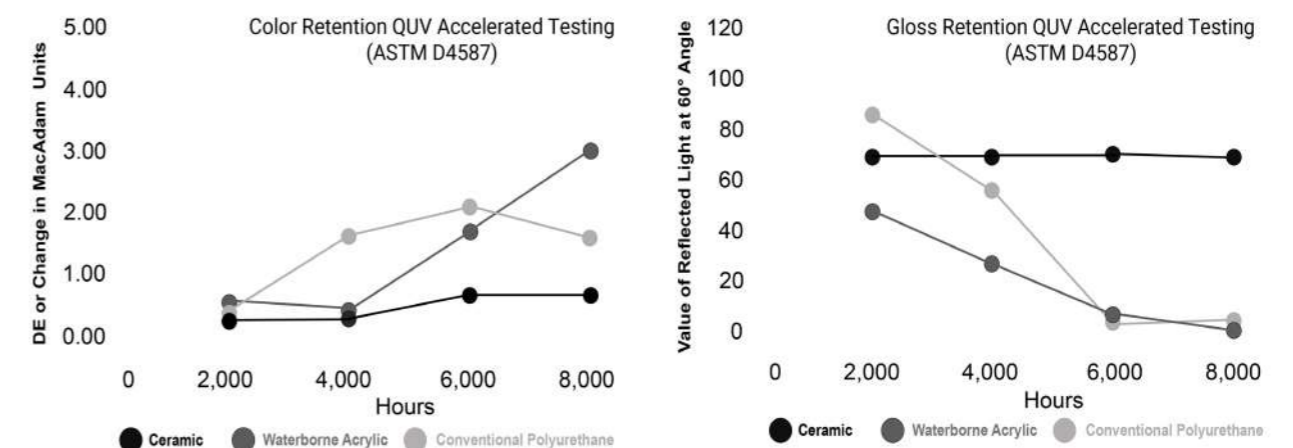

A special selection of high grade tinting chemicals computerized dispersed in a superior ceramic resin.


Conventional gelcoats are a mixture with Epoxy or Polyurethane resins, of which the quality of resin and pigments are the most important factor in the ultimate strength. Most have a lifespan of 15 years, with hardness, color and gloss retention (sun fading) and manual mixing towards consistent quality being the most common problems in keeping the desired object at an aesthetically pleasing level.

Quality Comparison of paints technologies

In case written in bold font it means existing shortcomings in quality.

| Characteristics | Acrylic Latex walls ceilings | Acrylic walls floors | Epoxy floors | Polyurethane waterproofing | CERAMIC® all surfaces |
|-------------------------------|---------------------------------|-------------------------|-----------------|-------------------------------|--------------------------|
| Primer | Yes | Yes | Yes | Yes | No |
| Adhesion Strength | Poor | Poor | Poor | Poor | Excellent |
| Cross Cut Test | Poor | Poor | Good | Poor | Excellent |
| Abrasion Resistance | Poor | Poor | Average | Poor | Excellent |
| UV Radiation Resistance | Average | Average | Poor | Good | Excellent |
| Artificial Atmospheric Agents | Poor | Poor | Good | Good | Excellent |
| Colour Retention | Average | Average | Poor | Poor | Excellent |
| Gloss Retention | Poor | Poor | Poor | Poor | Excellent |
| Chemical Resistance | Good | Good | Good | Poor | Excellent |
| Severe Chemical Attack | Poor | Poor | Average | Poor | Excellent |
| Temperature Resistance | 140°F | 196°F | 350°F | 505°F | 600°F |
| Thermal Shock Resistance | Good | Good | Poor | Good | Excellent |
| Carbon Dioxide Permeability | Poor | Poor | Good | Poor | Excellent |
| Permeability water vapour | Average | Average | Good | Average | Excellent |
| Water Absorption Rate | 5-15% | 1% | 2% | 3% | 0% |
| Aging at 158°F | Poor | Poor | Good | Average | Excellent |
| Adhesion Strenght Pull-off | Poor | Average | Good | Poor | Excellent |
| Impact Resistance | Poor | Average | Good | Poor | Excellent |
| Anti-Graffiti | No | No | No | No | Yes |
| Anti-Termite (Wood) | No | No | No | No | Yes |
| Hydrophobic Self Cleaning | No | No | No | No | Yes |
| Easy to Clean | No | No | No | No | Yes |
| Total Solar Reflectance (TSR) | 60 (white) | 60 (white) | 60 (white) | 60 (white) | 88 (white) |
| Expected Lifetime in Years | <7 | <7 | <5-15 | <5-15 | 15-30+ |

Permanent Coating Protection Plan for Industrial Objects

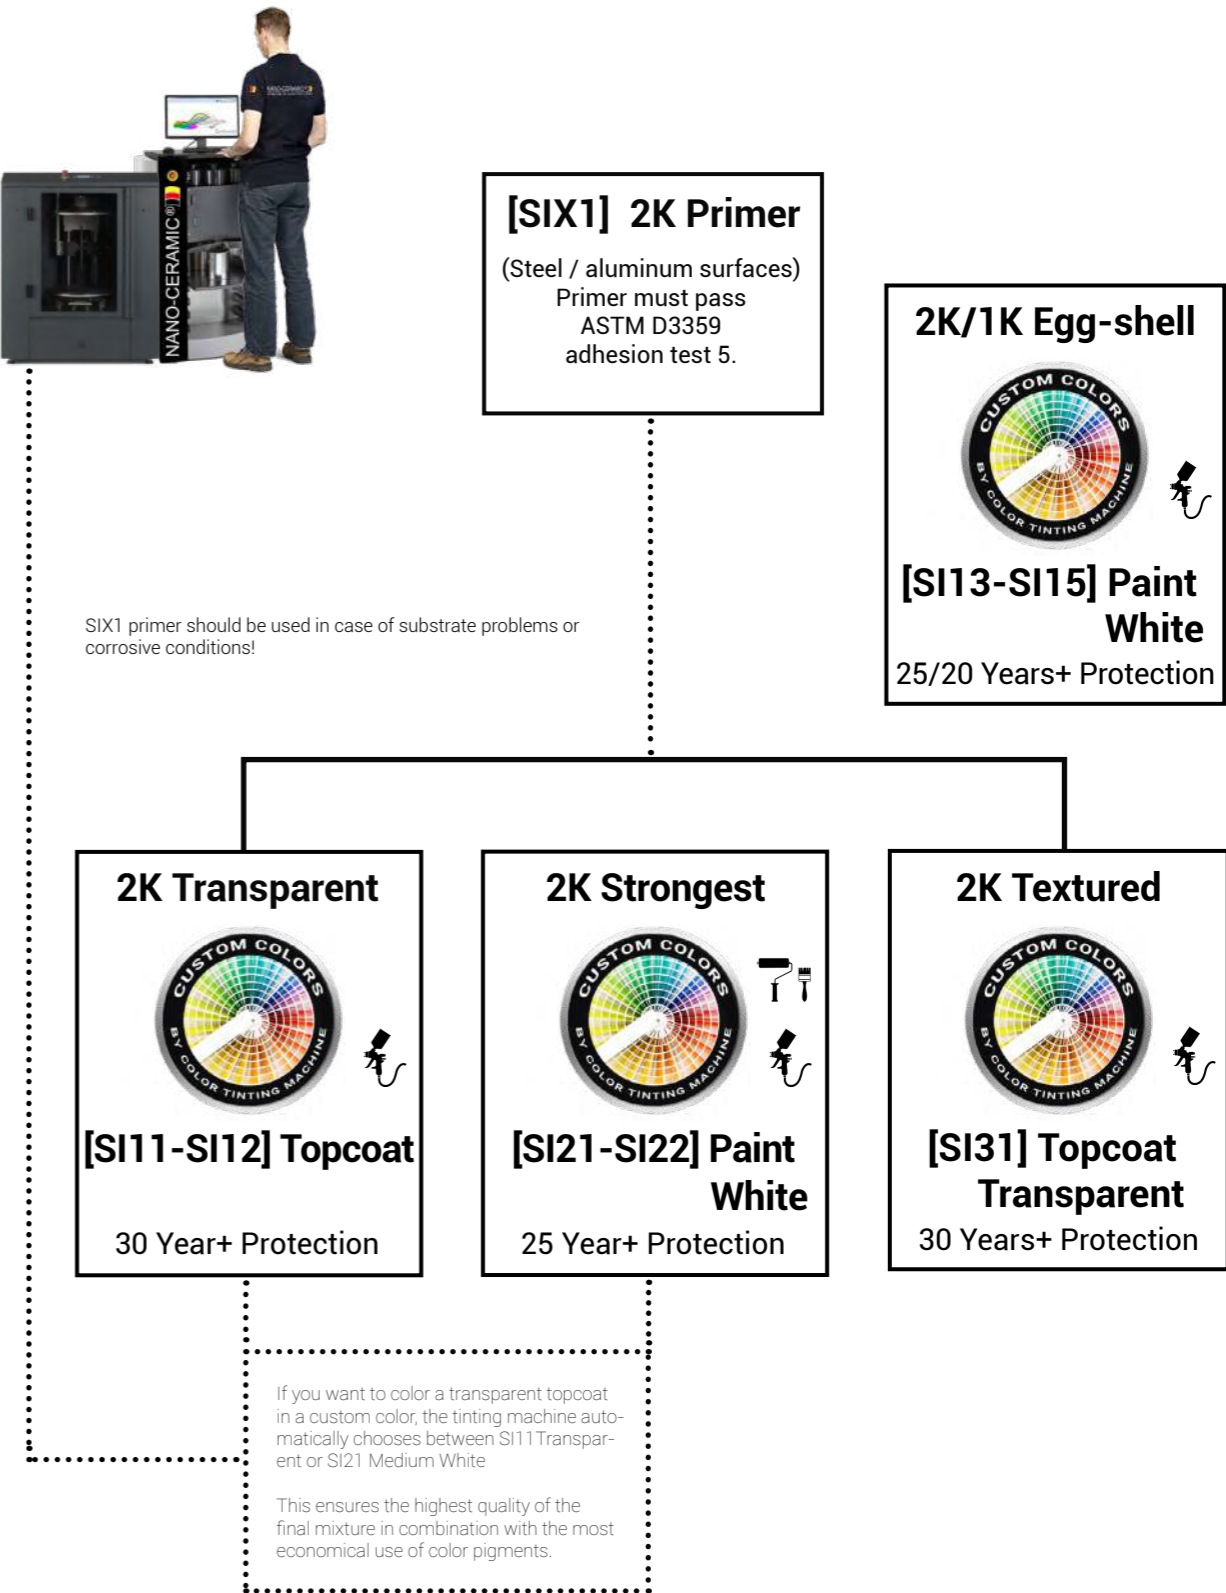



SI11/SI12 2-Component (2K)

Topcoat Transparent for glossy and matt surfaces

| | |
|--------------------------|---|
| Product ID | : SI112000 67 oz / 4.2 lbs SI122000 67 oz / 4.4 lbs |
| Consumption | : 3 layers 0.06 lbs/ft ² - 0.96 oz/ ft ² = 3 mil / 70 ft ² |
| Reachable area | : 2 layers 0.04 lbs/ft ² - 0.64 oz/ ft ² = 2 mil /140 ft ² : 1 layer 0.02 lbs/ft ² - 0.32 oz/ ft ² = 1 mil / 210ft ² |
| Hardness | : H9 |
| Used for | : Gelcoat, fiberglass, steel, aluminum, plastics, wood, adiater tubes, walls, floors practically any surface. |
| Application field | : Buildings, factories, offshore structures, bridges, dll. |

SI11/SI12 is an incredibly strong 2-component paint system which forms a durable matrix of molecular bonds (transformation to ceramic) resulting in permanent protection of the surface.

Three simple steps: Clean, Dry, and Apply.

- Easily repels water, dirt, dust, and pollutants.
- This coating is permanent hydrophobic.
- Restores damaged finishes and reduces cleaning intervals.
- Resistant to all kinds of chemicals and UV radiation.
- Superior anti-pollution and anti-corrosion properties.
- This coating can withstand temperatures of 300°C.

Expected Life Duration up to 30 years+



How to use: Page 29

- Easy to apply Repaintable**
- Cut maintenance costs**
- Anti-water spot Anti-corrossion**
- Permanent hydrophobic**
- Self-cleaning stays cleaner longer**
- Impact Resistance 1kg / 2lbs**
- Thermal Shock-Resistant**
- Protects your investment**



SI21/SI22 2-Component (2K)

The Strongest White Paint for glossy and matt surfaces

| | |
|--------------------------|---|
| Product ID | : SI212000 67 oz / 5.3 lbs SI222000 67 oz / 5.5 lbs |
| Consumption | : 3 layers 0.044 lbs/ft ² - 0.56 oz/ ft ² = 3 mil /120 ft ² |
| Reachable area | : 2 layers 0.030 lbs/ft ² - 0.37 oz/ ft ² = 2 mil /160 ft ² : 1 layer 0.014 lbs/ft ² - 0.19 oz/ ft ² = 1 mil /240 ft ² |
| Hardness | : H8 |
| Used for | : Gelcoat, fiberglass, steel, aluminum, plastics, wood, adiater tubes, walls, floors practically any surface. |
| Application field | : Buildings, factories, offshore structures, bridges, dll. |

SI21/SI22 is a medium white 2-component paint that binds molecules and (conversion to ceramic) provides permanent protection on applied surfaces.

Three simple steps: Clean, Dry, and Apply.

- Easily repels water, dirt, dust, and pollutants.
- This coating does not absorb any water
- Resistant to all kinds of chemicals and UV radiation.
- This coating can withstand temperatures of 300°C

Expected Life Duration up to 25 year+



How to use: Page 29

- Easy to apply Repaintable**
- Cut maintenance costs**
- Anti-water spot Anti-corrossion**
- Permanent hydrophobic**
- Self-cleaning stays cleaner longer**
- Impact Resistance 1kg / 2lbs**
- Thermal Shock-Resistant**
- Protects your investment**



APPLY
VIDEO
SCAN
QR CODE



SI31_{2-Component (2K)}

Textured Transparent Semi Gloss antislip - high impact resistant



How to use: Page 29

| | |
|-------------------------|--|
| Product ID | : SI312000 67 oz / 4.6 lbs |
| Consumption | : 3 layers 0.050 lbs/ft ² - 0.76 oz/ ft ² = 3 mil / 90ft ² |
| Reachable area | : 2 layers 0.033 lbs/ft ² - 0.51 oz/ ft ² = 2 mil / 180ft ² : 1 layer 0.017lbs/ft ² - 0.25 oz/ ft ² = 1 mil / 270ft ² |
| Hardness | : H9 |
| Used on | : Gelcoat, fiberglass, steel, aluminium, : plastics, wood, virtually any surface. |
| Application area | : Buildings, factories, offshore structures, bridges, dll. |

SI31 is a clear solvent-based ceramic coating, linked with a ceramic activator, available in semi-gloss and includes sprayable nano particles. Known for its exceptional durability, this coating easily applies to any organic surface without needing a primer. Its textured design makes it perfect for anti-slip needs.

- Easily repels water, dirt, dust, and pollutants.
- This coating has an outstanding hydrophobic effect.
- Resistant to all kinds of chemicals and UV radiation.
- This coating can withstand temperatures of 600°F.
- Zero absorbtion, waterproof, insulation and heat rejecting

Expected Life Duration up to 30 years+

- Easy to apply**
Repaintable
- Cut maintenance**
- Anti-water spot**
Anti-corrosion
- Permanent hydrophobic**
- Self-cleaning**
stays cleaner longer
- Anti-scratch**
- Visibility safety**
- Protects your investment**
- Impact Resistance**
2lbs/2.6ft



APPLY
VIDEO
SCAN
QR CODE



SI13_(2K) / SI15_(1K)

The Coolest White Paint for egg-shell surfaces



| | |
|--------------------------|---|
| Product ID | : SI132000 67 oz / 7.3 lbs SI152000 67 oz / 6.6 lbs |
| Consumption | : 2 layers 0.050 lbs/ft ² - 0.48 oz/ ft ² = 3.5 mil / 140 ft ² |
| Reachable area | : 1 layers 0.025 lbs/ft ² - 0.24 oz/ ft ² = 1.8 mil / 280 ft ² |
| Hardness | : H7 |
| Used for | : Concrete, steel, wood, acrylic, gypsum |
| Application field | : Buildings, factories, offshore structures, bridges, dll. |


SI13/SI15 is an incredibly strong 2-component eggshell paint system which forms a durable matrix of molecular bonds (transformation to ceramic) resulting in permanent protection of the surface.

Three simple steps: Clean, Dry, and Apply.

- Easily repels water, dirt, dust, and pollutants.
- This coating does not absorb any water
- Resistant to all kinds of chemicals and UV radiation.
- This coating can withstand temperatures of 300°C

Expected Life Duration up to 25 year+ or 20 year+

How to use: Page 29



- Easy to apply**
Repaintable
- Cut maintenance costs**
- Anti-water spot**
Anti-corrosion
- Permanent hydrophobic**
- Self-cleaning**
stays cleaner longer
- Impact Resistance**
1kg / 2lbs
- Thermal Shock-Resistant**
- Protects your investment**

Color mixing has never been so easy!!!

X- SMART is the modular version of the acclaimed dispenser series, extremely cost-effective and easy to operate, with a low maintenance

This color mixer has a robust and tubeless design, built with a patented pump technology (to reduce waste) and identical features, making it a highly advanced dispenser, ideally suited to reduced capacity.



Prisma-RT is a cloud-based innovative mobile color application compatible with the X-SMART dispenser. It brings the best of wireless technology without the associated investment costs in hardware. Customers do not have to provide computers and other accessories or set up servers, eliminating the need for complicated and time-consuming installation and configuration. This smart Prisma-RT device helps to fix prices and taxes and can print labels via Wi-Fi.



X-SMART
Stabilizer plates

16 High Grade Coloring chemicals



Titanium White
Masstone
Tint
844-0061 1.05 gal



Quinacridone Red
Masstone
Tint
844-0451 32 oz



Scarlet Red
Masstone
Tint
844-0526 32 oz



Lead Free Orange
Masstone
Tint
844-0982 32 oz



Trans Red Oxide
Masstone
Tint
844-1054 32 oz



Red Oxide
Masstone
Tint
844-1063 32 oz



Burnt Umber
Masstone
Tint
844-1352 32 oz



Trans Yellow Oxide
Masstone
Tint
844-1852 32 oz



Yellow Oxide
Masstone
Tint
844-1863 32 oz



Lead Free Med Yellow
Masstone
Tint
844-2555 32 oz



Yellow
Masstone
Tint
844-2826 32 oz



Organic Yellow
Masstone
Tint
844-2852 32 oz



PHTHALO Green
Masstone
Tint
844-5558 32 oz



Quinacridone Violet
Masstone
Tint
844-9451 32 oz



Lamp Black
Masstone
Tint
844-9955 32 oz



PHTHALO BLUE
Masstone
Tint
844-7262 32 oz

Color card

Residential

SI13 White Egg-Shell (Flat Finish) 15/25 (20/60°)
SI15 White Egg Shell (Flat Finish) 18/28 (20/60°)
SI21 White Gloss 49/77 (20/60°)
SI22 White Satin 33/59 (20/60°)

SI41 Textured White Semi Gloss 41/69 (20/60°)
SI42 Textured White Matte 11/21 (20/60°)

Original

RAL 9018

RAL 3015

Cool white

RAL 9001

Light pink

Papyrus white

RAL 9022

Pastel blue

Cream white

RAL 9002

Pearl light grey

Pastel blue

Grey white

RAL 9023

Pearl dark grey

Pastell violet

Signal white

RAL 1000

Light green

Signal black

RAL 1001

Squirrel grey

Jet black

RAL 1002

Pearl gold

White aluminium

RAL 1011

Pearl copper

Grey aluminium

RAL 1013

Pearl white

Pure white

RAL 1014

Pearl gentian blue

Graphite black

RAL 1015

Light ivory

Traffic white

RAL 9017

Traffic black

Mahogany braun

Wood

SI11 Transparent Gloss 51/78 (20/60°)
SI12 Transparent Matte 11/21 (20/60°)

SI11 Transparent

SI11 Light

SI11 Nut

SI11 Colonial

Industrial

SI11 Transparent Gloss 51/78 (20/60°)
SI21 White Gloss 49/77 (20/60°)
SI22 White Satin 33/59 (20/60°)

Transparent

RAL 1026

Lumious yellow

RAL 3020

Traffic red

RAL 9005

Jet black

RAL 1004

Golden yellow [Cat]

RAL 6002

Leaf green [J.D Deere]

RAL 7035

Light grey

RAL 7011

Dark grey

RAL 7001

Silver grey

RAL 8032

Signal brown

RAL 8025

Pale brown

Other colors need minimal 220 lbs

Marine

SI12 Transparent Matte 11/21 (20/60°)
SI41 Textured White Semi Gloss 41/69 (20/60°)
SI42 Textured White Matte 11/21 (20/60°)

Original

Cool white

RAL 9010

Pure white

RAL 9001

Cream white

RAL 9023

Distant blue

RAL 1023

Traffic yellow

RAL 7001

Silver gray

RAL 1015

Light Ivory

RAL 9016

Pure white

RAL 9001

Cream

RAL 1001

Beige

RAL 1020

Olive yellow

Military

SI31 Textured Transparent Semi Gloss 41/69 (20/60°)
SI33 Textured Black Semi Gloss 41/69 (20/60°)

Original

Fire red

RAL 3000

Burgundy

RAL 7036

Platinum

RAL 9005

Jet black

RAL 9005

Jet Black

RAL 9019

Turquoise bleu

RAL 6027

Light green

RAL 9000

Violet blue

RAL 9012

Light blue

RAL 9002

Ultramarine blue

RAL 9013

Sapphire blue

RAL 5005

Signal blue

Antifouling

SI14 Color 31/41 (20/60°)

Transparent

RAL 9005

Jet Black

RAL 3001

Signal Red

RAL 5002

Ultra marine blue

RAL 7004

Signal Grey



SIX1

2-Component (2K)

Primer Epoxy Polyamide

heavy duty - anti-corrosion

Product ID : SIX11250-WH/GR 42 oz / 3.2 lbs SIX15000-WH/GR 1.32 gal / 12.8 lbs
Consumption : 2 layers +/- 0.53 lbs/ft² - 0.7 oz/ft² 80 micron = 50 ft²
Reachable area : 1 layer +/- 0.26 lbs/ft² - 0.4 oz/ft² 40 micron = 100 ft²
Hardness : H5
Colors : White, Grey or RAL (RAL Minimum Order 250 pcs 1.32 gal)
Used on : Concrete, Steel, Aluminium, Fiberglass and other organic surfaces

Application area : Buildings, marine, airports, offshore structures, bridges

SIX1 is a solvent based epoxy polyamide primer. This primer is used for corrosion protection on concrete, stainless, galvanized, carbon and alloy steel, aluminum in corrosive conditions and has excellent adhesion to all organic substrates and to all of our ceramic topcoats. The primer can be applied at a relative humidity of 40-80% and can be painted over within 8 hours 85°F, 1 hours 140°F.



Fast Repaintable



Excellent adhesion



Heavy Duty Primer - Smooth Surfacer

SIX2

2-Component (2K)

Primer Surfacer Acrylic Alkyd

smooth - surface modifier

Product ID : SIX21250-WH/GR 42 oz / 3.2 lbs SIX25000-WH/GR 1.32 gal / 12.8 lbs
Consumption : 2 layers +/- 0.44 lbs/ft² - 0.7oz/ft² 60 micron = 60ft²
Reachable area : 1 layer +/- 0.22 lbs/ft² - 0.4oz/ft² 30 micron = 120ft²
Hardness : H3
Colors : White or Grey
Used on : Steel, aluminium, wood, fiberglass, and old paint systems.
Application area : Buildings, marine, airports, bridges



Fast Repaintable



Excellent adhesion



VOC Free

SIX2 High-quality 2K surfacer (two-component basecoat) for auto-refinish, marine, and industrial coating applications where a smooth surface is required. The primer has excellent adhesion to all organic substrates and to all of our ceramic topcoats. The primer can be applied at a relative humidity of 30-80% and can be painted over within 4 hours 85°F, 1 hours 140°F.



SIX3

2-Component (2K)

Primer PU Wood Filler

surface modifier - absorption reducer

| | |
|-------------------------|--|
| Product ID | : SIX31500 51 oz / 3.3 lbs |
| Consumption | : 2 layers +/- 0.40 lbs/ft ² - 0.6 oz/ft ² 60 micron = 80ft ² |
| Reachable area | : 1 layer +/- 0.20 lbs/ft ² - 0.3 oz/ft ² 30 micron = 120ft ² |
| Hardness | : H4 |
| Used on | : Steel, Aluminium and other organic surfaces |
| Application area | : Buildings, marine, airports, offshore structures, bridges |



Fast Repaintable



Excellent adhesion

SIX3 is a solvent borne transparent wood filler. This primer is used as surface modification for, wood or natural stone to reduce capillary absorption and has an excellent adhesion to all organic substrates and towards one of our ceramic top coats. The primer can be applied at a relative humidity of 40-80%.



Wood or Natural Stone - Filler

SIX4

1-Component (1K)

Primer Acrylic Waterbased

all surfaces modifier

| | |
|-------------------------|---|
| Product ID | : SIX41000-WH/GR 32 oz / 2.65 lbs SIX44000-WH/GR 1 gal / 10.6 lbs |
| Consumption | : 2 layers +/- 0.53 lbs/ft ² - 0.7 oz/ft ² 80 micron = 50 ft ² |
| Reachable area | : 1 layer +/- 0.26 lbs/ft ² - 0.4 oz/ft ² 40 micron = 100 ft ² |
| Hardness | : H3 |
| Colors | : White, Grey or RAL (RAL Minimum Order 250 pcs 1 gal) |
| Used on | : Concrete, wood, drywalls and old waterbased paints |
| Application area | : Buildings, walls and ceilings indoor or outdoor |



Fast Repaintable



Excellent adhesion



VOC Free

SIX4 Acrylic Water-Based Primer is a premium, all-purpose primer-sealer with excellent adhesion, stain-blocking, and hiding power. Ideal for both interior and exterior surfaces, it bonds to glossy surfaces without sanding, effectively blocks stains, and provides a smooth foundation for any solvent-based or water-based topcoat.



SIX5

2-Component (2K)

Putty Polyester

ultra smooth - sandable

Product ID : SIX51000-WH/GR 2.2 lbs
Colors : White, Grey
Used on : Metal, wood, fiberglass, concrete, plastics
Application area : Transportation.

SIX5 is a High quality 2 (two) component Epoxy base putty for auto-refinish, marine and industrial coating applications.



Fast Repaintable



Excellent adhesion



SOLV

Thinner solvent

for all types of our ceramic paint & coating

Product ID : SOLV0400 14 oz / 0.8 lbs SOLV2000 64 oz / 3.9 lbs SOLV5000 1.32 gal / 9.7 lbs

All our paints and coatings are ready to use, for certain spray applications, especially dark colors who require more than average color pigments, it may be necessary to use a little thinner solvent to achieve optimum flowability.



RETA/ACCL

Retarder
Accelerator

slow down flash time or speed up curing

Product ID : RETA0400 14 oz / 0.85 lbs ACCL0200 7 oz / 0.4 lbs

If your application needs a longer flash time (for example, in hot temperatures) to build up the layer with a second or third coat, you can add the RETA Retarder. If you want to speed up the curing process, you can add the ACCL Accelerator. It can reduce curing time by 30–70% compared to uncatalyzed systems, and full hardness can develop 1.5–2× faster.



Scan QR Code for TDS and SDS

NANO-CERAMIC®
WWW.NANO-CERAMIC.COM THE NEXT GENERATION COATINGS

Instructions for use:
Make sure the surface is free from contamination and dirt.
A zinc-rich primer can be used in case of problems with the adhesion of the ceramic coating. The primer should pass the ASTM D3359 adhesion test 5.
Mix: SIX5A:5000 (Coating with SIX5B:200 (Activator), or mix in an exact ratio 5:1 NET WEIGHT using a scale. The surface must be thoroughly pre-treated and degreased. Apply the base mixture a thickness of approx. 15-20 microns (2-3 mils) and drying. Thickness to be determined by surface porosity.
Let the solvent dry for 24 hours. It is ready to use 1 hour after 24 hours 85% cured and the remaining 15% transformation into ceramic is fully cured after 7 days. Be aware that the mixed content cannot be stored longer than 3 hours.
75-85 minutes (2-3 mils) covers 10-15 m² (10-15 sqm)
Content: 1.8L / 60oz (NET WT: 1.73 kg / 3.8 lbs)

2K CERAMIC COATING
Super Durable Utilizes Nano-Technology
UV / Chemical / 300°C / 600°F Resistant

Perfect adhesion on:
Fiberglass, Epoxy
Aluminum, Steel
Concrete, Stone,
Wood, Acrylic, Copper.
Content:
Epoxy Resin, PTFE
Additive, Diisocyanate Acid
Finish: Gloss
Shade: S1176 (20-85°)

WARNINGS: FLAMMABLE - LIQUID VAPOR AND SPRAY MIST HARMFUL. EXPOSURE MAY CAUSE LUNG DAMAGE, ALLERGIC REACTION OR RESPIRATORY REACTION. MIXTURE HARMFUL TO AQUA LIFE. SHALLOVED MAY CAUSE EYE, SKIN, NOSE AND THROAT IRRITATION.

GLOSS

TRANSPARENT / COLORABLE

TRANSPARENT



Video Application & (Test) Results



How to use our UVA Coating System:

These products can be stored for up to 24 months *(in a dry, temperature-stable dark environment)*

Processing Temperature:

Ambient temperature: 41-86°F
Avoid direct sunlight, Rain and /or high humidity.

IMPORTANT:

Before you use a NANO-CERAMIC product, please make sure you wear suitable protection gear. We always recommend using a paint suit, respirator mask and latex or nitrile gloves.

Outfit/Applicators:



Respirator



Paint Suit



Nitrile gloves



MINI-MITE HVLP spray gun



Microfiber Roller
(6mm short nap)



Cotton Pads



Paint Brush
(acrylic)

Instructions for use:

Protect or Renew; Marble, Granite, Varnished wood, HPL, PVC or Vinyl laminate and Melamine. Creates an easy-to-clean, anti-scratch surface that is resistant to UV Discoloration, HF (Hydrofluoric Acid), Hydro-chloric Acid, and Citric Acid.

Wipe Application; 1. Clean the surface 2. Sterilize the surface 3. Apply via the cotton pad an even layer 4. Let it cure.

Spray Application; Use an HVLP (High Volume Low Pressure) spray gun with 60-80% transfer efficiency. Fit the spray gun with a 1.0-1.3 mm fluid tip. Set air pressure to 20-30 psi.

Preparation Steps:

1. Stir the coating thoroughly for 30 seconds before use.
2. Prior to application, strain the mixed coating through a suitable paint filter (e.g., 190-250 µm) to ensure a clean, defect-free spray.
3. Wash and decontaminate the surface.
4. Wet sand / scuff using 1500-2000 grit sandpaper.
5. Mask off any parts not to be coated.
6. Ensure environmental conditions are below 65% humidity.
7. Perform a final clean using 100% acetone.
8. Wipe with a tack cloth to remove any dust or lint.

Application Procedure:

1. Spray a light, even coat. Allow a 5-minute flash-off time, or until outgassing stops.
2. Apply a second coat. Allow to flash off for at least 15 minutes, or until outgassing stops.
3. Unmask carefully before the coating fully cures.

Curing:

Tough Dry 5min, Hard Dry 2 Hours, 85% Cured 12 Hours, 100% Cured 5 Days

Refer to the TDS/SDS for more information

How to use our Permanent Coating System:

These products can be stored for up to 24 months *(in a dry, temperature-stable dark environment)*

Processing Temperature:

Ambient temperature: 41-86°F
Avoid direct sunlight, Rain and /or high humidity.

IMPORTANT:

Before you use a NANO-CERAMIC product, please make sure you wear suitable protection gear. We always recommend using a paint suit, respirator mask and latex or nitrile gloves.

Outfit/Applicators:



Fresh Air Respirator



Paint Suit



Nitrile gloves



Professional Paint Sprayer
1.3-1.7mm / 0.05-0.06" nozzle

Application information

The SI11/SI12/SI21/SI22/SI31/SI33 coatings can be applied directly or indirectly on all surfaces (porous and non-porous) such as concrete, steel, wood, acrylic, gypsum, painted or unpainted surfaces, indoors, or outdoors. The surface underneath will be superbly protected against erosion and corrosion and will stay cleaner longer. Cleaning becomes quicker, easier, and less expensive, as special cleaning agents are unnecessary.

Preparation

Make sure the surface is free from any contamination and dirt. A zinc rich primer can be used in case of problems with the substrate. **Warning the surface must be completely dry before application and must stay dry for 6 hours after application after application!**

The 2-Component Permanent Coating System

Mix the can SI11B-SI12B-SI21B-SI22B-SI31B-SI33B with the can of SI11A-SI12A-SI21A-SI22A-SI31A-SI33A by pouring can B into can A, or measure exactly by net weight in a ratio of 7:3 and mix very well, or measure exactly by net weight in a ratio of 9:1 and mix thoroughly with a power agitator.

The 2-Component Permanent Coating System

Mix the can SI11B-SI21B-SI32B-SI33B with the can of SI11A-SI21A-SI32A-SI33A by pouring can B into can A, or measure exactly by net weight in a ratio of 9:1 and mix very well. Mix the can of SI21B with the can of SI21A by pouring can B into can A, or measure exactly by net weight in a ratio of 9:1 and mix thoroughly with a power agitator. Carefully pour the mixed contents into a professional paint sprayer, and spray in thin layers until the surface reaches your desired thickness. Let the surface dry for 24 hours. It is touch-dry in 1 hours, after 4 hours, 85% cured, and the remaining 15% (transformation into ceramics) is fully cured after

NANO-CERAMIC®

WWW.NANO-CERAMIC.COM INDUSTRIAL PROTECTIVE COATINGS



The Leader in Durability

Did you know?

*That our coatings are made
of pure silica sand, which is
the most common element
on Earth?*

Dealer

