

NANO-CERAMIC®



WWW.NANO-CERAMIC.COM THE NEXT GENERATION COATINGS




Transportation Clean & Protect

What is NANO-CERAMIC Thin Film Coating?

NANO-CERAMIC Thin Film Coating is a revolutionary, ultra-durable, ceramic clear-coating that provides superior scratchresistance and semi-permanent protection for all vehicle finishes, paints and exterior surfaces. (PFAS Free)

What makes NANO-CERAMIC Thin Film Coating so different?

NANO-CERAMIC Thin Film Coating is more than 4 times stronger than factory paint finishes and can absorb damage that would otherwise affect the appearance and integrity of your paint. This extremely durable ceramic coating reduces swirl marks and light scratches while protecting and preserving factory paint.

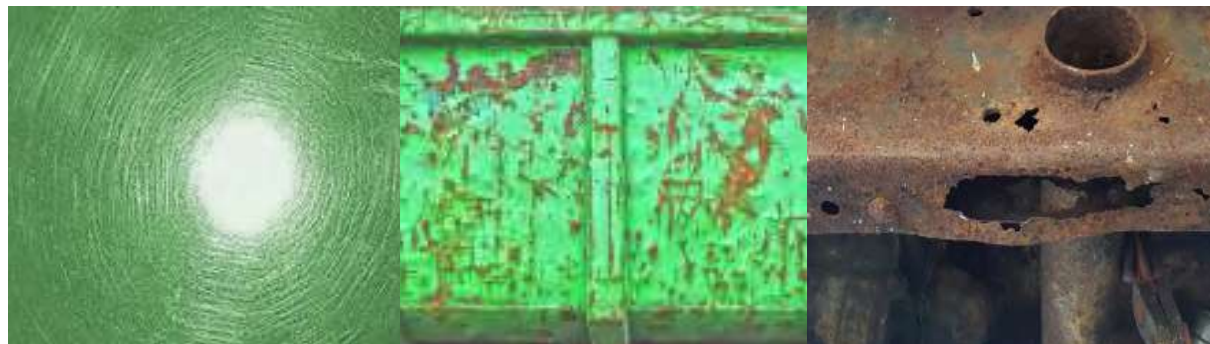

Conventional paints like acrylic urethane are simply not strong enough.

NANO-CERAMIC Thin Film Coating is completely resistant to acidic environmental substances like bird droppings, bug residue, acid rain, and tree sap, unlike your vehicle's factory paint, which can be permanently etched and damaged by these substances.

NANO-CERAMIC Thin Film Coating provides advanced protective barriers to your vehicle's surfaces, maintaining both high-gloss and matte finishes.




What are the benefits of applying NANO-CERAMIC Thin Film Coating?

NANO-CERAMIC Thin Film Coating provides vehicles with a superior, near-permanent, clear coating that is resistant to chemical etching, harder than factory paint finishes, and able to greatly reduce swirl marks and fine scratches while leaving a superior, hydrophobic surface that is easier to clean and stays cleaner longer.

Clearcoat, Glass vehicle materials can be treated with one of our NANO-CERAMIC Thin Film CERAMIC Restore the color and shine to plastic trim with advanced hydrophobic and UV protection. Even chrome, aluminum, and other metals can have added protection, as our coatings can withstand temperatures of over 1500°F



Step 1 The surface layer of factory clear coat is damaged and contaminated.



Step 2 Decontamination and polishing the clear coat to produce a smooth and even surface.



Step 3 Restoration of coating thickness with a super-durable layer of NANO-CERAMIC Thin Film





APPLY VIDEO
SCAN
QR CODE



SIO3 GLOSS

Body & Windshield Protection for clearcoat / glass / chrome

Product ID : SIO3BKIT 1.7oz 6 Micron SIO2BKIT 1.7oz 2 Micron
Consumption : +/- 0.007 oz/ft²
Reachable area : +/- 500ft² Body panels + 500ft² Windshield
Used for : Body panels, windshields, chrome, plastics, vinyl canopies
Application field : Transportation

Your Fleet will stand out! These Kit-Sets contain all to make trucks and busses protected with a High-Tech ceramic layer.

- Two simple steps: Clean with our Steril Cleaner and Apply
- The original surface is protected against corrosion.
- Makes the surface anti scratch, much easier and quicker to clean, and the adhesion of dirt is reduced drastically.
- Promotes more hygienic surfaces.

This coating has an outstanding hydrophobic effect, and the surface stays cleaner longer. Cleaning intervals as well as the formation of water spots will be greatly reduced.

Lasts for 5 Years+ (1 Years on Glass)



How to use: Page 33

- Easy to apply**
- Cut cleaning costs**
- Anti-water spot
Anti-corrosion**
- Super hydrophobic**
- Self-cleaning
stays cleaner longer**
- Anti-scratch**
- Visibility safety**
- Protects your investment**

Applicator:



APPLY VIDEO
SCAN
QR CODE



SIO5 MATTE

Body & Windshield Protection for clearcoat / glass / chrome

Product ID : SIO3BKIT 1.7oz 2 Micron HD SIO2BKIT 1.7oz 2 Micron
Consumption : +/- 0.007 oz/ft²
Reachable area : +/- 500ft² Body panels + 500ft² Windshield
Used for : Body panels, windshields, chrome
Application field : Transportation

Your Fleet will stand out! These Kit-Sets contain all to make trucks and busses protected with a High-Tech ceramic layer.

- Two simple steps: Clean with our Steril Cleaner and Apply
- The original surface is protected against corrosion.
- Makes the surface anti scratch, much easier and quicker to clean, and the adhesion of dirt is reduced drastically.
- Promotes more hygienic surfaces.

This coating has an outstanding hydrophobic effect, and the surface stays cleaner longer. Cleaning intervals as well as the formation of water spots will be greatly reduced.

Lasts for 5 Years+ (1 Years on Glass)



How to use: Page 33

- Easy to apply**
- Cut cleaning costs**
- Anti-water spot
Anti-corrosion**
- Super hydrophobic**
- Self-cleaning
stays cleaner longer**
- Anti-scratch**
- Visibility safety**
- Protects your investment**

Applicator:





STEP

One Step Polish for scratch removal

Product ID	: STEP0250 8.5oz
Consumption	: 0.017oz/ft ²
Used for	: Clearcoat, glass and acrylic
Application field	: Automotive

ONE STEP POLISH

Only this High Quality Polish Compound together with the above mentioned pads assure that every car can be polished from deep scratches till high gloss/zero swirl in one single step. This saves an enormous amount on working hours as polishing takes normally 65% of the total process to make a truck or bus a nano layer.

RECOMMENDED POLISH PADS

Purple Wool Heavy Cutting Pad cuts like natural sheepskin but finishes like a polish pad. Aggressively removes P1500 grit scratches, leaving a lustrous finish with no hazing by reducing compounding swirls.

The Cutting Pad is constructed with a blue foam and white microfiber. The Micro Cutting Pad with orange foam and white microfiber, the Polishing Pad is constructed with a black foam and black microfiber.

The pad serie is available 5.5 inch and 3 inch.



SKU-40201008-5.5INCH
SKU-40201408-3.0INCH



SKU-40201101-5.5INCH
SKU-40201501-3.0INCH



SKU-40201206-5.5INCH
SKU-40201608-3.0INCH



SKU-40201302-5.5INCH
SKU-40201702-3.0INCH



CLEAN

Steril Cleaner for hard surface pretreatment



Product ID	: CLEAN0500 16 oz CLEAN5000 1.32 gal / CLEAN020L 5 gal
Consumption	: +/- 0.01 oz/ft ²
Used for	: Clearcoat, windshields, mirrors, plastics, steel
Application field	: Transportation

100% Steril with nano interlock technology (active lifting encapsulate the grease from the surface)

- Surface cleaning and residue removal.
- Cleaning gloves, notebooks, phones or any other item entering the cleanroom.
- Wipe down for pass-through to controlled environments.
- Pretreatment for the application of thin film coating



Easy to apply
spray & wipe



Indoor
Outdoor



Remove grease



100% Steril



Visibility
Safety

Applicator:



100% Steril



SHRE

Pure Shine Shampoo for all exterior surfaces

Product ID : SHRE1000 32 oz / SHRE5000 1 gal / SHRE020L 5 gal
Consumption : 0.7 oz : 2.5 gal Water
Used for : Cleaning all exterior surfaces
Application field : Transportation



Reactivating Pure Shine Shampoo is an advanced technology, multi-purpose foaming cleaner containing a rinsing aid that will leave hard surfaces nearly dry after rinsing with clean water.

To assure the "easy-to-clean" effect that our nano layers provide, surfaces should be free of dyes, waxes or polymer sealants.

This multi-purpose cleaner contains no polymers or colors and will not leave a film of chemicals behind on the surface.

100% Safe to use for cleaning all non-porous surfaces and meets food grade classification for kitchens.

Contains no colouring chemicals which can discolor surfaces.



Easy to apply



Easy to clean



Stays cleaner longer



Food grade



Biodegradable

Applicator:



Dilution ratio 1: 500 (super economical)



MPCL

Multi Purpose Cleaner for all interior surfaces

Product ID : MPCL0500 16 oz / MPCL5000 1.32 gal / MPCL020L 5 gal
Consumption : 0.017 oz/ft²
Used for : Cleaning all interior surfaces, incl carpet
Application field : Transportation



The All-Purpose Cleaner is a fast, all-surface interior cleaner, low foaming, odor free, and especially suitable for removing stubborn stains from carpets, fabrics, vinyl, plastics and leather safely.

- It is very easy to clean dirt.
- Ready-to-use mixture with the right chemical strength and safe to use
- Of course it is safe for the surface of fabrics, carpets, plastics, leather, rubber and does not fade paint.
- Quickly remove dirt, dust and food scraps



Easy to apply
spray & wipe



No discoloration



Indoor
Outdoor



Quick to use



Spills are easy
to remove



Cleaner for longer

Safe to use does not harm or discolor the surface.

What is NANO-CERAMIC UVA Topcoat?

NANO-CERAMIC® UVA Topcoat is an innovative low-VOC, non-PFAS, sprayable protective coating designed especially for the demanding conditions of trucks and buses. This self-leveling system forms an ultra-hard, glass-like hydrophobic barrier that delivers superior protection and a sleek, high-gloss finish.

Engineered for extreme durability, UVA Topcoat resists harsh weather, intense UV radiation, road salts, and aggressive chemicals commonly encountered in road transport. It is fully safe and compliant for use on passenger and cargo vehicles—including food-contact areas—ensuring both safety and performance.

Powered by cutting-edge nanotechnology, UVA Topcoat extends the service life of critical surfaces such as polyester, epoxy, polyurethane, acrylic resins, steel, aluminum, composites, and wood. It effectively prevents corrosion, surface degradation, and environmental wear—making it the ideal all-in-one solution to protect truck and bus exteriors, cargo areas, canopies, and interiors.

Why UVA Topcoat is a Game-Changer in Protection?

For decades, protective coatings like epoxy, polyurethane (PU), and acrylic have been the industry standard. However, they all share a critical weakness—UV degradation. Prolonged exposure to sunlight causes these coatings to yellow, crack, and deteriorate, leading to costly maintenance and premature failures.

Superior Performance at the Lowest Cost.

UVA Topcoat isn't just another coating—it's a next-generation solution designed to simplify and reduce costs in truck and bus maintenance. By replacing complex, multi-layer systems with a single, high-performance layer, it streamlines your coating process.

Applied directly over existing automotive paints and materials, UVA Topcoat eliminates the need for expensive refinishing or additional topcoats, saving both time and money. Its advanced chemistry and ease of application make traditional coating systems obsolete for vehicle exteriors, cargo areas, canopies, and more.


Where can UVA Topcoat be used?

UVA Topcoat is highly versatile and ideal for a wide range of truck and bus applications:

- Exteriors – Body panels, bumpers, roofs, and vinyl canopies or tarps for durable protection
- Cargo Areas – Beds, storage compartments, and canopy coverings with chemical and abrasion resistance
- Interiors – Dashboards, seats, walls, and floors for easy cleaning and long-lasting finish
- Chassis and Undercarriage – Protection against corrosion, road salts, and harsh weather

Compatible with both new vehicles and retrofits, UVA Topcoat adapts to various materials and tough operating conditions common in truck and bus transport.

How it Works

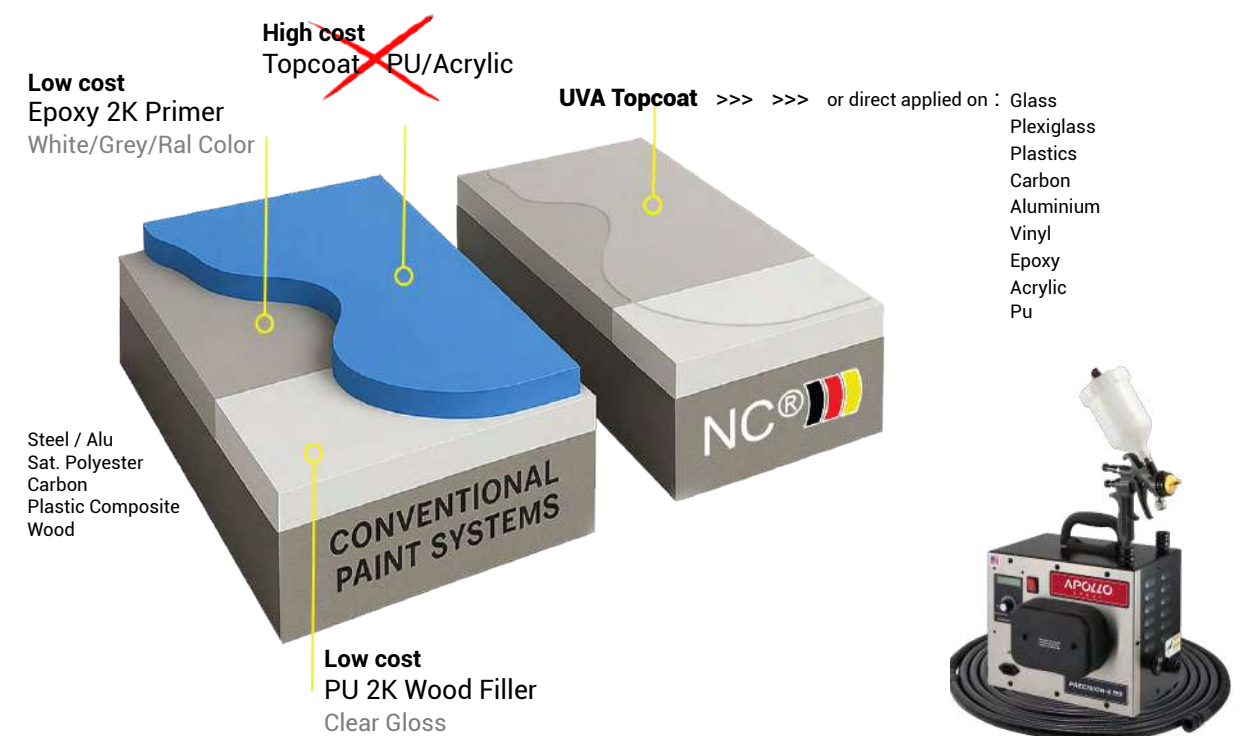

Freedom in Protection Years

Long-Lasting Protection, Layer by Layer
A single 6 µm (micron) layer applied using HVLP spray technology can provide up to 8 years of protection. Need more durability? Just add more layers—it's that simple.

Apply wet-on-wet: once the first coat flashes off (dry to the touch but still tacky), you can immediately apply the next. This method prevents trapped gases and creates a seamless, chemical-resistant film with hydrophobic properties—making surfaces easier to clean and maintain.

Coverage & Application Efficiency



UVA Topcoat is engineered for maximum efficiency with minimal material use—delivering high-performance protection at a fraction of the volume required by traditional coatings.

Recommended usage is approximately ±0.025 lbs/ft² per layer (by wipe or spray), resulting in a film thickness of around 6 microns, with one liter covering up to 800 ft²..

Color Tinting Option

For customized aesthetics, UVA Topcoat can be tinted using our colorants on pages 22–23. These high-performance, solvent-free pigments deliver long-lasting color stability and excellent UV resistance—ideal for truck and bus exteriors, interiors, and cargo areas where both protection and appearance are essential.


Perfect for any visible surface requiring a durable, colored finish without compromising the coating's hydrophobic and chemical-resistant properties.

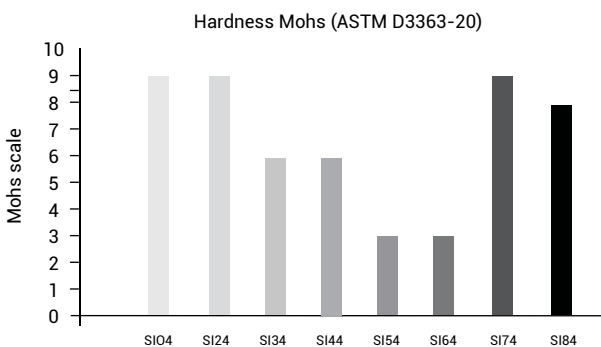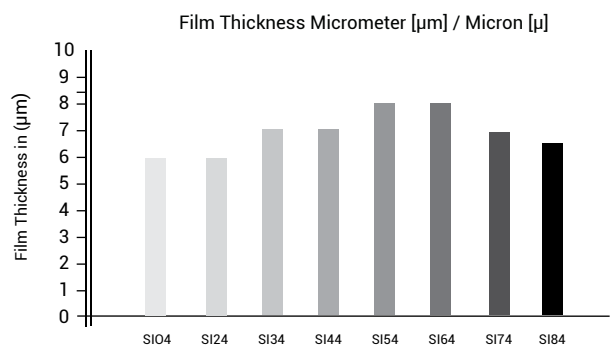

Quality Comparison of paints technologies

In case written in bold font it means existing shortcomings in quality.

Characteristics	Acrylic Latex walls ceilings	Acrylic walls floors	Epoxy floors	Polyurethane waterproofing	UVA Topc all surfaces
Primer	Yes	Yes	Yes	Yes	No
Adhesion Strength	Poor	Poor	Poor	Poor	Excellent
Cross Cut Test	Poor	Poor	Good	Poor	Excellent
Abrasion Resistance	Poor	Poor	Average	Poor	Excellent
UV Radiation Resistance	Average	Average	Poor	Good	Excellent
Artificial Atmospheric Agents	Poor	Poor	Good	Good	Excellent
Colour Retention	Average	Average	Poor	Poor	Excellent
Gloss Retention	Poor	Poor	Poor	Poor	Excellent
Chemical Resistance	Good	Good	Good	Poor	Excellent
Severe Chemical Attack	Poor	Poor	Average	Poor	Excellent
Temperature Resistance	140°F	196°F	350°F	505°F	550°F
Thermal Shock Resistance	Good	Good	Poor	Good	Excellent
Carbon Dioxide Permeability	Poor	Poor	Good	Poor	Excellent
Permeability water vapour	Average	Average	Good	Average	Excellent
Water Absorption Rate	5-15%	1%	2%	3%	0%
Aging at 70°C	Poor	Poor	Good	Average	Excellent
Adhesion Strenght Pull-off	Poor	Average	Good	Poor	Excellent
Impact Resistance	Poor	Average	Good	Poor	Excellent
Anti-Graffiti	No	No	No	No	Yes
Anti-Termite (Wood)	No	No	No	No	Yes
Hydrophobic Self Cleaning	No	No	No	No	Yes
Easy to Clean	No	No	No	No	Yes
Total Solar Reflectance (TSR)	60 (white)	60 (white)	60 (white)	60 (white)	88 (white)
Expected Lifetime in Years	<7	<7	<5-15	<5-15	8/16/24

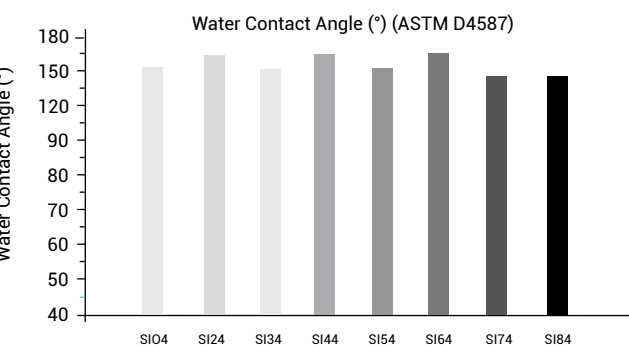



APPLY
VIDEO
SCAN
QR CODE



SIO4

1-Component (1K)

Topcoat Transparent for glossy surfaces



Product ID : SIO41LUVA 32 oz / 2.03 lbs SIO405UVA 16 oz / 1 lbs
Consumption : 3 layers +/- 0.075 lbs/ft² - 0.12 oz/ft² 18 micron = 200 ft²
Reachable area : 2 layers +/- 0.050 lbs/ft² - 0.08 oz/ft² 12 micron = 400 ft²
 : 1 layer +/- 0.025 lbs/ft² - 0.04 oz/ft² 6 micron = 800 ft²
Hardness/Cupping : H9 / Flexibility ISO 1520 >0.8"
Used for : Body panels, windshields, chrome, plastics, vinyl canopies
Application field : Transportation

SIO4 is an incredibly strong 1-component paint system which forms a durable matrix of molecular bonds (transformation to ceramic) resulting in permanent protection of the surface.

Three simple steps: Clean, Dry, and Apply.

- Easily repels water, dirt, dust, and pollutants.
- This coating is permanent hydrophobic.
- Restores damaged finishes and reduces cleaning intervals.
- Resistant to all kinds of chemicals and UV radiation.
- Superior anti-pollution and anti-corrosion properties.
- This coating can withstand temperatures of 550°F.

Expected life duration 4-16 or 24 Years (layer thickness)



Easy to apply
Repaintable



Cut maintenance costs



Anti-water spot
Anti-corrosion



Permanent hydrophobic



Self-cleaning
Cleaner for longer



Anti-scratch



Impact Resistance
30"-2lbs



Protects your investment

How to use: Page 34



TEST
REPORT
SCAN QR
CODE



SI24

1-Component (1K)

Topcoat Transparent for matte surfaces



Product ID : SI241LUVA 32 oz / 2.13 lbs SI2405UVA 16 oz / 1.05 lbs
Consumption : 3 layers +/- 0.075 lbs/ft² - 0.12 oz/ft² 18 micron = 200 ft²
Reachable area : 2 layers +/- 0.050 lbs/ft² - 0.08 oz/ft² 12 micron = 400 ft²
 : 1 layer +/- 0.025 lbs/ft² - 0.04 oz/ft² 6 micron = 800 ft²
Hardness/Cupping : H9 / Flexibility ISO 1520 >0.8"
Used for : Body panels, windshields, chrome, plastics, vinyl canopies
Application field : Transportation

SI04 is an incredibly strong 1-component paint system which forms a durable matrix of molecular bonds (transformation to ceramic) resulting in permanent protection of the surface.

Three simple steps: Clean, Dry, and Apply.

- Easily repels water, dirt, dust, and pollutants.
- This coating is permanent hydrophobic.
- Restores damaged finishes and reduces cleaning intervals.
- Resistant to all kinds of chemicals and UV radiation.
- Superior anti-pollution and anti-corrosion properties.
- This coating can withstand temperatures of 550°F

Expected life duration 4-16 or 24 Years (layer thickness)



Easy to apply
Repaintable



Cut maintenance costs



Anti-water spot
Anti-corrosion



Permanent hydrophobic



Self-cleaning
cleaner for longer



Anti-scratch



Impact Resistance
30"-2lbs



Protects your investment

How to use: Page 34



Multi-Grade Color Protection – Super Transparent

For trucks and trailers where weight, durability, and efficiency matter, our advanced hybrid coating system delivers a breakthrough: vibrant transparent tints or metallic finishes without sacrificing performance.

By blending NANO-CERAMIC® Super Transparent Colorants into our UVA Topcoat, you get:

- Ultra-thin coating (<15 microns) = minimal added weight
- H9 surface hardness = maximum scratch and abrasion resistance
- Hydrophobicity = fast cleaning, less dirt build-up
- UV & chemical resistant = long-lasting protection in harsh road conditions
- Optional metallic effect = custom finishes for premium fleet appearance

Applications:

- Truck & trailer carroserie / bodywork
- Trailer panels & aerodynamic fairings
- Interior partitions & skylights
- Dashboards & control panels
- Aluminum trims & exterior detailing



TRANSOXIDE RED A-G 130
Masstone
Tint
77491-1 100 ml



TR.OXIDE YELLOW A-2R 130
Masstone
Tint
77492-1 100ml



YELLOW A-N4G 100-ST
Masstone
Tint
279376 100 ml



RED A-P2Y 100-ST
Masstone
Tint
289404 100 ml



PINK A-EB 100-ST
Masstone
Tint
287516 100 ml



BLUE A-BTR 100-ST
Masstone
Tint
290247 100 ml



BLUE A-BTG 100-ST
Masstone
Tint
275536 100 ml



GREEN A-GBX 100-ST
Masstone
Tint
323291 100 ml



BLACK A-NB 100-ST
Masstone
Tint
289518 100 ml



BLACK A-NY 100-ST
Masstone
Tint
272060 100 ml

Lightweight, Ultra-Hard, Built for Speed. Opaque Ral

This coating system enhances both performance and aesthetics – making trucks and busses longer lasting, cleaner, safer and more refined.



YELLOW A-F2G 100
Masstone
Tint
11785 100 ml



YELLOW A-H3G 100
Masstone
Tint
11781 100 ml



YELLOW A-HRD 100
Masstone
Tint
21108 100 ml



ORANGE A-HLD 100
Masstone
Tint
11780 100 ml



RED A-D3GD 130
Masstone
Tint
56110 100 ml



PINK A-E 130
Masstone
Tint
73915 100 ml



RED VIOLET A-ER 130
Masstone
Tint
73900 100 ml



VIOLET A-RL 100
Masstone
Tint
51319 100 ml



BLUE A-BG 100
Masstone
Tint
74160 100 ml



GREEN A-GNX 130
Masstone
Tint
74260 100 ml



BLACK A-N 100
Masstone
Tint
77266 100 ml



OXIDE YELLOW A-BV 100
Masstone
Tint
771740 100 ml



OXIDE YELLOW A-CR 100
Masstone
Tint
77310 100 ml



OXIDE YELLOW A-R 100
Masstone
Tint
77492 100 ml



OXIDE RED A-B 100
Masstone
Tint
77491 100 ml



WHITE A-R 100
Masstone
Tint
77891 100 ml

What is NANO-CERAMIC Permanent Coating?

NANO-CERAMIC permanent coating is the latest generation of protective coating which transforms paint into a hard ceramic, providing superior scratch resistance and permanent protection for all exterior or interior surfaces. (PFAS-free)

NANO-CERAMIC permanent coating is 600°F resistant and more than 6 times stronger than traditional acrylic based paint finishes, and is effectively preventing damage that would otherwise affect the appearance and integrity of the original surface.

Zero Maintenance for 3 decades to come!

Our NANO-CERAMIC permanent coating is rigorously tested by an independent testing laboratory according to the European standard for outdoor paints (EN 1504-2) please find the test report on page 19.

Can NANO-CERAMIC Permanent Coating be applied on any surface?


The NANO-CERAMIC permanent coating can be applied directly or indirectly on all kinds of interior and /or exterior surfaces (absorbing and non-absorbing), such as concrete, steel, wood, acrylic, glass, gypsum and many more.



Is NANO-CERAMIC Permanent Coating self-cleaning?

NANO-CERAMIC permanent coating provides a permanent hydrophobic surface that is self cleaning, easier to clean and stays cleaner longer as water and dirt can not penetrate the ceramic layer. NANO-CERAMIC permanent coating is resistant to water vapor and water absorption.

Cross Sections of NC® Coating Systems

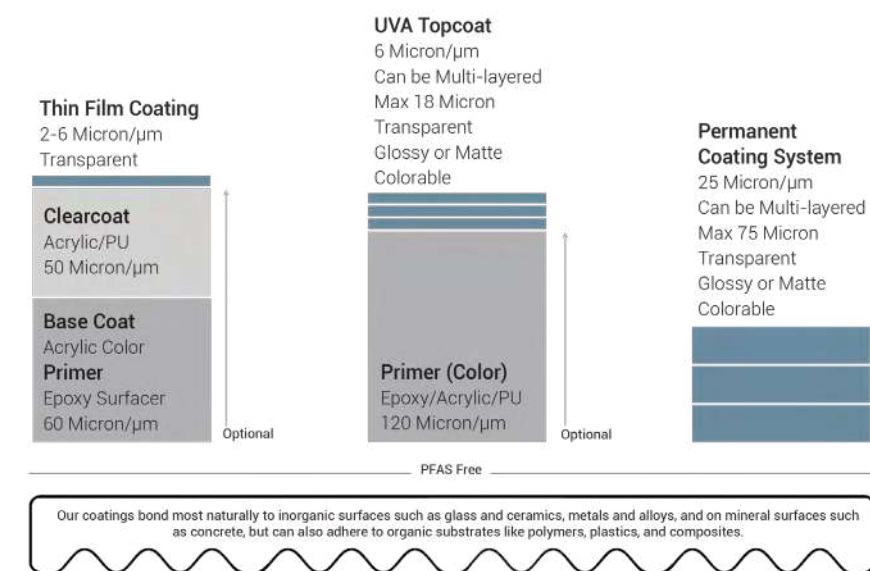

Conventional paints

The lifespan of conventional paints and coatings depends primarily on their placement and environment. These coatings—made from resins like epoxy, acrylic, PU, or polyester combined with pigments—rely on both component quality and chemical resistance to determine durability. Although their lifespan can reach up to 15 years, it often falls short due to hardness degradation, UV-induced color fading, and chemical attack. Exposure to harsh agents (e.g. solvents, acids, bases, salts) can cause swelling, gloss loss, adhesion failure, blistering, or surface breakdown. Additionally, when the paint film softens or becomes water-sensitive—often due to additives—it can absorb dirt rather than just accumulate it, leading to a dull, matte, or cloudy appearance that cannot be cleaned off and may require stripping the surface to restore clarity.

There is no better option than protecting your fleet with a NANO-CERAMIC Thin Film or Permanent Coating!

Do not wait till the surface get worse, most easy is to apply wipe or spray when the surfaces are still in new or in nearly new condition and the cost do not outweigh the benefits



APPLY
VIDEO
SCAN
QR CODE



SI11/12 2-Component (2K)

Topcoat Clear+ for glossy or matte surfaces

Product ID	: SI112000 67 oz / 4.2 lbs SI122000 67 oz / 4.5 lbs
Consumption	: 3 layers 0.06 lbs/ft ² - 0.96 oz/ ft ² = 3 mil/ 70 ft ²
Reachable area	: 2 layers 0.04 lbs/ft ² - 0.64 oz/ ft ² = 2 mil/140 ft ² : 1 layer 0.02 lbs/ft ² - 0.32 oz/ ft ² = 1 mil/210 ft ²
Hardness	: H9
Used for	: Fiberglass, steel, aluminium, kevlar, plastics, wood
Application field	: Transportation

SI11 is an incredibly strong 2-component paint system which forms a durable matrix of molecular bonds (transformation to ceramic) resulting in permanent protection of the surface.

Three simple steps: Clean, Dry, and Apply.

- Easily repels water, dirt, dust, and pollutants.
- This coating is permanent hydrophobic.
- Restores damaged finishes and reduces cleaning intervals.
- Resistant to all kinds of chemicals and UV radiation.
- Superior anti-pollution and anti-corrosion properties.
- This coating can withstand temperatures of 600°F.

Expected life duration up to 30 years+



How to use: Page 35



Near-permanent



Cut maintenance costs



Anti-corrosion



Permanent hydrophobic



UV protection



Self-cleaning
Stays cleaner longer



Impact Resistance
30" - 2 lbs



Thermal Shock-
Resistant



Save on fuel
Save on repaints



TEST
REPORT
SCAN QR
CODE



SI21/22 2-Component (2K)

Paint Strongest White for glossy or matte surfaces

Product ID	: SI212000 67 oz / 5.3 lbs SI222000 67 oz / 5.5 lbs
Consumption	: 3 layers 0.044 lbs/ft ² - 0.56 oz/ ft ² = 3 mil/120 ft ²
Reachable area	: 2 layers 0.030 lbs/ft ² - 0.37 oz/ ft ² = 2 mil/160 ft ² : 1 layer 0.014 lbs/ft ² - 0.19 oz/ ft ² = 1 mil/240 ft ²
Hardness	: H8
Used for	: Fiberglass, steel, aluminium, kevlar, plastics, wood
Application field	: Transportation

SI21 is an incredibly strong 2-component paint system which forms a durable matrix of molecular bonds (transformation to ceramic) resulting in permanent protection of the surface.

Three simple steps: Clean, Dry, and Apply.

- Easily repels water, dirt, dust, and pollutants.
- This coating does not absorb any water
- Resistant to all kinds of chemicals and UV radiation.
- This coating can withstand temperatures of 600°F

Expected life duration up to 25 years+



How to use: Page 35



Near-permanent



Cut maintenance costs



Anti-corrosion



Permanent hydrophobic



UV protection



Self-cleaning
Stays cleaner longer




Impact Resistance
30" - 2 lbs



Thermal Shock-
Resistant



Save on fuel
Save on repaints

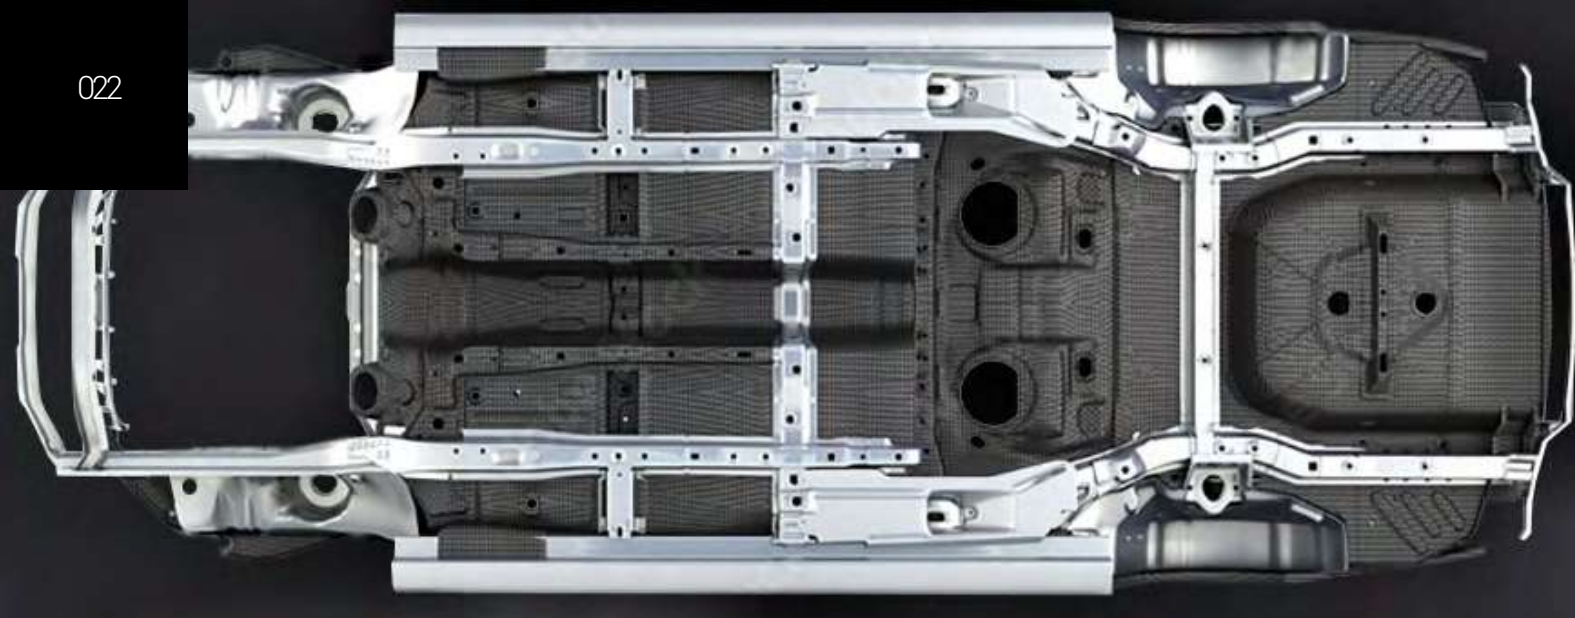

SI32

2-Component (2K)

Undercoat Textured Transparent for semi gloss surfaces

Product ID	: SI322000 67 oz / 4.4 lbs
Consumption	: 3 layers 0.050 lbs/ft ² - 0.76 oz/ ft ² = 3 mil/ 90 ft ²
Reachable area	: 2 layers 0.033 lbs/ft ² - 0.51 oz/ ft ² = 2 mil/180 ft ² : 1 layer 0.017 lbs/ft ² - 0.25 oz/ ft ² = 1 mil/270 ft ²
Hardness	: H9
Used for	: Undercarriage, chassis, wheel arches, bedlining
Application field	: Transportation

SI32 is an incredibly strong 2-component coating system which forms a durable matrix of molecular bonds (transformation to ceramic) resulting in permanent protection of the surface.

Three simple steps: Clean, Dry, and Apply.

- Easily repels water, dirt, dust, and pollutants.
- This coating is permanent hydrophobic.
- Restores damaged finishes and reduces cleaning intervals.
- Resistant to all kinds of chemicals and UV radiation.
- Superior anti-pollution and anti-corrosion properties.
- This coating can withstand temperatures of 600°F.

Expected life duration up to 30 years+



How to use: Page 35



SI33

2-Component (2K)

Undercoat-Bedliner Textured Black for semi gloss surfaces

Product ID	: SI322000 67 oz / 4.4 lbs (Tinted on location)
Consumption	: 3 layers 0.050 lbs/ft ² - 0.76 oz/ ft ² = 3 mil/ 90 ft ²
Reachable area	: 2 layers 0.033 lbs/ft ² - 0.51 oz/ ft ² = 2 mil/180 ft ² : 1 layer 0.017 lbs/ft ² - 0.25 oz/ ft ² = 1 mil/270 ft ²
Hardness	: H9
Used on	: Undercarriage, chassis, wheel arches, bedlining
Application field	: Transportation

SI33 is an incredibly strong 2-component coating system which forms a durable matrix of molecular bonds (transformation to ceramic) resulting in permanent protection of the surface.

Three simple steps: Clean, Dry, and Apply.

- Easily repels water, dirt, dust, and pollutants.
- This coating is permanent hydrophobic.
- Restores damaged finishes and reduces cleaning intervals.
- Resistant to all kinds of chemicals and UV radiation.
- Superior anti-pollution and anti-corrosion properties.
- This coating can withstand temperatures of 600°F.

Expected life duration up to 25 years+



How to use: Page 35



APPLY VIDEO
SCAN
QR CODE

Color mixing has never been so easy!!!

X- SMART is the modular version of the acclaimed dispenser series, extremely cost-effective and easy to operate, with a low maintenance

This color mixer has a robust and tubeless design, built with a patented pump technology (to reduce waste) and identical features, making it a highly advanced dispenser, ideally suited to reduced capacity.



Prisma-RT is a cloud-based innovative mobile color application compatible with the X-SMART dispenser. It brings the best of wireless technology without the associated investment costs in hardware. Customers do not have to provide computers and other accessories or set up servers, eliminating the need for complicated and time-consuming installation and configuration. This smart Prisma-RT device helps to fix prices and taxes and can print labels via Wi-Fi.



X-SMART
Stabilizer plates

16 High Grade Coloring chemicals



Titanium White
Masstone
Tint
844-0061 1.05 gal



Quinacridone Red
Masstone
Tint
844-0451 32 oz



Scarlet Red
Masstone
Tint
844-0526 32 oz



Lead Free Orange
Masstone
Tint
844-0982 32 oz



Trans Red Oxide
Masstone
Tint
844-1054 32 oz



Red Oxide
Masstone
Tint
844-1063 32 oz



Burnt Umber
Masstone
Tint
844-1352 32 oz



Trans Yellow Oxide
Masstone
Tint
844-1852 32 oz



Yellow Oxide
Masstone
Tint
844-1863 32 oz



Lead Free Med Yellow
Masstone
Tint
844-2555 32 oz



Yellow
Masstone
Tint
844-2826 32 oz



Organic Yellow
Masstone
Tint
844-2852 32 oz



PHTHALO Green
Masstone
Tint
844-5558 32 oz



Quinacridone Violet
Masstone
Tint
844-9451 32 oz



Lamp Black
Masstone
Tint
844-9955 32 oz



PHTHALO BLUE
Masstone
Tint
844-7262 32 oz

Color card

Residential

SI13 White Egg-Shell (Flat Finish) 15/25 (20/60°)

SI15 White Egg Shell (Flat Finish) 18/28 (20/60°)

SI21 White Gloss 49/77 (20/60°)

SI22 White Satin 33/59 (20/60°)

SI41 Textured White Semi Gloss 41/69 (20/60°)

SI42 Textured White Matte 11/21 (20/60°)

Original

Cool white

RAL 9001

Cream white

RAL 9002

Grey white

RAL 9003

Signal white

RAL 9004

Signal black

RAL 9005

Jet black

RAL 9006

White aluminium

RAL 9007

Grey aluminium

RAL 9010

Pure white

RAL 9011

Graphite black

RAL 9016

Traffic white

RAL 9018

Papyrus white

RAL 9022

Pearl light grey

RAL 9023

Pearl dark grey

RAL 1000

Green beige

RAL 1001

Beige

RAL 1002

Sand yellow

RAL 1011

Brownbeige

RAL 1013

Pearl white

RAL 1014

Ivory

RAL 1015

Light Ivory

RAL 9017

Traffic black

RAL 3015

Light pink

RAL 5007

Pastel blue

RAL 4009

Pastell violet

RAL 6027

Light green

RAL 7030

Squirrel grey

RAL 1036

Pearl gold

RAL 8029

Pearl copper

RAL 8012

Pearl blackberry

RAL 9025

Pearl gentian blue

RAL 6036

Pearl opal green

RAL 8016

Mahogany braun

Wood

SI11 Transparent Gloss 51/78 (20/60°)

SI12 Transparent Matte 11/21 (20/60°)

SI11 Transparent

SI11 Light

SI11 Nut

SI11 Colonial

Industrial

SI11 Transparent Gloss 51/78 (20/60°)

SI21 White Gloss 49/77 (20/60°)

SI22 White Satin 33/59 (20/60°)

Transparent

Lumious yellow

RAL 3020

Traffic red

RAL 9005

Jet black

RAL 1004

Golden yellow [Cat]

RAL 6002

Leaf green [J.D Deere]

RAL 7035

Light grey

RAL 7011

Dark grey

RAL 7001

Silver grey

RAL 8032

Signal brown

RAL 8025

Pale brown

Other colors need minimal 220 lbs

Marine

SI12 Transparent Matte 11/21 (20/60°)

SI41 Textured White Semi Gloss 41/69 (20/60°)

SI42 Textured White Matte 11/21 (20/60°)

Original

Cool white

RAL 9010

Pure white

RAL 9001

Cream white

RAL 9023

Distant blue

RAL 1023

Traffic yellow

RAL 7001

Silver gray

RAL 1015

Light Ivory

RAL 9016

Pure white

RAL 9001

Cream

RAL 1001

Beige

RAL 1020

Olive yellow

RAL 3000

Fire red

RAL 3004

Burgundy

RAL 7036

Platinum

RAL 9005

Jet Black

RAL 9019

Turquoise bleu

RAL 6027

Light green

RAL 9000

Violet blue

RAL 9012

Light blue

RAL 9002

Ultramarine blue

RAL 9013

Sapphire blue

RAL 5005

Signal blue

RAL 7031

Blue grey

RAL 9005

Jet black

RAL 5006

NATO green

RAL 7024

Graphite grey

RAL 1015

Desert sand

Camo beige

Dark grey camo

Dark brown camo

Olive drap

Very dark drap

RAL 6031

Bronze green

RAL 6451

Brunswick green

RAL 7016

Dark sea grey

RAL 5008

[RAF] Blue grey

Antifouling

SI14 Color 31/41 (20/60°)

Transparent

RAL 9005

Jet Black

RAL 3001

Signal Red

RAL 5002

Ultra marine blue

RAL 7004

Signal Grey



SIX1

2-Component (2K)

Primer Epoxy Polyamide

heavy duty - anti-corrosion

Product ID : SIX11250-WH/GR 42 oz / 3.2 lbs SIX15000-WH/GR 1.32 gal / 12.8 lbs
Consumption : 2 layers +/- 0.53 lbs/ft² - 0.7 oz/ft² 80 micron = 50 ft²
Reachable area : 1 layer +/- 0.26 lbs/ft² - 0.4 oz/ft² 40 micron = 100 ft²
Hardness : H5
Colors : White, Grey or RAL (RAL Minimum Order 250 pcs 1.32 gal)
Used on : Concrete, Steel, Aluminium, Fiberglass and other organic surfaces
Application area : Buildings, marine, airports, offshore structures, bridges



Fast Repaintable



Excellent adhesion

SIX1 is a solvent based epoxy polyamide primer. This primer is used for corrosion protection on concrete, stainless, galvanized, carbon and alloy steel, aluminum in corrosive conditions and has excellent adhesion to all organic substrates and to all of our ceramic topcoats. The primer can be applied at a relative humidity of 40-80% and can be painted over within 8 hours 85°F, 1 hours 140°F.



Heavy Duty Primer - Smooth Surfacer

SIX2

2-Component (2K)

Primer Surfacer Acrylic Alkyd

smooth - surface modifier

Product ID : SIX21250-WH/GR 42 oz / 3.2 lbs SIX25000-WH/GR 1.32 gal / 12.8 lbs
Consumption : 2 layers +/- 0.44 lbs/ft² - 0.7 oz/ft² 60 micron = 60 ft²
Reachable area : 1 layer +/- 0.22 lbs/ft² - 0.4 oz/ft² 30 micron = 120 ft²
Hardness : H3
Colors : White or Grey
Used on : Steel, aluminium, wood, fiberglass, and old paint systems.
Application area : Buildings, marine, airports, bridges



Fast Repaintable



Excellent adhesion



VOC Free

SIX2 High-quality 2K surfacer (two-component basecoat) for auto-refinish, marine, and industrial coating applications where a smooth surface is required. The primer has excellent adhesion to all organic substrates and to all of our ceramic topcoats. The primer can be applied at a relative humidity of 30-80% and can be painted over within 4 hours 85°F, 1 hours 140°F.



SIX3

2-Component (2K)

Primer PU Wood Filler

surface modifier - absorbtion reducer

Product ID	: SIX31500 51 oz / 3.3 lbs
Consumption	: 2 layers +/- 0.40 lbs/ft ² - 0.6 oz/ft ² 60 micron = 80 ft ²
Reachable area	: 1 layer +/- 0.20 lbs/ft ² - 0.3 oz/ft ² 30 micron = 120 ft ²
Hardness	: H4
Used on	: Steel, Aluminium and other organic surfaces
Application area	: Buildings, marine, airports, offshore structures, bridges

SIX3 is a solvent borne transparent wood filler. This primer is used as surface modification for, wood or natural stone to reduce capillary absorption and has an excellent adhesion to all organic substrates and towards one of our ceramic top coats. The primer can be applied at a relative humidity of 40-80%.



Fast Repaintable



Excellent adhesion



Wood Filler - All Surface modifier

SIX5

2-Component (2K)

Putty Polyester

ultra smooth - sandable

Product ID	: SIX51000-WH/GR 2.2 lbs
Colors	: White, Grey
Used on	: Metal, wood, fiberglass, concrete, plastics
Application area	: Transportation.

SIX5 is a High quality 2 (two) component Epoxy base putty for auto-refinish, marine and industrial coating applications.



Fast Repaintable



Excellent adhesion

RETA/ACCL

Retarder / Accelerator

slow down flash time or speed up curing

Product ID	: RETA0400 14 oz / 0.85 lbs	ACCL0200 7 oz / 0.4 lbs
-------------------	-----------------------------	-------------------------

If your application needs a longer flash time (for example, in hot temperatures) to build up the layer with a second or third coat, you can add the RETA Retarder. If you want to speed up the curing process, you can add the ACCL Accelerator. It can reduce curing time by 30–70% compared to uncatalyzed systems, and full hardness can develop 1.5–2× faster.



SOLV

Thinner solvent

for all types of our ceramic paint & coating

Product ID : SOLV0400 14 oz / 0.8 lbs SOLV2000 64oz / 3.9 lbs

All our paints and coatings are ready to use, for certain spray applications, especially dark colors who require more than average color pigments, it may be necessary to use a little thinner solvent to achieve optimum flowability.



Where to use our Coatings



How to use our Thin Film Coatings:

These products can be stored for up to 24 months (in a dry, temperature-stable dark environment)

Processing Temperature:

Ambient temperature: 41-86°F
Avoid direct sunlight, Rain and /or high humidity.

IMPORTANT:

Before you use a NANO-CERAMIC product, please make sure you wear suitable protection gear. We always recommend using a paint suit, respirator mask and latex or nitrile gloves.



Mask



Nitrile gloves

Instructions for use:

Surface Preparation

- Wash all surfaces thoroughly with our Pure Shine Shampoo. if heavily soiled, pre-clean using Scrub Cleaner
- Dry completely.
- Polish if needed using our One Step Polish (works best on new or like-new surfaces).
- Use nitrile gloves, apply Steril Pretreatment Cleaner with clean towels—use multiple clean cloths to remove greasy avoid smearing dirt around.
- Ensure the surface is spotless; contamination can cause visible defects in the cured coating.

Application (SI03–SI05 Top Coat)

- Watch the application video via the QR code for technique guidance.
- Glove up! Remove the closure, insert the dropper, and shake well.
- Work in manageable sections following panel shapes and edges for overlap control.
- Use the applicator block with a suede mini-towel on top and apply 6–8 drops per 15 × 15" inches, adjusting if towel feel too dry.
- Start from the center of the section ⚠ (otherwise it's hard to spread from corner to corner)
- Spread with light pressure in criss-cross strokes until product is evenly applied.
- Keep going until no residue remains.
- Avoid over-applying—uneven layers and rolling-ups often result from too much product. (most common failure)
- If applied correctly, almost no polishing with a microfiber towel is needed afterward. (but you still polish with a clean microfiber towel to make sure that haze / residue is removed)

Application (SI02 Safety Vision Window Coating)

- Thoroughly clean both the inside and outside of the windshield, including wiper blades and seals, using Steril Pretreatment Cleaner
- Watch the application video via the QR code for technique guidance.
- Dispense 10–15 drops of coating onto a cotton pad, then rub it in evenly across the glass using firm pressure on the pad.
- Continue until a light gray haze becomes visible over the surface. (Wait approximately 2 minutes (at 68°F) for solvents to evaporate)
- Gently buff away the haze with a clean microfiber cloth.

Curing:

Tough Dry 5min, Hard Dry 2 Hours, 85% Cured 12 Hours, 100% Cured 5 Days

How to use our UVA Coating System:

These products can be stored for up to 24 months *(in a dry, temperature-stable dark environment)*


Processing Temperature:

Ambient temperature: 41-86°F
Avoid direct sunlight, Rain and /or high humidity.

IMPORTANT:

Before you use a NANO-CERAMIC product, please make sure you wear suitable protection gear. We always recommend using a paint suit, respirator mask and latex or nitrile gloves.

Outfit/Applicators:

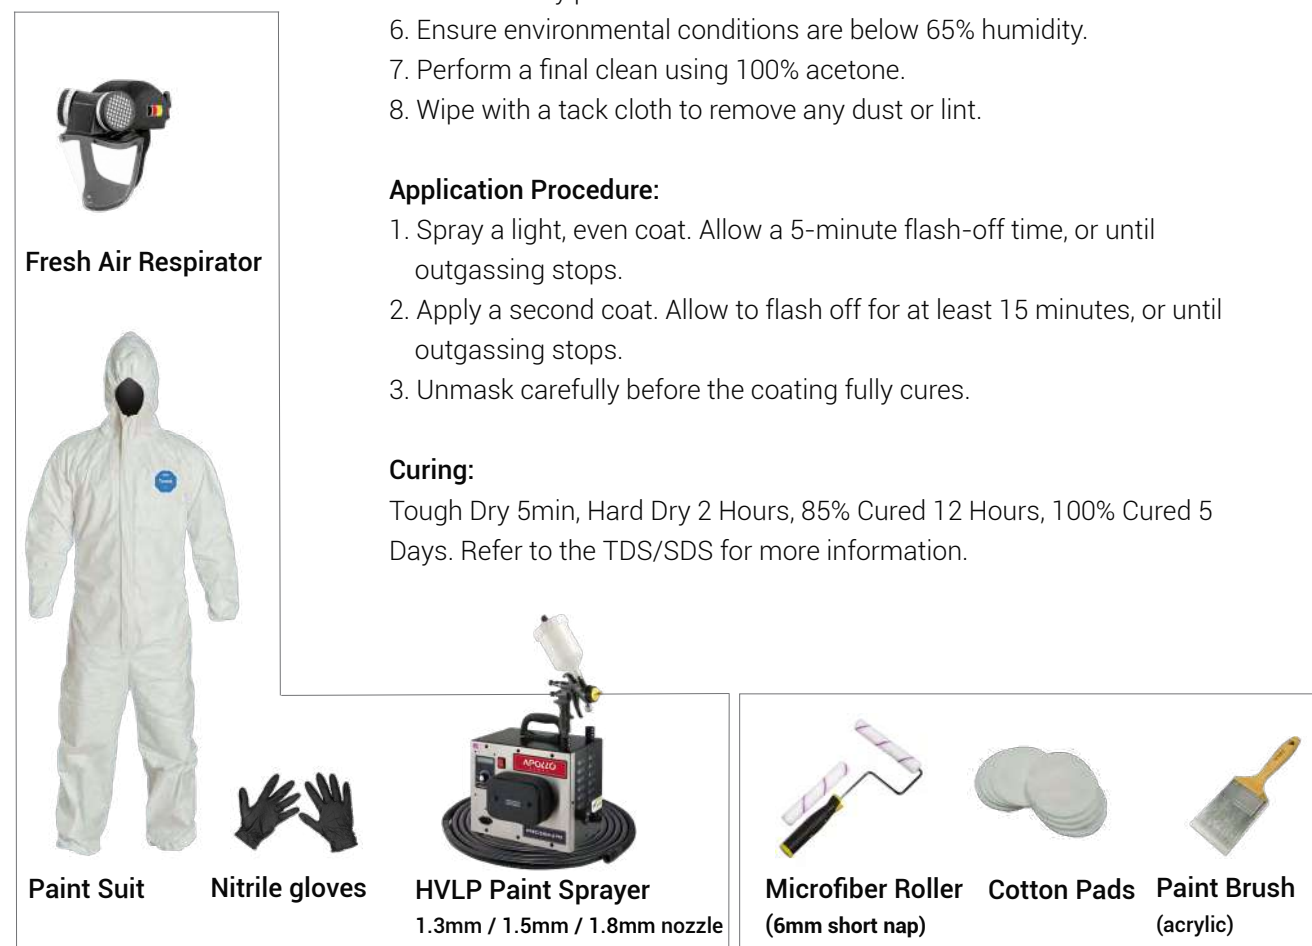

Instructions for use:

Protect or Renew; Marble, Granite, Varnished wood, HPL, PVC or Vinyl laminate and Melamine. Creates an easy-to-clean, anti-scratch surface that is resistant to UV Discoloration, HF (Hydrofluoric Acid), Hydro-chloric Acid, and Citric Acid.

Wipe Application; 1. Clean the surface 2. Sterilize the surface 3. Apply via the cotton pad an even layer 4. Let it cure.

Spray Application; Use an HVLP (High Volume Low Pressure) spray gun with 60-80% transfer efficiency. Fit the spray gun with a 1.0-1.3 mm fluid tip. Set air pressure to 20-30 psi.

Preparation Steps:

1. Stir the coating thoroughly for 30 seconds before use.
2. Prior to application, strain the mixed coating through a suitable paint filter (e.g., 190-250 µm) to ensure a clean, defect-free spray.
3. Wash and decontaminate the surface.
4. Wet sand / scuff using 1500-2000 grit sandpaper.
5. Mask off any parts not to be coated.
6. Ensure environmental conditions are below 65% humidity.
7. Perform a final clean using 100% acetone.
8. Wipe with a tack cloth to remove any dust or lint.

Application Procedure:

1. Spray a light, even coat. Allow a 5-minute flash-off time, or until outgassing stops.
2. Apply a second coat. Allow to flash off for at least 15 minutes, or until outgassing stops.
3. Unmask carefully before the coating fully cures.

Curing:

Tough Dry 5min, Hard Dry 2 Hours, 85% Cured 12 Hours, 100% Cured 5 Days. Refer to the TDS/SDS for more information.

How to use our Permanent Coating System:

These products can be stored for up to 24 months *(in a dry, temperature-stable dark environment)*


Processing Temperature:

Ambient temperature: 41-86°F
Avoid direct sunlight, Rain and /or high humidity.

IMPORTANT:

Before you use a NANO-CERAMIC product, please make sure you wear suitable protection gear. We always recommend using a paint suit, respirator mask and latex or nitrile gloves.

Outfit/Applicators:

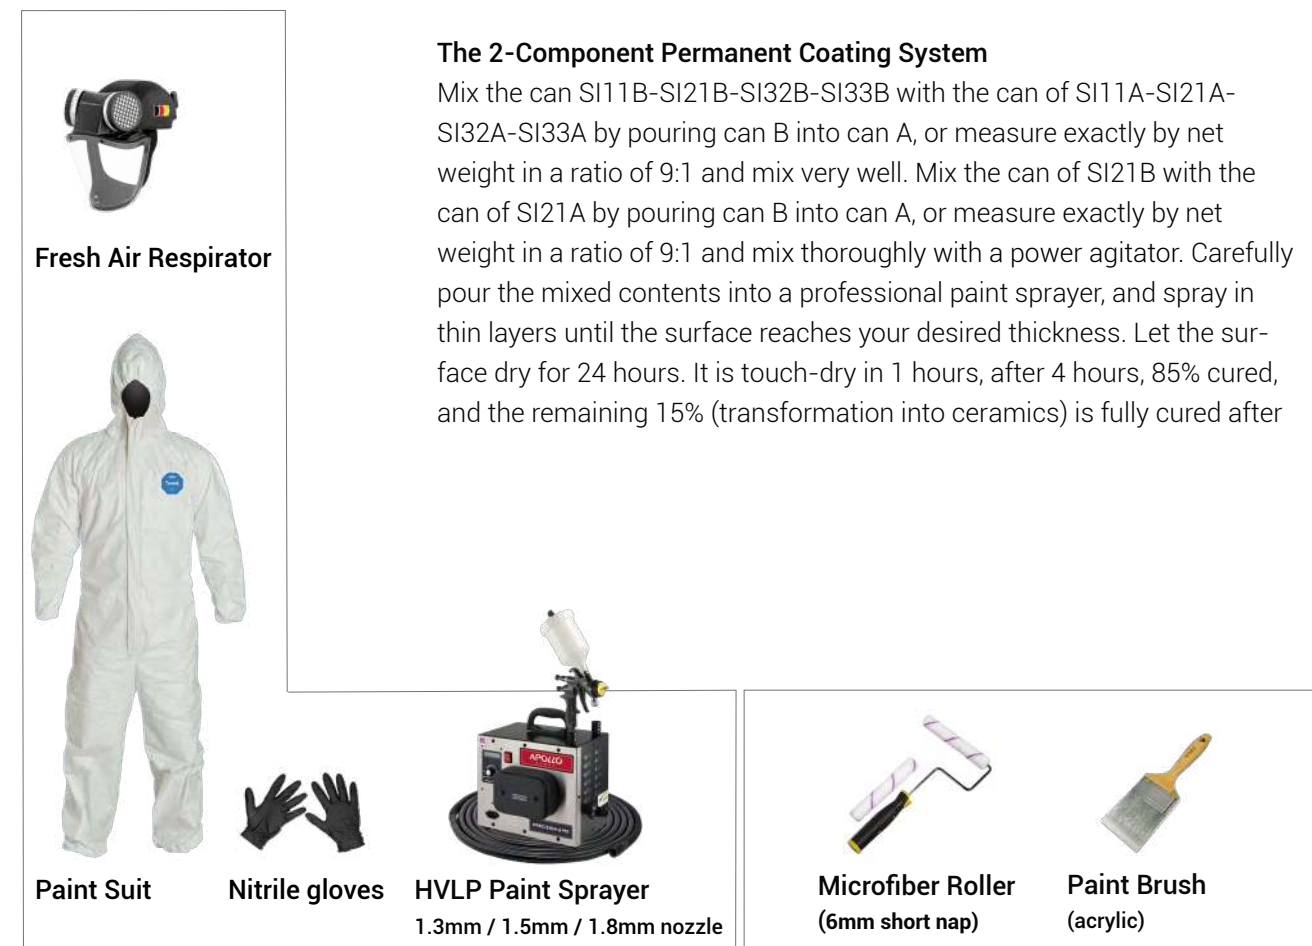

Application information

The SI11/SI12/SI21/SI22/SI31/SI33 coatings can be applied directly or indirectly on all surfaces (porous and non-porous) such as concrete, steel, wood, acrylic, gypsum, painted or unpainted surfaces, indoors, or outdoors. The surface underneath will be superbly protected against erosion and corrosion and will stay cleaner longer. Cleaning becomes quicker, easier, and less expensive, as special cleaning agents are unnecessary.

Preparation

Make sure the surface is free from any contamination and dirt. A zinc rich primer can be used in case of problems with the substrate. **Warning the surface must be completely dry before application and must stay dry for 6 hours after application after application!**

The 2-Component Permanent Coating System

Mix the can SI11B-SI12B-SI21B-SI22B-SI31B-SI33B with the can of SI11A-SI12A-SI21A-SI22A-SI31A-SI33A by pouring can B into can A, or measure exactly by net weight in a ratio of 7:3 and mix very well, or measure exactly by net weight in a ratio of 9:1 and mix thoroughly with a power agitator.

The 2-Component Permanent Coating System

Mix the can SI11B-SI21B-SI32B-SI33B with the can of SI11A-SI21A-SI32A-SI33A by pouring can B into can A, or measure exactly by net weight in a ratio of 9:1 and mix very well. Mix the can of SI21B with the can of SI21A by pouring can B into can A, or measure exactly by net weight in a ratio of 9:1 and mix thoroughly with a power agitator. Carefully pour the mixed contents into a professional paint sprayer, and spray in thin layers until the surface reaches your desired thickness. Let the surface dry for 24 hours. It is touch-dry in 1 hours, after 4 hours, 85% cured, and the remaining 15% (transformation into ceramics) is fully cured after

NANO-CERAMIC®

WWW.NANO-CERAMIC.COM THE NEXT GENERATION COATINGS



The Leader in Durability

Did you know?

*That our coatings are made
of pure silica sand, which is
the most common element
on Earth?*

Dealer