

# NANO-CERAMIC®

WWW.NANO-CERAMIC.COM INDUSTRIAL PROTECTIVE COATINGS



**Military/Navy** Permanent Coating Systems

## What makes NANO-CERAMIC Permanent Coating System so durable?

NANO-CERAMIC permanent coating system is the latest generation of protective coating which transforms paint into a hard ceramic, providing superior scratch resistance and near-permanent protection for all exterior or interior surfaces.


NANO-CERAMIC permanent coating system is 300°C resistant and more than 4 times stronger than traditional acrylic based paint finishes, and is effectively preventing damage that would otherwise affect the appearance and integrity of the original surface.

## Zero Maintenance for decades to come!

Our NANO-CERAMIC permanent coating is (non PFAS) rigorously tested by an independent testing laboratory according to the European standard for outdoor paints (EN 1504-2) please find the test report on our website.

## Can NANO-CERAMIC Permanent Coating System be applied on any surface?

The NANO-CERAMIC permanent coating system can be applied directly or indirectly on all kinds of interior and /or exterior surfaces (absorbing and non-absorbing), such as concrete, steel, wood, acrylic, gypsum and many more.

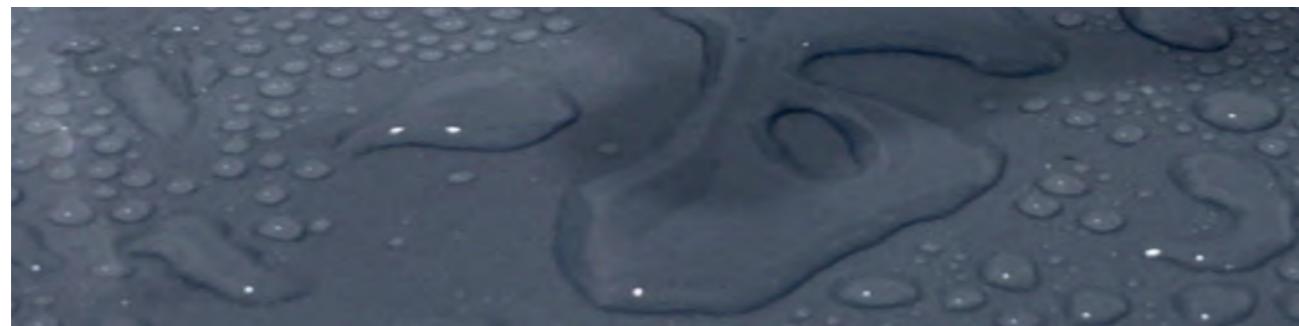

## Is NANO-CERAMIC Permanent Coating System self-cleaning?

NANO-CERAMIC permanent coating system provides a permanent hydrophobic surface that is self cleaning, easier to clean and stays cleaner longer as water and dirt can not penetrate the ceramic layer. NANO-CERAMIC permanent coating system is resistant to water vapor and water absorption.

## Can our hydrophobic coatings increase acceleration time and speed while simultaneously reducing fuel consumption?

Yes, the superhydrophobic surface has a good drag reduction effect, and the maximum drag reduction rate is up to 23.4%.



In a new analysis from IPTEK ITS 2023 concerning Drag Reduction, the following conclusions have been obtained. It was found that there was an increase in acceleration due to drag reduction on the ship model treated with a superhydrophobic coating, showing a 31% improvement compared to the non-coated surface and a 27% improvement compared to a conventionally anti-fouling coated surface.

As published in the International Journal of Marine Engineering Innovation and Research. Click [here](#) for the IPTEK analyses.

## Other paints are simply not suitable for longterm harsh outdoor environments.

In order to avoid poorly maintained properties (concrete rot, chipped and weathered paint, etc) for the next decades, our Permanent Coating System is simply the best solution to keep the value of your investment in place.

## Superior in Color & Gloss Retention

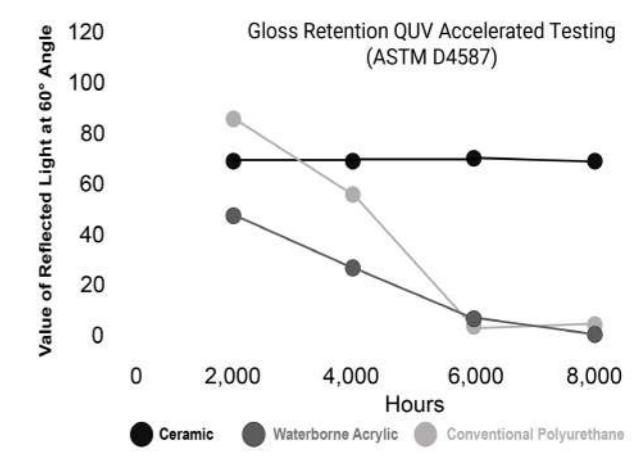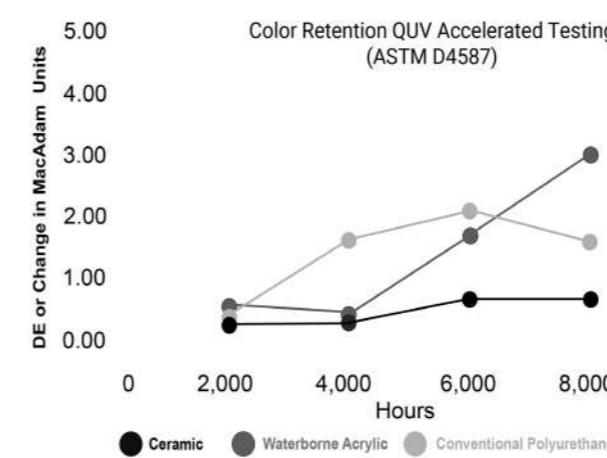

## A special selection of high grade tinting chemicals computerized dispersed in a superior ceramic resin.

Conventional gelcoats are a mixture with Epoxy or Polyurethane resins, of which the quality of resin and pigments are the most important factor in the ultimate strength. Most have a lifespan of 15 years, with hardness, color and gloss retention (sun fading) and manual mixing towards consistent quality being the most common problems in keeping the desired object at an aesthetically pleasing level.

## Quality Comparison of paints technologies


In case written in bold font it means existing shortcomings in quality.

Characteristics	Acrylic Latex walls ceilings	Acrylic walls floors	Epoxy floors	Polyurethane waterproofing	CERAMIC® all surfaces
Primer	<b>Yes</b>	<b>Yes</b>	<b>Yes</b>	<b>Yes</b>	No
Adhesion Strength	<b>Poor</b>	<b>Poor</b>	<b>Poor</b>	<b>Poor</b>	Excellent
Cross Cut Test	<b>Poor</b>	<b>Poor</b>	Good	<b>Poor</b>	Excellent
Abrasion Resistance	<b>Poor</b>	<b>Poor</b>	<b>Average</b>	<b>Poor</b>	Excellent
UV Radiation Resistance	<b>Average</b>	<b>Average</b>	<b>Poor</b>	Good	Excellent
Artificial Atmospheric Agents	<b>Poor</b>	<b>Poor</b>	Good	Good	Excellent
Colour Retention	<b>Average</b>	<b>Average</b>	<b>Poor</b>	<b>Poor</b>	Excellent
Gloss Retention	<b>Poor</b>	<b>Poor</b>	<b>Poor</b>	<b>Poor</b>	Excellent
Chemical Resistance	Good	Good	Good	<b>Poor</b>	Excellent
Severe Chemical Attack	<b>Poor</b>	<b>Poor</b>	<b>Average</b>	<b>Poor</b>	Excellent
Temperature Resistance	<b>60°C</b>	<b>91°C</b>	177°C	263°C	300°C
Thermal Shock Resistance	Good	Good	<b>Poor</b>	Good	Excellent
Carbon Dioxide Permeability	<b>Poor</b>	<b>Poor</b>	Good	<b>Poor</b>	Excellent
Permeability water vapour	<b>Average</b>	<b>Average</b>	Good	<b>Average</b>	Excellent
Water Absorption Rate	<b>5-15%</b>	<b>1%</b>	<b>2%</b>	<b>3%</b>	0%
Aging at 70°C	<b>Poor</b>	<b>Poor</b>	Good	<b>Average</b>	Excellent
Adhesion Strength Pull-off	<b>Poor</b>	<b>Average</b>	Good	<b>Poor</b>	Excellent
Impact Resistance	<b>Poor</b>	<b>Average</b>	Good	<b>Poor</b>	Excellent
Anti-Graffiti	<b>No</b>	<b>No</b>	<b>No</b>	<b>No</b>	Yes
Anti-Termite (Wood)	<b>No</b>	<b>No</b>	<b>No</b>	<b>No</b>	Yes
Hydrophobic Self Cleaning	<b>No</b>	<b>No</b>	<b>No</b>	<b>No</b>	Yes
Easy to Clean	<b>No</b>	<b>No</b>	<b>No</b>	<b>No</b>	Yes
Total Solar Reflectance (TSR)	<b>60</b> (white)	<b>60</b> (white)	60 (white)	<b>60</b> (white)	88 (white)
Expected Lifetime in Years	<7	<7	<5-15	<5-15	15-30+

## Ceramic Coating & Paint System

If you have a custom color, the dyeing machine automatically chooses between SI11 Transparent or SI21 Medium White

This ensures the highest quality of the final mix in combination with the most economical use of color pigments.

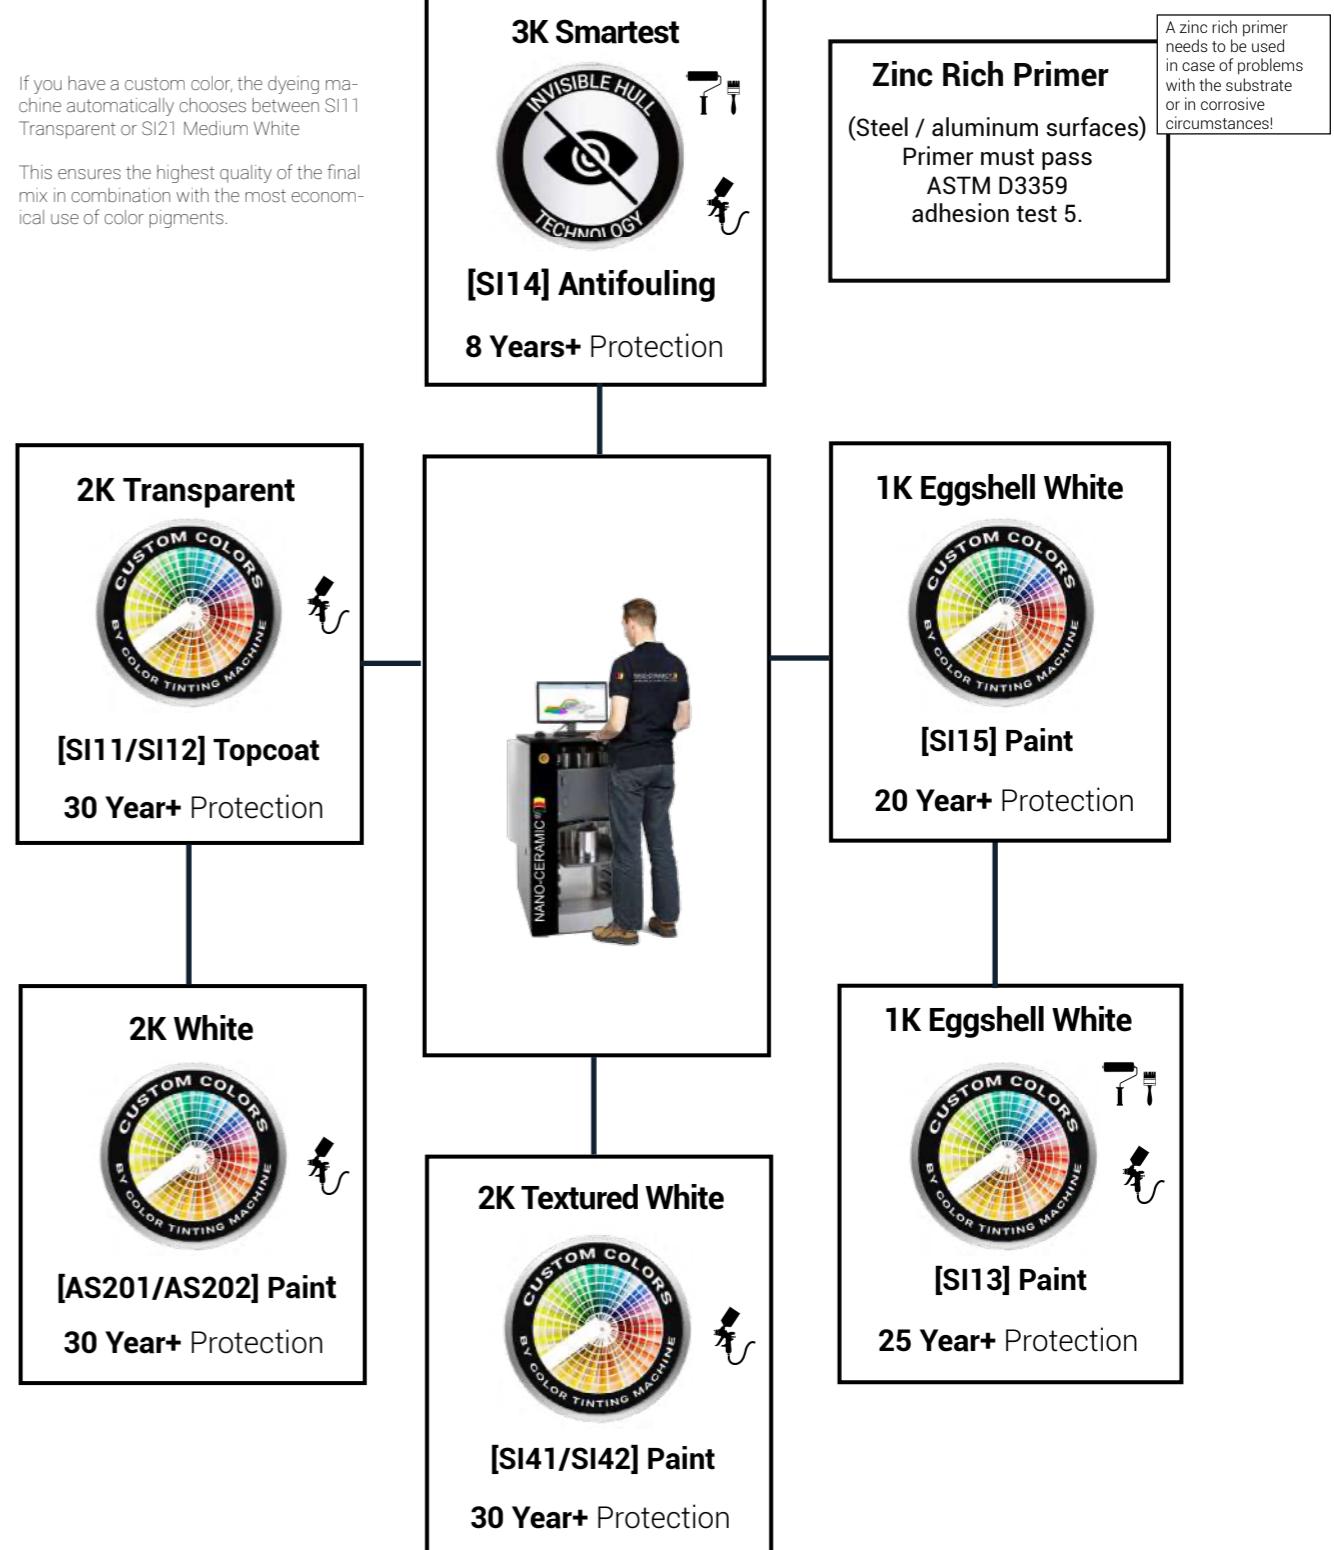

# SI11/SI12

2-Component (2K)


## Topcoat Transparent

for glossy or matte surfaces

<b>Article Nr</b>	: SI112000 2 L / 1.900 g Transparent Gloss SI122000 2 L / 2.000 g Transparent Matte
<b>Consumption</b>	: 3 layers +/- 270 g/m <sup>2</sup> - 285 ml/m <sup>2</sup> 75 micron = 7 m <sup>2</sup>
<b>Reachable area</b>	: 2 layers +/- 180 g/m <sup>2</sup> - 190 ml/m <sup>2</sup> 50 micron = 14 m <sup>2</sup>
	: 1 layers +/- 90 g/m <sup>2</sup> - 95 ml/m <sup>2</sup> 25 micron = 21 m <sup>2</sup>
<b>Hardness</b>	: H9
<b>Used for</b>	: The system can be applied directly or indirectly on all surfaces (porous and non-porous) such as concrete, steel, wood, acrylic, gypsum, painted or unpainted surfaces, indoors, or outdoors.
<b>Application area</b>	: Buildings, airports, offshore structures, bridges, tunnels, hotels, private housing, etc.



How to use: Page 38

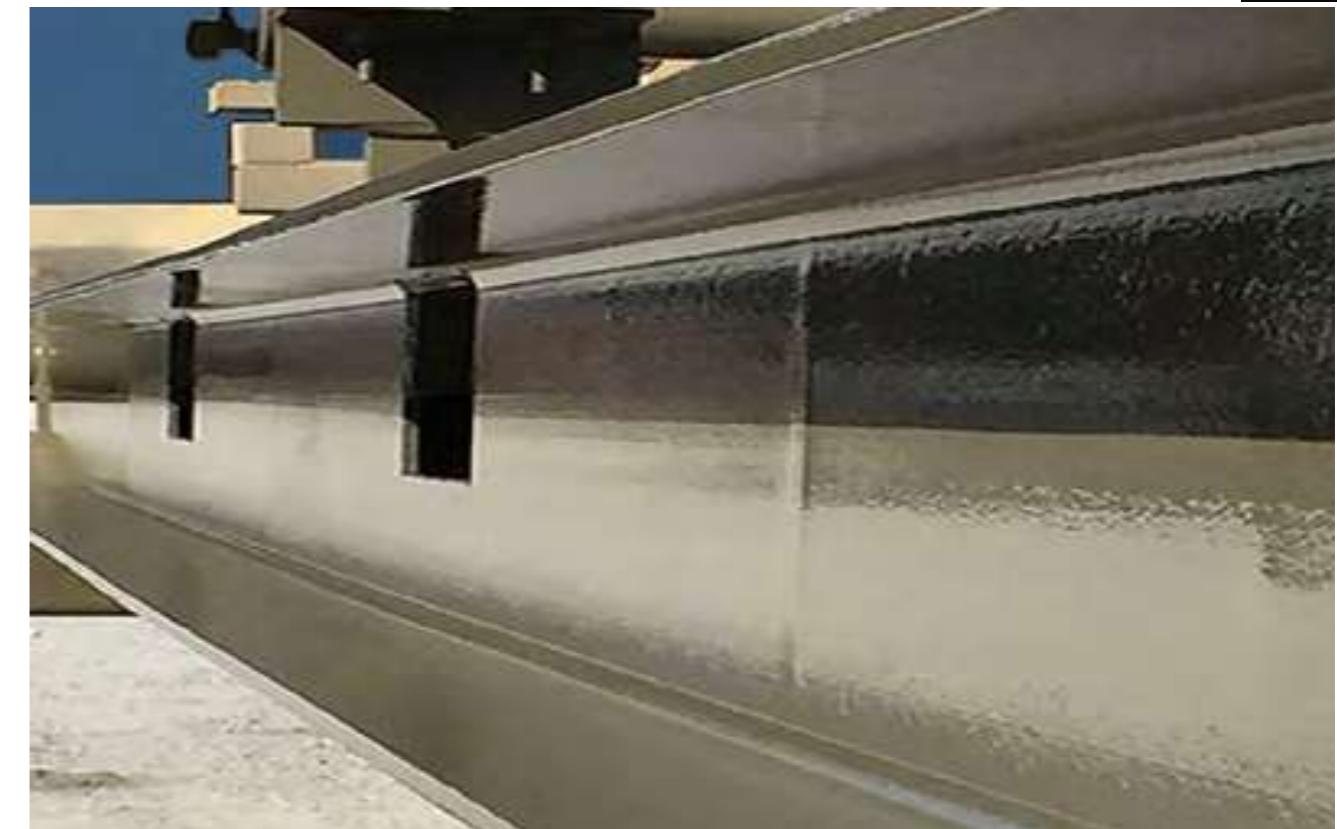

SI11/SI12 is an incredibly strong 2-component paint system which forms a durable matrix of molecular bonds (transformation to ceramic) resulting in permanent protection of the surface.

Three simple steps: Clean, Dry, and Apply.

- Easily repels water, dirt, dust, and pollutants.
- This coating is permanent hydrophobic
- Restores damaged finishes and reduces cleaning intervals.
- Resistant to all kinds of chemicals and UV radiation.
- Superior anti-pollution and anti-corrosion properties.
- This coating can withstand temperatures of 300°C. suitable for making walls fire retardant and is most best solution to make rooftops waterproof

Expected life duration up to 30 years+.

-  **Near-permanent**
-  **Anti-corrosion**
-  **Permanent hydrophobic**
-  **Anti-pollution**
-  **Anti-algae**
-  **UV protection**
-  **Self-cleaning**  
**Stays cleaner longer**
-  **Impact Resistance**  
**1kg / 80cm**
-  **Thermal Shock-Resistant**

## Permanent Hydrophobic - Self Cleaning



# SI21/SI22

2-Component (2K)

## Paint Strongest White

for glossy and satin surfaces

<b>Article Nr</b>	: SI210000 2 L / 2.400 g SI220000 2 L / 2.500 g
<b>Consumption</b>	: 3 layers +/- 200 gr/m <sup>2</sup> - 165 ml/m <sup>2</sup> 90 micron = 12m <sup>2</sup>
<b>Reachable area</b>	: 2 layers +/- 130 gr/m <sup>2</sup> - 110 ml/m <sup>2</sup> 60 micron = 16m <sup>2</sup> : 1 layer +/- 65 gr/m <sup>2</sup> - 55 ml/m <sup>2</sup> 30 micron = 24m <sup>2</sup>
<b>Hardness</b>	: H9
<b>Used for</b>	: The SI21 system can be applied directly or indirectly on all surfaces (porous and non-porous) such as concrete, steel, wood, acrylic, gypsum, painted or unpainted surfaces, indoors, or outdoors
<b>Application area</b>	: Buildings, airports, offshore structures, bridges, tunnels, ships, tanks, vehicles, etc.



How to use: Page 38



SI21/SI22 is an incredibly strong 2-component paint system which forms a durable matrix of molecular bonds (transformation to ceramic) resulting in permanent protection of the surface.

Three simple steps: Clean, Dry, and Apply.

- Easily repels water, dirt, dust, and pollutants.
- This coating is permanent hydrophobic.
- Restores damaged finishes and reduces cleaning intervals.
- Resistant to all kinds of chemicals and UV radiation.
- Superior anti-pollution and anti-corrosion properties.
- This coating can withstand temperatures of 300°C suitable for making walls fire retardant and to make rooftops waterproof

Expected life duration up to 30 years+

-  Near-permanent
-  Anti-corrosion
-  Permanent hydrophobic
-  Anti-pollution
-  Anti-algae
-  UV protection
-  Self-cleaning  
Stays cleaner longer
-  Impact Resistance  
1kg / 2lbs
-  Thermal Shock-Resistant



## SI31

2-Component (2K)

## Textured Transparent Semi Gloss

antislip - high impact resistant



Article Nr	: SI312000 2 L / 2.000 g
Consumption	: 3 layers +/- 222 g/m <sup>2</sup> - 222 ml/m <sup>2</sup> 90 micron = 9 m <sup>2</sup>
Reachable area	: 2 layers +/- 111 g/m <sup>2</sup> - 111 ml/m <sup>2</sup> 60 micron = 18 m <sup>2</sup>
	: 1 layer +/- 74 g/m <sup>2</sup> - 74 ml/m <sup>2</sup> 30 micron = 27 m <sup>2</sup>
Hardness	: H9
Used on	: Gelcoat, fiberglass, steel, aluminium, plastics, wood, virtually any surface.
Application area	: Buildings, marine, offshore structures, bridges, etc

How to use: Page 38

SI31 is a clear solvent-based ceramic coating, linked with a ceramic activator, available in semi-gloss and includes sprayable nano particles.

Known for its exceptional durability, this coating easily applies to any organic surface without needing a primer. Its textured design makes it perfect for anti-slip needs.


- Easily repels water, dirt, dust, and pollutants.
- This coating has an outstanding hydrophobic effect.
- Resistant to all kinds of chemicals and UV radiation.
- This coating can withstand temperatures of 300°C.
- Zero absorption, waterproof, insulation and heat rejecting

- Easy to apply  
Repaintable
- Cut maintenance
- Anti-water spot  
Anti-corrosion
- Permanent hydrophobic
- Self-cleaning  
stays cleaner longer
- Anti-scratch
- Visibility safety
- Protects your investment
- Impact Resistance  
1kg / 80cm
- Safes 10-20% on electricity

Expected life duration up to 30 years+



## Anti Slip - Noise Reduction

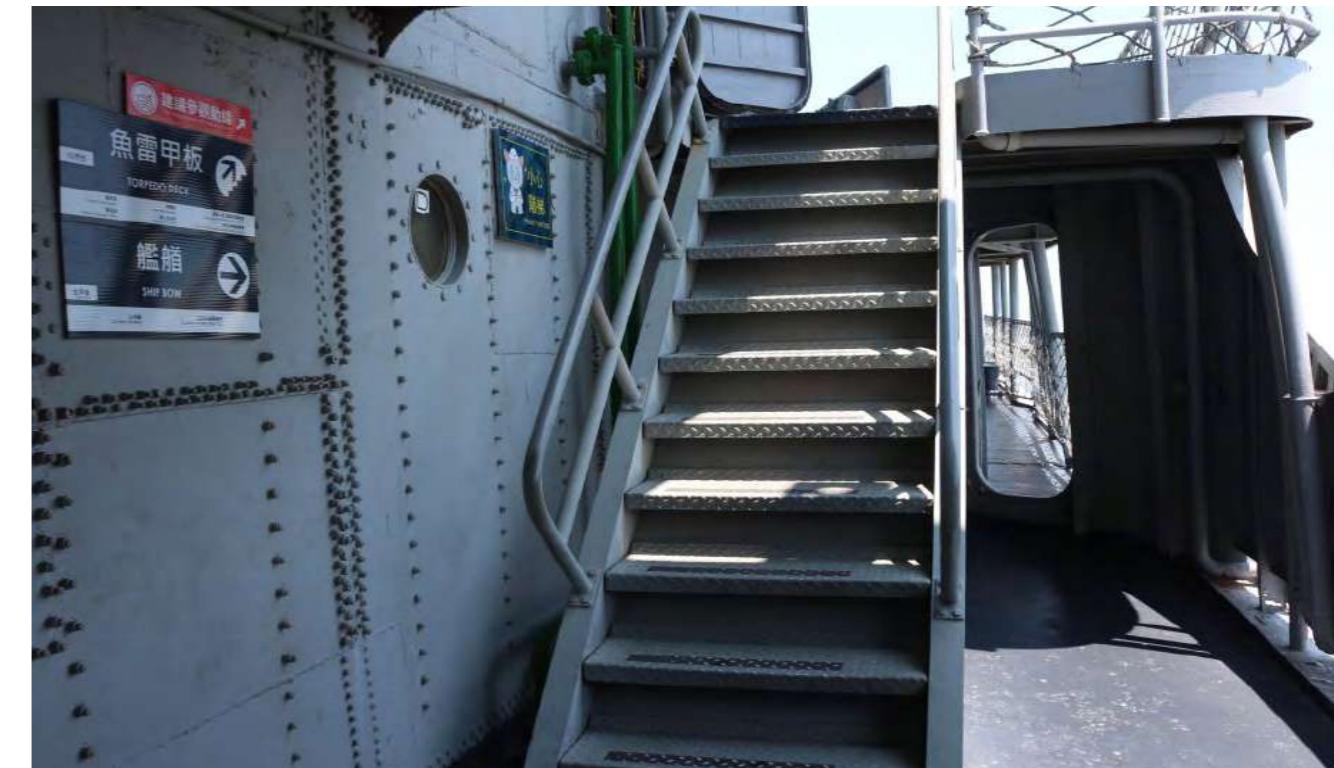

# SI14

3-Component (3K)

## The Smartest Antifouling

black/red/blue/grey

**Article Nr** : SI141000-BK-RD-BL-GR 1 L / 1.090 g  
 : SI144000-BK-RD-BL-GR 4 L / 4.300 g

**Consumption** : 2 layers 308 g/m<sup>2</sup> - 286 ml/m<sup>2</sup> = 200 micron / 14 m<sup>2</sup>

**Reachable area** : 1 layers 154 g/m<sup>2</sup> - 143 ml/m<sup>2</sup> = 100 micron / 28 m<sup>2</sup>

**Hardness** : H7

**Used for** : Gelcoat, fiberglass, steel, aluminium, plastics, wood

**Application area** : Marine Antifouling (humid environments)



How to use: Page 38

SI14 is a super strong strong and sleek 3-component antifouling system which forms a durable matrix of molecular bonds (transformation to ceramic) resulting in a superior protection of the surface.

The coating tricks microorganisms into perceiving plain water in front of them, rather than a ship's hull; as a result they often make no attempt to settle on the hull.

Due to a combination of hydrophobic silicone and hydrophilic polymers they can not longer clearly recognize the surface, nor distinguish the hull unambiguously from sea water.

Three simple steps: Clean, Dry, and Apply.

- Easily releases algea
- Super smooth self-polishing surface
- Organic Copper and Tin Non Biocidal releasel
- This coating has an outstanding hydrophobic effect.
- Resistant to all kinds of chemicals and UV radiation.
- This coating can withstand temperatures of 300°C

Expected life duration up to 8 year+

- Easy to apply**  
Repaintable
- Cut maintenance costs**
- Organic Copper and Tin**  
Non Biocidal
- Super Sleek Surface**  
Algea release <6knots
- Permanent**  
hydrophobic
- Self-cleaning**  
stays cleaner longer
- Save fuel**
- Impact Resistance**  
1kg / 2lbs
- Thermal Shock-Resistant**



## Super Smooth - Saves Fuel



# SI13

2-Component (2K)

## Paint Coolest White

for egg-shell surfaces



**Article Nr** : SI132000 2 L / 3.300 g White

**How to use:** Page 38

**Consumption** : 2 layers +/- 235 g/m<sup>2</sup> - 143 ml/m<sup>2</sup> 90 micron = 14 m<sup>2</sup>

**Reachable area** : 1 layer +/- 118 g/m<sup>2</sup> - 72 ml/m<sup>2</sup> 45 micron = 28 m<sup>2</sup>

**Hardness** : H7

**Used for** : The SI13 system can be applied directly or indirectly on all surfaces (porous and non-porous) such as concrete, steel, wood, acrylic, gypsum, painted or unpainted surfaces, walls, ceilings indoors, or outdoors

**Application area** : Buildings, offices airports, offshore structures, bridges, tunnels, hotels, private housing, etc.



SI13 is an incredibly strong 2-component paint system which forms a durable matrix of molecular bonds (transformation to ceramic) resulting in permanent protection of the surface.

Three simple steps: Clean, Dry, and Apply.

- Easily repels water, dirt, dust, and pollutants.
- This coating has an outstanding hydrophobic effect.
- Restores damaged finishes and reduces cleaning intervals.
- Resistant to all kinds of chemicals and UV radiation.
- Superior anti-pollution and anti-corrosion properties.
- This coating can withstand temperatures of 300°C suitable for making walls fire retardant and to make rooftops waterproof.

Expected life duration up to 25 year+

	<b>Near-permanent</b>
	<b>Anti-corrosion</b>
	<b>Permanent hydrophobic</b>
	<b>Anti-pollution</b>
	<b>Anti-algae</b>
	<b>UV protection</b>
	<b>Self-cleaning Stays cleaner longer</b>
	<b>Impact Resistance 1kg / 2lbs</b>
	<b>Thermal Shock-Resistant</b>

## Easy to clean - Egg-shell



# SI15

1-Component (1K)

## Paint Coolest White

for egg-shell surfaces



**Article Nr** : SI152000 2 L / 3.000 g White

**How to use:** Page 38

**Consumption** : 2 layers  $+/- 235 \text{ g/m}^2 - 143 \text{ ml/m}^2$  90 micron =  $14 \text{ m}^2$

**Reachable area** : 1 layer  $+/- 118 \text{ g/m}^2 - 72 \text{ ml/m}^2$  45 micron =  $28 \text{ m}^2$

**Hardness** : H6

**Used for** : The SI15 system can be applied directly or indirectly on all surfaces (porous and non-porous) such as concrete, steel, wood, acrylic, gypsum, painted or unpainted surfaces, walls, ceilings indoors, or outdoors

**Application area** : Buildings, offices airports, offshore structures, bridges, tunnels, hotels, private housing, etc.

SI15 is an incredibly strong 1-component paint system which forms a durable matrix of molecular bonds (transformation to ceramic) resulting in permanent protection of the surface.

Three simple steps: Clean, Dry, and Apply.

- Easily repels water, dirt, dust, and pollutants.
- This coating has an outstanding hydrophobic effect.
- Restores damaged finishes and reduces cleaning intervals.
- Resistant to all kinds of chemicals and UV radiation.
- Superior anti-pollution and anti-corrosion properties.
- This coating can withstand temperatures of 300°C suitable for making walls fire retardant and to make rooftops waterproof

Expected life duration up to 20 years+

	<b>Near-permanent</b>
	<b>Anti-corrosion</b>
	<b>Permanent hydrophobic</b>
	<b>Anti-pollution</b>
	<b>Anti-termite</b>
	<b>Anti-algae</b>
	<b>UV protection</b>
	<b>Self-cleaning Stays cleaner longer</b>
	<b>Thermal Shock-Resistant</b>



## Easy to clean - Egg-shell



## Color mixing has never been so easy!!!

X- SMART is the modular version of the acclaimed dispenser series, extremely cost-effective and easy to operate, with a low maintenance

This color mixer has a robust and tubeless design, built with a patented pump technology (to reduce waste) and identical features, making it a highly advanced dispenser, ideally suited to reduced capacity.



X-SMART  
Stabilizer plates

## 16 High Grade Coloring chemicals



Titanium White  
Masstone Tint 844-0061 4 L



Quinacridone Red  
Masstone Tint 844-0451 1 L



Scarlet Red  
Masstone Tint 844-0526 1 L



Lead Free Orange  
Masstone Tint 844-0982 1 L



Trans Red Oxide  
Masstone Tint 844-1054 1 L



Red Oxide  
Masstone Tint 844-1063 1 L



Burnt Umber  
Masstone Tint 844-1352 1 L



Trans Yellow Oxide  
Masstone Tint 844-1852 1 L



Yellow Oxide  
Masstone Tint 844-1863 1 L



Lead Free Med Yellow  
Masstone Tint 844-2555 1 L



Yellow  
Masstone Tint 844-2826 1 L



Organic Yellow  
Masstone Tint 844-2852 1 L



PHTHALO Green  
Masstone Tint 844-5558 1 L



Quinacridone Violet  
Masstone Tint 844-9451 1 L



Lamp Black  
Masstone Tint 844-9955 1 L



PHTHALO BLUE  
Masstone Tint 844-7262 1 L

## Color card

Residential		
SI13 White Egg-Shell (Flat Finish) 15/25 (20/60°)	SI41 Textured White Semi Gloss 41/69 (20/60°)	
SI15 White Egg Shell (Flat Finish) 18/28 (20/60°)	SI42 Textured White Matte 11/21 (20/60°)	
SI21 White Gloss 49/77 (20/60°)		
SI22 White Satin 33/59 (20/60°)		
Original	RAL 9018	RAL 3015
Cool white	Papyrus white	Light pink
RAL 9001	RAL 9022	RAL 5007
Cream white	Pearl light grey	Pastel blue
RAL 9002	RAL 9023	RAL 4009
Grey white	Pearl dark grey	Pastel violet
RAL 9003	RAL 1000	RAL 6027
Signal white	Green beige	Light green
RAL 9004	RAL 1001	RAL 7000
Signal black	Beige	Squirrel grey
RAL 9005	RAL 1002	RAL 1036
Jet black	Sand yellow	Pearl gold
RAL 9006	RAL 1011	RAL 8029
White aluminium	Brownbeige	Pearl copper
RAL 9007	RAL 1013	RAL 4012
Grey aluminium	Pearl white	Pearl blackberry
RAL 9010	RAL 1014	RAL 5025
Pure white	Ivory	Pearl gentian blue
RAL 9011	RAL 1015	RAL 6036
Graphite black	Light ivory	Pearl opal green
RAL 9016	RAL 9017	MAHOGANY braun

## Wood

SI11 Transparent Gloss 51/78 (20/60°)  
SI12 Transparent Matte 11/21 (20/60°)



SI11 Transparent



SI11 Light



SI11 Nut



SI11 Colonial

## Industrial

SI11 Transparent Gloss 51/78 (20/60°)  
SI21 White Gloss 49/77 (20/60°)  
SI22 White Satin 33/59 (20/60°)



Transparent



Luminous yellow



Traffic red



Jet black



Golden yellow [Cat]



Leaf green [J.D Deere]



Light grey



Dark grey



Silver grey



Signal brown



Pale brown

## Other colors need minimal 100 kg

### Marine

SI12 Transparent Matte 11/21 (20/60°)  
SI1 Textured White Semi Gloss 41/69 (20/60°)  
SI33 Textured Black Semi Gloss 41/69 (20/60°)  
SI42 Textured White Matte 11/21 (20/60°)

Original



Cool white



Pure white



Cream white



Distant blue



Traffic yellow



Turquoise bleu



Silver gray



Light grey



Light ivory



Pure white



Cream



Beige



Olive yellow



### Military

SI13 Textured Transparent Semi Gloss 41/69 (20/60°)  
SI33 Textured Black Semi Gloss 41/69 (20/60°)

Original



Fire red



Transparent matte



Burgundy



Blue grey



Jet black



NATO green



Graphite grey



[RAF] Blue grey



Desert sand



Light green



Violet blue



Light blue



Dark grey camo



### Antifouling

SI14 Color 31/41 (20/60°)




Transparent



Signal Red



Ultra marine blue



Signal Grey

## What is NANO-CERAMIC UVA Topcoat?

NANO-CERAMIC® UVA Topcoat is a revolutionary low-VOC, non-PFAS, self-leveling protective coating system that forms an ultra-hard, glass-like hydrophobic barrier—ideal for high-performance marine environments.

Specifically engineered for extreme durability and a sleek, high-gloss finish, UVA Topcoat delivers exceptional resistance to saltwater, intense UV exposure, biofouling, and harsh marine chemicals like hydrofluoric acid (HF), hydrochloric acid, and citric acid—all while remaining completely safe and compliant for onboard use (Food contact safe).

Powered by advanced nanotechnology, UVA Topcoat extends the lifespan of marine surfaces by protecting polyester, epoxy, polyurethane, and acrylic resins steel, aluminum, composites, and wood from corrosion, surface breakdown, and environmental wear.—making it an exceptionally versatile solution for virtually any surface.

## Why UVA Topcoat is a Game-Changer in Marine Protection?

For decades, protective coatings like epoxy, polyurethane (PU), and acrylic have been the industry standard. However, they all share a critical weakness—UV degradation. Prolonged exposure to sunlight causes these coatings to yellow, crack, and deteriorate, leading to costly maintenance and premature failures.

## Where can UVA Topcoat be applied in Marine use?

UVA Topcoat is highly versatile and suitable for a wide range of marine applications:


- Yachts & Boats – Hulls, decks, topsides, and superstructures
- Speedboats – UV protection and ultra-slick finish for high-performance watercraft
- Marine Infrastructure – Docks, piers, pontoons, and submerged structures
- Ship Interiors – Tables, countertops, cabins, walls, and decorative panels
- Commercial Vessels – Outer hulls, ballast tanks, walkways, and engine rooms
- Antifouling Protection – Ideal for vessels in constant motion or those stored on land

Compatible with both new builds and retrofits, UVA Topcoat adapts to various marine substrates and operating conditions with ease.

## Can our hydrophobic coatings boost speed and cut fuel use?

Yes—our superhydrophobic sleek surface reduces drag by up to 23.4%, leading to 31% faster acceleration compared to uncoated surfaces and 27% faster than conventional antifouling coatings (Source: IPTEK ITS, 2023).

## How it Works

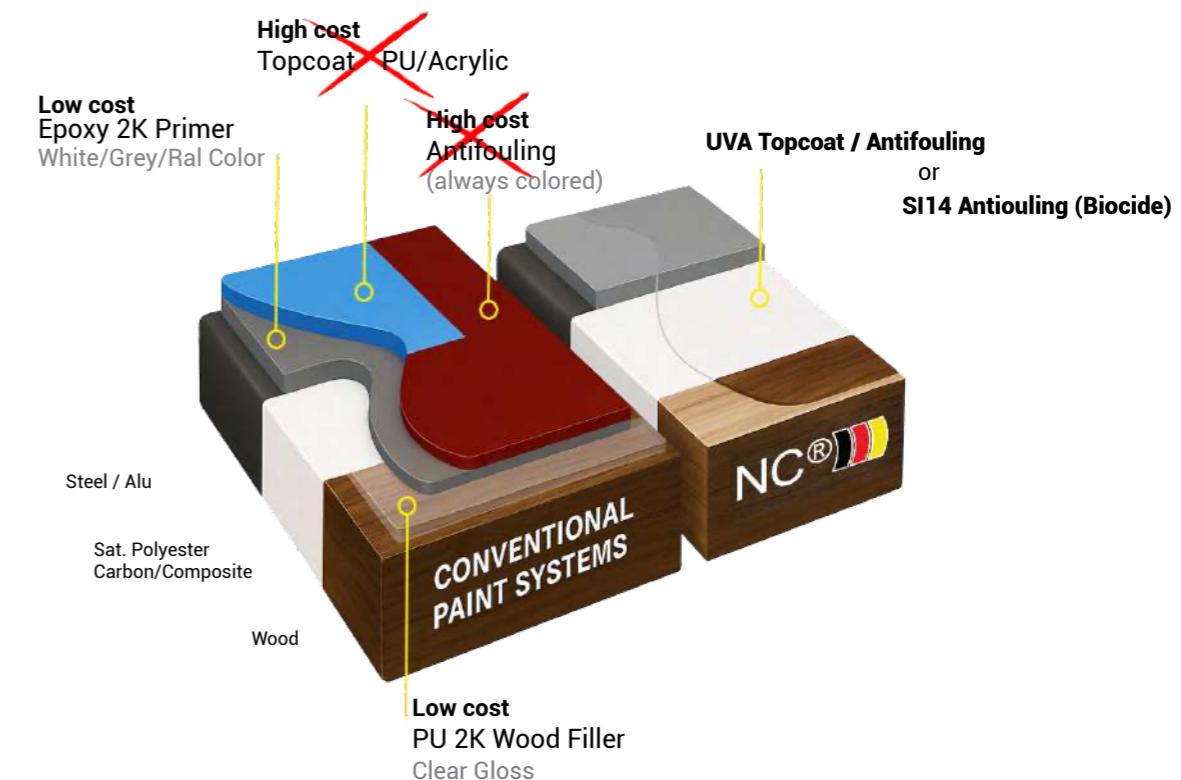

## Superior Performance at the Lowest Cost.

UVA Topcoat isn't just another coating—it's a next-generation solution that replaces complex and expensive multi-layer systems with a single, high-performance layer.

By applying directly over low-cost primers, UVA Topcoat eliminates the need for expensive finishing coats. Its smart chemistry and simplified process make traditional topcoat systems outdated by comparison.

Whether for industrial, marine, infrastructure, or decorative use, UVA Topcoat simplifies your process and multiplies your value—proving that true performance doesn't have to come at a high price.

## Freedom in Protection Years

Long-Lasting Protection, Layer by Layer

A single 6  $\mu\text{m}$  (micron) layer applied using HVLP spray technology can provide up to 8 years of protection. Need more durability? Just add more layers—it's that simple.

Apply wet-on-wet: once the first coat flashes off (dry to the touch but still tacky), you can immediately apply the next. This method prevents trapped gases and creates a seamless, chemical-resistant film with hydrophobic properties—making surfaces easier to clean and maintain.

## Coverage & Application Efficiency

UVA Topcoat is engineered for maximum efficiency with minimal material use—delivering high-performance protection at a fraction of the volume required by traditional coatings.

Recommended usage is approximately  $\pm 12.5 \text{ g/m}^2$  per layer (by wipe or spray), resulting in a film thickness of around 6 microns, with one liter covering up to 80  $\text{m}^2$ .




## Color Tinting Option for Marine Applications

For customized aesthetics, UVA Topcoat can be tinted using our colorants on page 22-23. These high-performance, solvent-free pigments provide long-lasting color stability and UV resistance—perfect for marine environments where both protection and appearance matter. Ideal for yachts, decks, interiors, or any visible surface requiring a durable, colored finish without compromising the coating's hydrophobic and chemical-resistant properties.

## Quality Comparison of paints technologies

In case written in bold font it means existing shortcomings in quality.

Characteristics	Acrylic Latex walls ceilings	Acrylic walls floors	Epoxy floors	Polyurethane waterproofing	UVA Topc all surfaces
Primer	<b>Yes</b>	<b>Yes</b>	<b>Yes</b>	<b>Yes</b>	No
Adhesion Strength	<b>Poor</b>	<b>Poor</b>	<b>Poor</b>	<b>Poor</b>	Excellent
Cross Cut Test	<b>Poor</b>	<b>Poor</b>	Good	<b>Poor</b>	Excellent
Abrasion Resistance	<b>Poor</b>	<b>Poor</b>	<b>Average</b>	<b>Poor</b>	Excellent
UV Radiation Resistance	<b>Average</b>	<b>Average</b>	<b>Poor</b>	Good	Excellent
Artificial Atmospheric Agents	<b>Poor</b>	<b>Poor</b>	Good	Good	Excellent
Colour Retention	<b>Average</b>	<b>Average</b>	<b>Poor</b>	<b>Poor</b>	Excellent
Gloss Retention	<b>Poor</b>	<b>Poor</b>	<b>Poor</b>	<b>Poor</b>	Excellent
Chemical Resistance	Good	Good	Good	<b>Poor</b>	Excellent
Severe Chemical Attack	<b>Poor</b>	<b>Poor</b>	<b>Average</b>	<b>Poor</b>	Excellent
Temperature Resistance	<b>60°C</b>	<b>91°C</b>	177°C	263°C	300°C
Thermal Shock Resistance	Good	Good	<b>Poor</b>	Good	Excellent
Carbon Dioxide Permeability	<b>Poor</b>	<b>Poor</b>	Good	<b>Poor</b>	Excellent
Permeability water vapour	<b>Average</b>	<b>Average</b>	Good	<b>Average</b>	Excellent
Water Absorption Rate	<b>5-15%</b>	1%	<b>2%</b>	3%	0%
Aging at 70°C	<b>Poor</b>	<b>Poor</b>	Good	<b>Average</b>	Excellent
Adhesion Strength Pull-off	<b>Poor</b>	<b>Average</b>	Good	<b>Poor</b>	Excellent
Impact Resistance	<b>Poor</b>	<b>Average</b>	Good	<b>Poor</b>	Excellent
Anti-Graffiti	<b>No</b>	<b>No</b>	<b>No</b>	<b>No</b>	Yes
Anti-Termite (Wood)	<b>No</b>	<b>No</b>	<b>No</b>	<b>No</b>	Yes
Hydrophobic Self Cleaning	<b>No</b>	<b>No</b>	<b>No</b>	<b>No</b>	Yes
Easy to Clean	<b>No</b>	<b>No</b>	<b>No</b>	<b>No</b>	Yes
Total Solar Reflectance (TSR)	<b>60</b> (white)	<b>60</b> (white)	60 (white)	<b>60</b> (white)	88 (white)
Expected Lifetime in Years	<7	<7	<5-15	<5-15	8/16/24

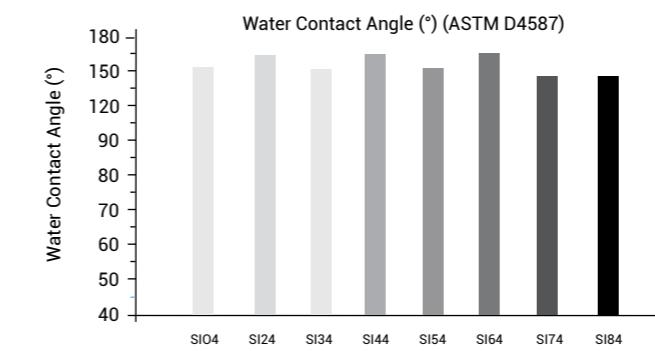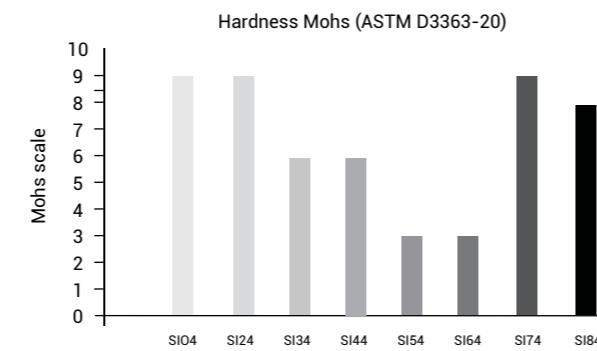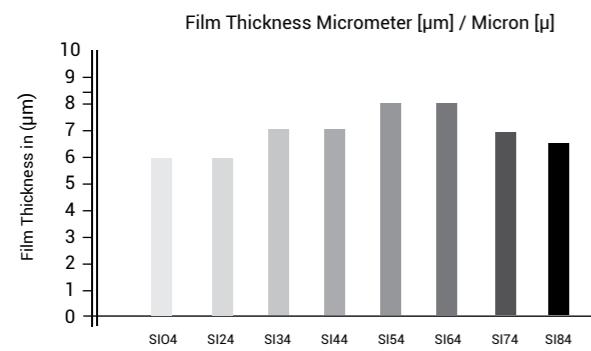

# S104

1-Component (1K)

## H9 UVA Topcoat Transparent

for glossy surfaces

Article Nr	: S1041LUVA 1 L / 920 g S10405UVA 500 ml / 460 g
Consumption	: 3 layers +/- 34.6 g/m <sup>2</sup> - 37.5 ml/m <sup>2</sup> 18 micron = 20 m <sup>2</sup>
Reachable area	: 2 layers +/- 23.0 g/m <sup>2</sup> - 25.0 ml/m <sup>2</sup> 12 micron = 40 m <sup>2</sup>
	: 1 layer +/- 11.5 g/m <sup>2</sup> - 12.5 ml/m <sup>2</sup> 6 micron = 80 m <sup>2</sup>
Hardness/Cupping	: H9 / Flexibility ISO 1520 >21mm
Used for	: Fiberglass, steel, aluminium, plastics, wood
Application field	: Marine, exteriors, antifouling, interiors

S104 is an incredibly strong 1-component high performance coating and paint system which forms a durable matrix of molecular bonds (transformation to ceramic) resulting in permanent protection of the surface.

Three simple steps: Clean, Dry, and Apply.

- Easily repels water, dirt, dust, and pollutants
- On the ship's hull, for higher speed and lower fuel use.
- This coating is permanent hydrophobic
- Restores damaged finishes and reduces cleaning intervals.
- Resistant to all kinds of chemicals and UV radiation.
- Superior anti-pollution and anti-corrosion properties.
- This coating can withstand temperatures of 300°C
- Superb adhesion even on glass or stainless steel.
- Can be sprayed multilayered.
- Transparent, Opaque, solid-color or vibrant, transparent color finishes.



Expected life duration 8-16 or 24 Years (layer thickness)



How to use: Page 39



How does it look visually?

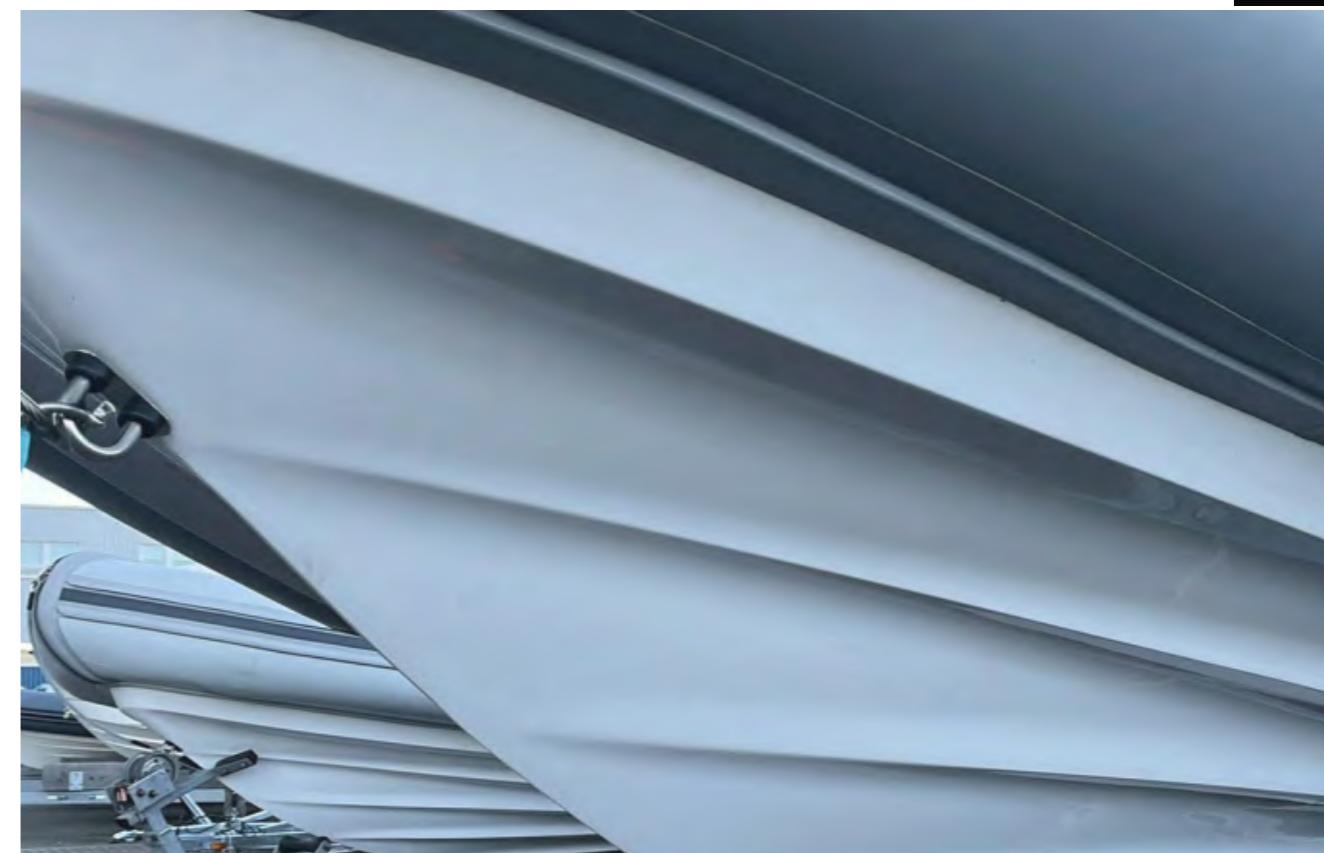

## Higher Speeds - Fuel Saving



- Save fuel  
Higher speeds
- Near-permanent
- Anti-corrosion
- Permanent hydrophobic
- Anti-pollution
- Anti-algae
- UV protection
- Self-cleaning  
Stays cleaner longer
- Impact Resistance  
1kg / 80cm
- Thermal Shock-Resistant

# SI24 1-Component (1K)

## H9 UVA Topcoat Transparent for matte surfaces



Article Nr	: SI241LUVA 1 L / 920 g SI2405UVA 500 ml / 460 g
Consumption	: 3 layers +/- 34.6 g/m <sup>2</sup> - 37.5 ml/m <sup>2</sup> 18 micron = 20 m <sup>2</sup>
Reachable area	: 2 layers +/- 23.0 g/m <sup>2</sup> - 25.0 ml/m <sup>2</sup> 12 micron = 40 m <sup>2</sup>
	: 1 layer +/- 11.5 g/m <sup>2</sup> - 12.5 ml/m <sup>2</sup> 6 micron = 80 m <sup>2</sup>
Hardness/Cupping	: H9 / Flexibility ISO 1520 >21mm
Used for	: Fiberglass, steel, aluminium, plastics, wood
Application field	: Marine, exteriors, antifouling, interiors

SI04 is an incredibly strong 1-component high performance coating and paint system which forms a durable matrix of molecular bonds (transformation to ceramic) resulting in permanent protection of the surface.

Three simple steps: Clean, Dry, and Apply.


- Easily repels water, dirt, dust, and pollutants
- On the ship's hull, for higher speed and lower fuel use.
- This coating is permanent hydrophobic
- Restores damaged finishes and reduces cleaning intervals.
- Resistant to all kinds of chemicals and UV radiation.
- Superior anti-pollution and anti-corrosion properties.
- This coating can withstand temperatures of 300°C
- Superb adhesion even on glass or stainless steel.
- Can be sprayed multilayered.
- Transparent, Opaque, solid-color or vibrant, transparent color finishes.

Expected life duration 8-16 or 24 Years (layer thickness)

How to use: Page 39



How does it look visually?



- Save fuel  
Higher speeds
- Near-permanent
- Anti-corrosion
- Permanent hydrophobic
- Anti-pollution
- Anti-algae
- UV protection
- Self-cleaning  
Stays cleaner longer
- Impact Resistance  
1kg / 80cm
- Thermal Shock-Resistant



## Anti Scratch - UV Resistant



## Marine-Grade Color Protection – Super Transparent

For boats where weight, speed, and durability matter, our advanced hybrid coating system offers a breakthrough: vibrant transparent tints or metallic finishes without sacrificing performance. By blending NANO-CERAMIC® Super Transparent Colorants into our UVA Topcoat, you get:

Ultra-thin coating (<12 microns) = minimal weight

H9 surface hardness = max scratch resistance

Hydrophobic & anti-fouling = fast cleaning, less drag

UV & salt resistant = marine-grade longevity

Clear or colored: keep visibility through glass or plexi

Optional metallic effect for custom marine finishes

Perfect for:

Plexiglass hatches & windscreens

Cabin glass, partitions, skylights

Carbon fiber panels & consoles

Stainless/aluminum trims & detailing



**TRANSOXIDE RED A-G 130**  
Masstone 77491-1  
Tint 100 ml



**TR.OXIDE YELLOW A-2R 130**  
Masstone 77492-1  
Tint 100 ml



**YELLOW A-F2G 100**  
Masstone 11785  
Tint 11785 100 ml



**YELLOW A-H3G 100**  
Masstone 11781  
Tint 11781 100 ml



**YELLOW A-HRD 100**  
Masstone 21108  
Tint 21108 100 ml



**ORANGE A-HLD 100**  
Masstone 11780  
Tint 11780 100 ml



**YELLOW A-N4G 100-ST**  
Masstone 279376  
Tint 100 ml



**RED A-P2Y 100-ST**  
Masstone 289404  
Tint 100 ml



**PINK A-EB 100-ST**  
Masstone 287516  
Tint 100 ml



**BLUE A-BTR 100-ST**  
Masstone 290247  
Tint 100 ml



**BLUE A-BG 100**  
Masstone 74160  
Tint 100 ml



**GREEN A-GNX 130**  
Masstone 74260  
Tint 100 ml



**BLACK A-N 100**  
Masstone 77266  
Tint 100 ml



**OXIDE YELLOW A-BV 100**  
Masstone 771740  
Tint 100 ml



**BLUE A-BTG 100-ST**  
Masstone 275536  
Tint 100 ml



**GREEN A-GBX 100-ST**  
Masstone 323291  
Tint 100 ml



**BLACK A-NB 100-ST**  
Masstone 289518  
Tint 100 ml



**BLACK A-NY 100-ST**  
Masstone 272060  
Tint 100 ml



**OXIDE YELLOW A-CR 100**  
Masstone 77310  
Tint 100 ml



**OXIDE YELLOW A-R 100**  
Masstone 77492  
Tint 100 ml



**OXIDE RED A-B 100**  
Masstone 77491  
Tint 100 ml



**WHITE A-R 100**  
Masstone 77891  
Tint 100 ml

## Lightweight, Ultra-Hard, Built for Speed. Opaque Ral

This coating system enhances both performance and aesthetics – making boats faster, cleaner, and more refined.

# SIX1

2-Component (2K)

## Primer Epoxy Polyamide

heavy duty - anti-corrosion



**Article Nr** : SIX11250-WH/GR 1.25 L / 1.45 kg SIX15000-WH-GR 5 L / 5.8 kg

**Consumption** : 2 layers +/- 240 g/m<sup>2</sup> - 250 ml/m<sup>2</sup> 80 micron = 5 m<sup>2</sup>

**Reachable area** : 1 layer +/- 120 g/m<sup>2</sup> - 125 ml/m<sup>2</sup> 40 micron = 10 m<sup>2</sup>

**Hardness** : H5

**Colors** : White, Grey or RAL (RAL Minimum Order 250 pcs 5 L)

**Used on** : Concrete, Steel, Aluminium, Fiberglass and other organic surfaces

**Application area** : Buildings, marine, airports, offshore structures, bridges



**Fast Repaintable**



**Excellent adhesion**

SIX1 is a solvent based epoxy polyamide primer. This primer is used for corrosion protection on concrete, stainless, galvanized, carbon and alloy steel, aluminum in corrosive conditions and has excellent adhesion to all organic substrates and to all of our ceramic topcoats. The primer can be applied at a relative humidity of 40-80% and can be painted over within 8 hours 30°C, 1 hours 60°.



# SIX2

2-Component (2K)

## Primer Surfacer Acrylic Alkyd

smooth - surface modifier



**Article Nr** : SIX21250-WH/GR 1.25 L / 1.45 kg SIX25000-WH/GR 5 L / 5.8 kg

**Consumption** : 2 layers +/- 200 g/m<sup>2</sup> - 210 ml/m<sup>2</sup> 60 micron = 6 m<sup>2</sup>

**Reachable area** : 1 layer +/- 100 g/m<sup>2</sup> - 105 ml/m<sup>2</sup> 30 micron = 12 m<sup>2</sup>

**Hardness** : H3

**Colors** : White, Grey

**Used on** : Steel, aluminium, wood, fiberglass, and old paint systems.

**Application area** : Buildings, hotels, private housing, etc.



**Fast Repaintable**



**Excellent adhesion**

SIX2 High-quality 2K surfacer (two-component basecoat) for auto-refinish, marine, and industrial coating applications where a smooth surface is required. The primer has excellent adhesion to all organic substrates and to all of our ceramic topcoats. The primer can be applied at a relative humidity of 30-80% and can be painted over within 4 hours 30°C, 1 hours 60°.



## Heavy Duty Primer - Smooth Surfacer

# SIX3

2-Component (2K)

## Primer PU Wood Filler

surface modifier - absorbtion reducer

Article Nr	: SIX31500 1.5 L / 1.4 kg
Consumption	: 2 layers +/- 175 g/m <sup>2</sup> - 185ml/m <sup>2</sup> 60 micron = 8 m <sup>2</sup>
Reachable area	: 1 layer +/- 115 g/m <sup>2</sup> - 95ml/m <sup>2</sup> 30 micron = 12 m <sup>2</sup>
Hardness	: H4
Colors	: Transparent
Used on	: Wood, Natural Stone, and other organic surfaces
Application area	: Buildings, marine, hotels, private housing, etc.

SIX3 is a solvent borne transparent wood filler. This primer is used as surface modification for, wood or natural stone to reduce capillary absorption and has an excellent adhesion to all organic substrates and towards one of our ceramic top coats. The primer can be applied at a relative humidity of 40-80%.



Fast Repaintable



Excellent adhesion



# SIX4

1-Component (1K)

## Primer Acrylic Waterbased

all surfaces modifier

Article Nr	: SIX41000-WH/GR 1L / 1.2kg SIX44000-WH/GR 4L / 4.8kg
Consumption	: 2 layers +/- 240 g/m <sup>2</sup> - 200 ml/m <sup>2</sup> 60 micron = 5 m <sup>2</sup>
Reachable area	: 1 layer +/- 120 g/m <sup>2</sup> - 100 ml/m <sup>2</sup> 30 micron = 10 m <sup>2</sup>
Hardness	: H3
Colors	: White, Grey or RAL (RAL Minimum Order 250 pcs 4 L)
Used on	: Concrete, wood, drywalls and old waterbased paints
Application area	: Buildings, walls and ceilings indoor or outdoor

SIX4 Acrylic Water-Based Primer is a premium, all-purpose primer-sealer with excellent adhesion, stain-blocking, and hiding power. Ideal for both interior and exterior surfaces, it bonds to glossy surfaces without sanding, effectively blocks stains, and provides a smooth foundation for any solvent-based or water-based topcoat.



Fast Repaintable



Excellent adhesion



VOC Free



# SIX5

2-Component (2K)

## Putty Polyester

ultra smooth - sandable

Article Nr	: SIX51000-WH/GR 1 kg
Colors	: White, Grey
Used on	: Metal, wood, fiberglass, concrete, plastics
Application area	: Buildings, marine, airports, offshore structures, bridges, private housing, etc.

SIX5 is a High quality 2 (two) component Epoxy base putty for auto-refinish, marine and industrial coating applications.



- Fast Repaintable
- Excellent adhesion



# SOLV

Thinner solvent

for all types of our ceramic paint & coating

Article Nr : SOLV0400 400 ml / 345 g SOLV2000 2L / 1.760 g SOLV5000 5 L / 4.400 g



All our paints and coatings are ready to use, for certain spray applications, especially dark colors who require more than average color pigments, it may be necessary to use a little thinner solvent to achieve optimum flowability.

# RETA/ACCL

Retarder  
Accelerator


slow down flash time or speed up curing

Article Nr : RETA0400 400 ml / 345 g ACCL0200 200 ml / 180 g



If your application needs a longer flash time (for example, in hot temperatures) to build up the layer with a second or third coat, you can add the RETA Retarder. If you want to speed up the curing process, you can add the ACCL Accelerator. It can reduce curing time by 30–70% compared to uncatalyzed systems, and full hardness can develop 1.5–2x faster.


## Scan QR Code for TDS and SDS

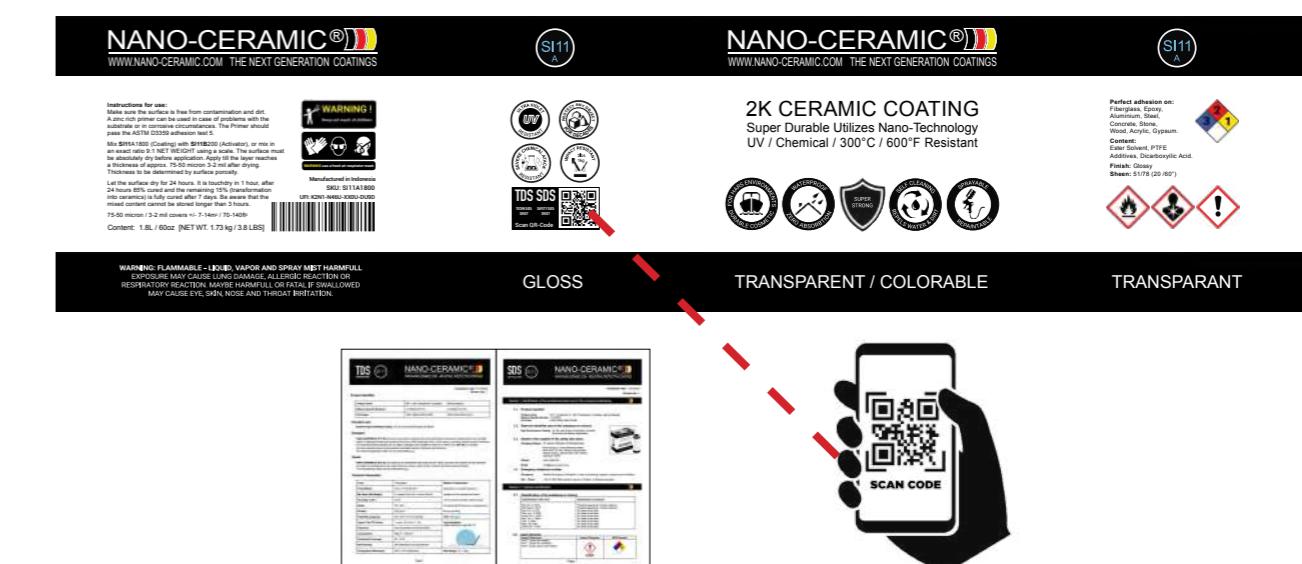

## (Test) Results



TGUS

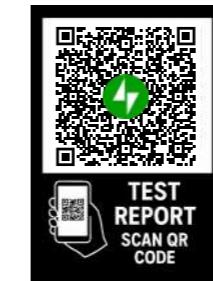

## Videos Application



## How to use our Permanent Coating System:

### Application information

These products can be stored for up to 24 months (in a dry, temperature-stable dark environment)

### Processing Temperature:

Ambient temperature: 5-30°C  
Avoid direct sunlight, Rain and/or high humidity.

### IMPORTANT:

Before you use a NANO-CERAMIC product, please make sure you wear suitable protection gear. We always recommend using a paint suit, respirator mask and latex or nitrile gloves.

### Outfit/Applicators:



Fresh Air Respirator



Paint Suit



Nitrile gloves



HVLP Paint Sprayer  
1.3mm / 1.5mm / 1.8mm nozzle



## How to use our UVA Coating System:

These products can be stored for up to 24 months (in a dry, temperature-stable dark environment)

### Processing Temperature:

Ambient temperature: 5-30°C  
Avoid direct sunlight, Rain and/or high humidity.

### IMPORTANT:

Before you use a NANO-CERAMIC product, please make sure you wear suitable protection gear. We always recommend using a paint suit, respirator mask and latex or nitrile gloves.

### Outfit/Applicators:



Fresh Air Respirator



Paint Suit



Nitrile gloves



HVLP Paint Sprayer  
1.3mm / 1.5mm / 1.8mm nozzle



# NANO-CERAMIC®

WWW.NANO-CERAMIC.COM INDUSTRIAL PROTECTIVE COATINGS



There is no better option than to use  
NANO-CERAMIC!

## *The Leader in Durability*

*Did you know?*

*That our coatings are made  
of pure silica sand, which is  
the most common element  
on Earth?*

**Dealer**