

NANO-CERAMIC®

WWW.NANO-CERAMIC.COM THE NEXT GENERATION COATINGS



Marine Permanent Coating Systems

What is NANO-CERAMIC Permanent Coating?

NANO-CERAMIC permanent coating is the latest generation of protective coating which transforms paint into a hard ceramic, providing superior scratch resistance and permanent protection for all exterior or interior surfaces.

NANO-CERAMIC permanent coating is 600°F resistant and more than 6 times stronger than traditional acrylic based paint finishes, and is effectively preventing damage that would otherwise affect the appearance and integrity of the original surface.

Low Maintenance for 3 decades to come!

Our NANO-CERAMIC permanent coating is (non PFAS) rigorously tested by an independent testing laboratory according to the European standard for outdoor paints (EN 1504-2) please find the test report on our website.

Can NANO-CERAMIC Permanent Coating be applied on any surface?

The NANO-CERAMIC permanent coating can be applied directly or indirectly on all kinds of interior and /or exterior surfaces (absorbing and non-absorbing), such as concrete, steel, wood, acrylic, gypsum and many more.



Is NANO-CERAMIC Permanent Coating self-cleaning?

NANO-CERAMIC permanent coating provides a permanent hydrophobic surface that is self cleaning, easier to clean and stays cleaner longer as water and dirt can not penetrate the ceramic layer. NANO-CERAMIC permanent coating is resistant to water vapor and water absorption.

Can our hydrophobic coatings increase acceleration time and speed while simultaneously reducing fuel consumption?

Yes, the superhydrophobic surface has a good drag reduction effect, and the maximum drag reduction rate is up to 23.4%.


In a new analysis from IPTEK ITS 2023 concerning Drag Reduction, the following conclusions have been obtained. It was found that there was an increase in acceleration due to drag reduction on the ship model treated with a superhydrophobic coating, showing a 31% improvement compared to the non-coated surface and a 27% improvement compared to a conventionally anti-fouling coated surface.

As published in the International Journal of Marine Engineering Innovation and Research. Click [here](#) for the IPTEK analyses.

Other paints are simply not suitable for longterm harsh outdoor environments.

In order to avoid poorly maintained properties (concrete rot, chipped and weathered paint, etc) for the next decades, our Permanent Coating System is simply the best solution to keep the value of your investment in place.

Superior in Color & Gloss Retention

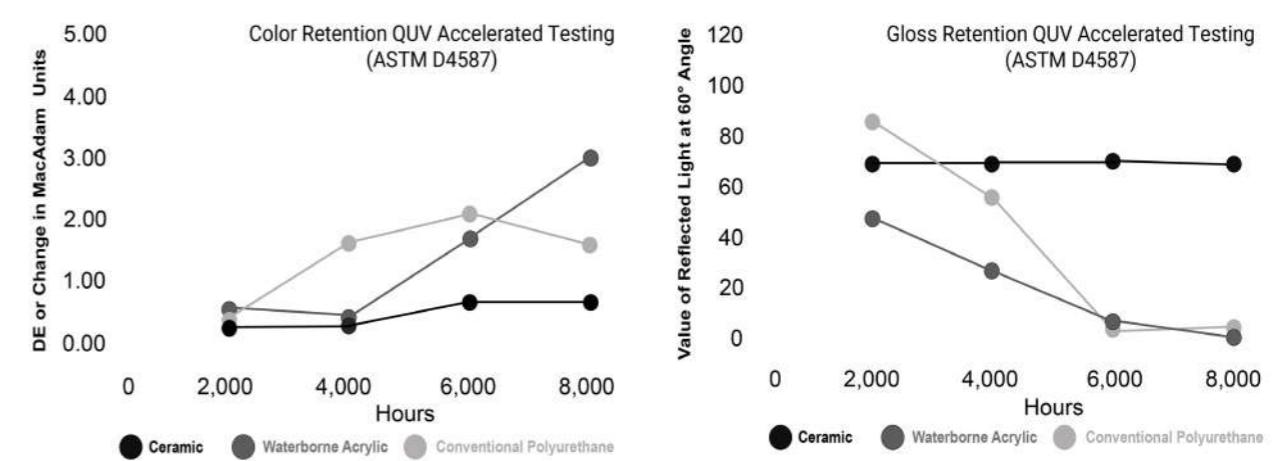

A special selection of high grade tinting chemicals computerized dispersed in a superior ceramic resin.


Conventional gelcoats are a mixture with Epoxy or Polyurethane resins, of which the quality of resin and pigments are the most important factor in the ultimate strength. Most have a lifespan of 15 years, with hardness, color and gloss retention (sun fading) and manual mixing towards consistent quality being the most common problems in keeping the desired object at an aesthetically pleasing level.

Quality Comparison of paints technologies

In case written in bold font it means existing shortcomings in quality.

Characteristics	Acrylic Latex walls ceilings	Acrylic walls floors	Epoxy floors	Polyurethane waterproofing	CERAMIC® all surfaces
Primer	Yes	Yes	Yes	Yes	No
Adhesion Strength	Poor	Poor	Poor	Poor	Excellent
Cross Cut Test	Poor	Poor	Good	Poor	Excellent
Abrasion Resistance	Poor	Poor	Average	Poor	Excellent
UV Radiation Resistance	Average	Average	Poor	Good	Excellent
Artificial Atmospheric Agents	Poor	Poor	Good	Good	Excellent
Colour Retention	Average	Average	Poor	Poor	Excellent
Gloss Retention	Poor	Poor	Poor	Poor	Excellent
Chemical Resistance	Good	Good	Good	Poor	Excellent
Severe Chemical Attack	Poor	Poor	Average	Poor	Excellent
Temperature Resistance	140°F	196°F	350°F	505°F	600°F
Thermal Shock Resistance	Good	Good	Poor	Good	Excellent
Carbon Dioxide Permeability	Poor	Poor	Good	Poor	Excellent
Permeability water vapour	Average	Average	Good	Average	Excellent
Water Absorption Rate	5-15%	1%	2%	3%	0%
Aging at 158°F	Poor	Poor	Good	Average	Excellent
Adhesion Strength Pull-off	Poor	Average	Good	Poor	Excellent
Impact Resistance	Poor	Average	Good	Poor	Excellent
Anti-Graffiti	No	No	No	No	Yes
Anti-Termite (Wood)	No	No	No	No	Yes
Hydrophobic Self Cleaning	No	No	No	No	Yes
Easy to Clean	No	No	No	No	Yes
Total Solar Reflectance (TSR)	60 (white)	60 (white)	60 (white)	60 (white)	88 (white)
Expected Lifetime in Years	<7	<7	<5-15	<5-15	15-30+

Ceramic Coating & Paint System

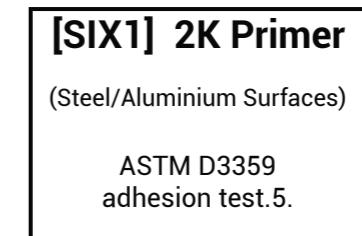

*Boats that are always in motion can also be coated with [SI11] Topcoat.



If you want to color a transparent topcoat in a custom color, the tinting machine automatically chooses between SI11Transparent or SI21 Strongest (Medium) White

This ensures the highest quality of the final mixture in combination with the most economical use of color pigments.



APPLY
VIDEO
SCAN
QR CODE

SI11

2-Component (2K)

Topcoat Transparent for glossy surfaces



Product ID	: SI112000 67 oz / 4.2 lbs
Consumption	: 3 layers 0.06 lbs/ft ² - 0.96 oz/ ft ² = 3 mil/ 70 ft ²
Reachable area	: 2 layers 0.04 lbs/ft ² - 0.64 oz/ ft ² = 2 mil/140 ft ² : 1 layer 0.02 lbs/ft ² - 0.32 oz/ ft ² = 1 mil/210 ft ²
Hardness	: H9
Used for	: Fiberglass, steel, aluminium, plastics, wood
Application field	: Marine, exteriors, interiors

SI11 is an incredibly strong 2-component paint system which forms a durable matrix of molecular bonds (transformation to ceramic) resulting in permanent protection of the surface.

Three simple steps: Clean, Dry, and Apply.

- Easily repels water, dirt, dust, and pollutants.
- This coating is permanent hydrophobic.
- Restores damaged finishes and reduces cleaning intervals.
- Resistant to all kinds of chemicals and UV radiation.
- Superior anti-pollution and anti-corrosion properties.
- This coating can withstand temperatures of 600°F.

Expected Life Duration up to 30 years+

How to use: Page 30

- Easy to apply**
Repaintable
- Cut maintenance costs**
- Anti-water spot**
Anti-corrosion
- Permanent hydrophobic**
- Self-cleaning**
stays cleaner longer
- Anti-scratch**
- Impact Resistance**
2 lbs -2.6 ft
- Protects your investment**

SI12

2-Component (2K)

Topcoat Transparent for matted surfaces



Product ID	: SI112000 67 oz / 4.4 lbs
Consumption	: 3 layers 0.06 lbs/ft ² - 0.96 oz/ ft ² = 3 mil/ 70 ft ²
Reachable area	: 2 layers 0.04 lbs/ft ² - 0.64 oz/ ft ² = 2 mil/140 ft ² : 1 layer 0.02 lbs/ft ² - 0.32 oz/ ft ² = 1 mil/210 ft ²
Hardness	: H9
Used for	: Fiberglass, steel, aluminium, plastics, wood
Application field	: Marine, exteriors, interiors

SI12 is an incredibly strong 2-component paint system which forms a durable matrix of molecular bonds (transformation to ceramic) resulting in permanent protection of the surface.

Three simple steps: Clean, Dry, and Apply.

- Easily repels water, dirt, dust, and pollutants.
- This coating is permanent hydrophobic.
- Restores damaged finishes and reduces cleaning intervals.
- Resistant to all kinds of chemicals and UV radiation.
- Superior anti-pollution and anti-corrosion properties.
- This coating can withstand temperatures of 600°F.

Expected Life Duration up to 30 years+

How to use: Page 30

- Easy to apply**
Repaintable
- Cut maintenance costs**
- Anti-water spot**
Anti-corrosion
- Permanent hydrophobic**
- Self-cleaning**
stays cleaner longer
- Anti-scratch**
- Impact Resistance**
2 lbs -2.6 ft
- Protects your investment**



TEST
REPORT
SCAN QR
CODE



SI21

2-Component (2K)

Paint The Strongest White for glossy surfaces

Product ID	: SI212000 67 oz / 5.3 lbs
Consumption	: 3 layers 0.044 lbs/ft ² - 0.56 oz/ ft ² = 3 mil/120 ft ²
Reachable area	: 2 layers 0.030 lbs/ft ² - 0.37 oz/ ft ² = 2 mil/160 ft ² : 1 layer 0.014 lbs/ft ² - 0.19 oz/ ft ² = 1 mil/240 ft ²
Hardness	: H8
Used on	: Gelcoat, fiberglass, steel, aluminium, plastics, wood
Application field	: Marine Exteriors

SI21 is an incredibly strong 2-component paint system which forms a durable matrix of molecular bonds (transformation to ceramic) resulting in permanent protection of the surface.

Three simple steps: Clean, Dry, and Apply.

- Easily repels water, dirt, dust, and pollutants.
- This coating does not absorb any water
- Resistant to all kinds of chemicals and UV radiation.
- This coating can withstand temperatures of 600°F

Expected Life Duration up to 25 year+



How to use: Page 30



Easy to apply
Repaintable



Cut maintenance costs



Anti-water spot
Anti-corrosion



Permanent
hydrophobic



Self-cleaning
stays cleaner longer



Anti-scratch



Impact Resistance
2lbs/2.6ft



Protects your
investment

SI14

3-Component (3K)


The Smartest White black/red/blue/grey/transparent

Product ID	: SI141000-BK-RD-BL-GR 32 oz / 2.4 lbs
Consumption	: SI144000-BK-RD-BL-GR 1 gal / 9.5 lbs
Reachable area	: 2 layers 0.08 lbs/ft ² -1.30 oz/ft ² = 8 mil/140 ft ²
Hardness	: 1 layer 0.04 lbs/ft ² -0.65 oz/ft ² = 4 mil/280 ft ²
Used for	: Gelcoat, fiberglass, steel, aluminium, plastics, wood
Application field	: Marine Antifouling

SI14 is a revolutionary High-Tech Ceramic Antifouling Paint with a self-polishing amphiphilic biofilm that masks the boat hull surface to the marine organisms.

This world's leading antifouling stores more and releases less non-biocidal agents, resulting in by far the longest maintenance interval of 8 year+ currently available.

How Biofilms form:

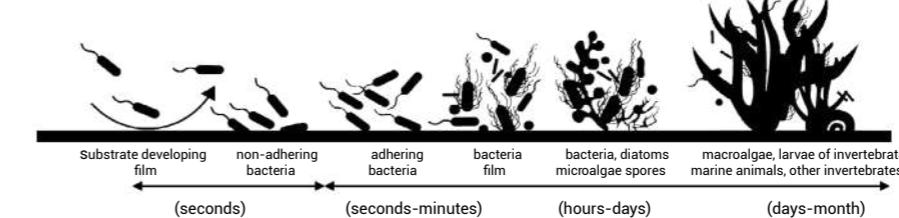

How to use: Page 30



Easy to apply
Repaintable



Amphiphilic
Invisible Hull Technology



Cut maintenance costs



Organic Copper and Tin
Non Biocidal



Super Sleek Surface
Algae release <6 knots



Self-cleaning
stays cleaner longer



Save fuel



Impact Resistance
2lbs - 2.6ft



Thermal Shock-
Resistant



SI31

2-Component (2K)

Textured Transparent Semi Gloss

antislip - high impact resistant



How to use: Page 30

Product ID	: SI312000 67 oz / 4.6 lbs
Consumption	: 3 layers 0.050 lbs/ft ² - 0.76 oz/ ft ² = 3 mil/ 90 ft ²
Reachable area	: 2 layers 0.033 lbs/ft ² - 0.51 oz/ ft ² = 2 mil/180 ft ²
	: 1 layer 0.017 lbs/ft ² - 0.25 oz/ ft ² = 1 mil/270 ft ²

Hardness : H9

Used on : Gelcoat, fiberglass, steel, aluminium, plastics, wood, virtually any surface.

Application area : Buildings, marine, offshore structures, bridges, etc

SI31 is a clear solvent-based ceramic coating, linked with a ceramic activator, available in semi-gloss and includes sprayable nano particles. Known for its exceptional durability, this coating easily applies to any organic surface without needing a primer. Its textured design makes it perfect for anti-slip needs.

- Easily repels water, dirt, dust, and pollutants.
- This coating has an outstanding hydrophobic effect.
- Resistant to all kinds of chemicals and UV radiation.
- This coating can withstand temperatures of 600°F.
- Zero absorption, waterproof, insulation and heat rejecting


Expected Life Duration up to 30 years+

- Easy to apply Repaintable
- Cut maintenance
- Anti-water spot Anti-corrosion
- Permanent hydrophobic
- Self-cleaning stays cleaner longer
- Anti-scratch
- Visibility safety
- Protects your investment
- Impact Resistance 2lbs/2.6ft

Maintenance Plan Thin Film Coating



Step 1
Washing



Step 2
Polishing



Step 3
Steril Cleaner



Step 4
Basecoat
Curing time: 2 hours
after application




Step 5
Nano Layer
Hydrophobic
Topcoat



Step 6
Curing time:
6 hours in
ambient
temperature


Where to use our coatings:

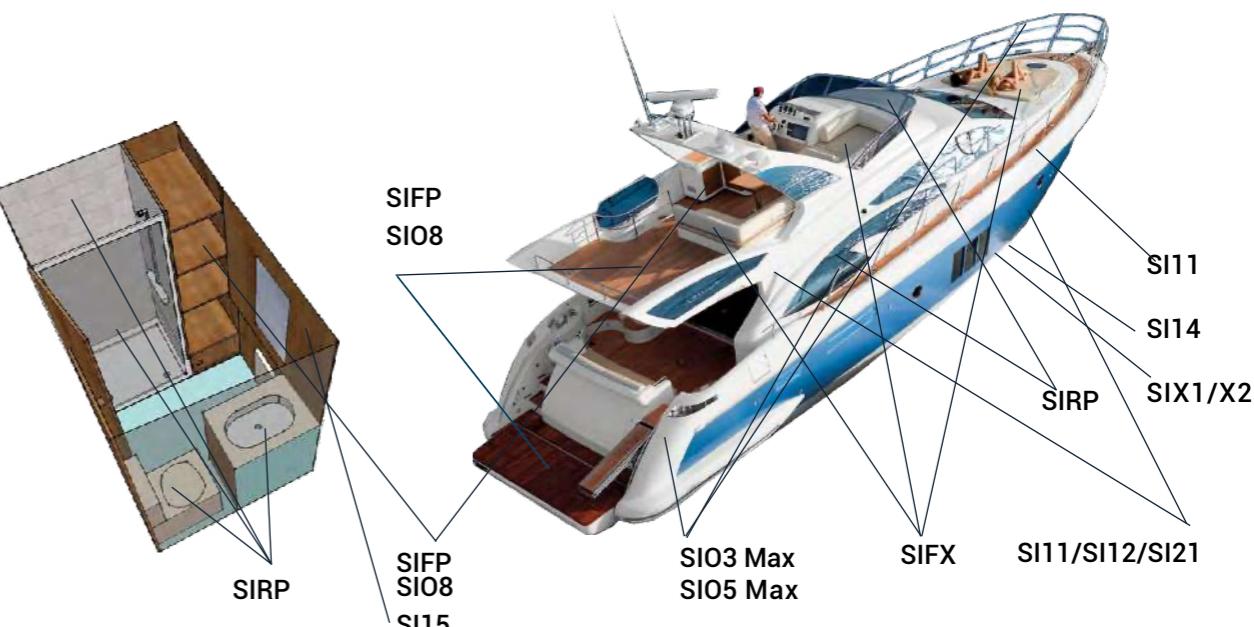

Color mixing has never been so easy!!!

X- SMART is the modular version of the acclaimed dispenser series, extremely cost-effective and easy to operate, with a low maintenance

This color mixer has a robust and tubeless design, built with a patented pump technology (to reduce waste) and identical features, making it a highly advanced dispenser, ideally suited to reduced capacity.

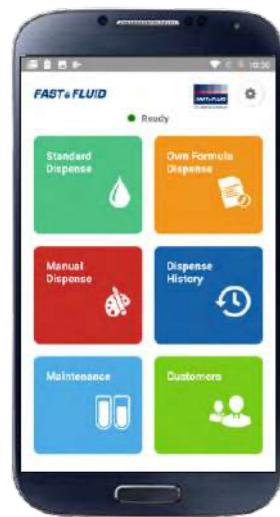

X-SMART
Stabilizer plates

16 High Grade Coloring chemicals



Titanium White
Masstone Tint 844-0061 1.05 gal



Quinacridone Red
Masstone Tint 844-0451 32 oz



Scarlet Red
Masstone Tint 844-0526 32 oz



Lead Free Orange
Masstone Tint 844-0982 32 oz



Trans Red Oxide
Masstone Tint 844-1054 32 oz



Red Oxide
Masstone Tint 844-1063 32 oz



Burnt Umber
Masstone Tint 844-1352 32 oz



Trans Yellow Oxide
Masstone Tint 844-1852 32 oz



Yellow Oxide
Masstone Tint 844-1863 32 oz



Lead Free Med Yellow
Masstone Tint 844-2555 32 oz



Yellow
Masstone Tint 844-2826 32 oz



Organic Yellow
Masstone Tint 844-2852 32 oz



PHTHALO Green
Masstone Tint 844-5558 32 oz



Quinacridone Violet
Masstone Tint 844-9451 32 oz



Lamp Black
Masstone Tint 844-9955 32 oz



PHTHALO BLUE
Masstone Tint 844-7262 32 oz

Color card

Residential		
SI13 White Egg-Shell (Flat Finish) 15/25 (20/60°)	SI41 Textured White Semi Gloss 41/69 (20/60°)	
SI15 White Egg Shell (Flat Finish) 18/28 (20/60°)	SI42 Textured White Matte 11/21 (20/60°)	
SI21 White Gloss 49/77 (20/60°)		
SI22 White Satin 33/59 (20/60°)		
Original	RAL 9018	RAL 3015
Cool white	Papyrus white	Light pink
RAL 9001	RAL 9022	RAL 9007
Cream white	Pearl light grey	Pastel blue
RAL 9002	RAL 9023	RAL 4009
Grey white	Pearl dark grey	Pastel violet
RAL 9003	RAL 1000	RAL 6027
Signal white	Green beige	Light green
RAL 9004	RAL 1001	RAL 7000
Signal black	Beige	Squirrel grey
RAL 9005	RAL 1002	RAL 1036
Jet black	Sand yellow	Pearl gold
RAL 9006	RAL 1011	RAL 8029
White aluminium	Brown beige	Pearl copper
RAL 9007	RAL 1013	RAL 4012
Grey aluminium	Pearl white	Pearl blackberry
RAL 9010	RAL 1014	RAL 5025
Pure white	Ivory	Pearl gentian blue
RAL 9011	RAL 1015	RAL 6036
Graphite black	Light ivory	Pearl opal green
RAL 9016	RAL 9017	Mahogany braun

Wood		
SI11 Transparent Gloss 51/78 (20/60°)		
SI12 Transparent Matte 11/21 (20/60°)		
SI22 White Satin 33/59 (20/60°)		
Original		
SI11 Transparent		
SI11 Light		
SI11 Nut		
SI11 Colonial		

Industrial		
SI11 Transparent Gloss 51/78 (20/60°)		
SI21 White Gloss 49/77 (20/60°)		
SI22 White Satin 33/59 (20/60°)		
Original		
Transparent		
RAL 1026		
Luminous yellow		
Traffic red		
Jet black		
Golden yellow [Cat]		
Leaf green [J.D Deere]		
Light grey		
Dark grey		
Silver grey		
Signal brown		
Pale brown		

Other colors need minimal 220 lbs

Residential		
SI12 Transparent Matte 11/21 (20/60°)		
SI31 Textured Transparent Semi Gloss 41/69 (20/60°)		
SI33 Textured Black Semi Gloss 41/69 (20/60°)		
SI42 Textured White Matte 11/21 (20/60°)		
Original		
Cool white		
RAL 9010		
Pure white		
Burgundy		
Cream white		
Platinum		
Jet black		
Distant blue		
Traffic red		
Golden yellow [Cat]		
Leaf green [J.D Deere]		
Silver grey		
Light grey		
Dark grey		
Silver grey		
Light grey		
Pure white		
Cream		
Beige		
Olive yellow		
Original		
Transparent		
RAL 3000		
Transparent matte		
RAL 7031		
Light stone		
RAL 6031		
Transparent		
RAL 9005		
Jet Black		
Signal Red		
Ultra marine blue		
Signal Grey		



What is NANO-CERAMIC UVA Topcoat?

NANO-CERAMIC® UVA Topcoat is a revolutionary low-VOC, non-PFAS, self-leveling protective coating system that forms an ultra-hard, glass-like hydrophobic barrier—ideal for high-performance marine environments.

Specifically engineered for extreme durability and a sleek, high-gloss finish, UVA Topcoat delivers exceptional resistance to saltwater, intense UV exposure, biofouling, and harsh marine chemicals like hydrofluoric acid (HF), hydrochloric acid, and citric acid—all while remaining completely safe and compliant for onboard use (Food contact safe).

Powered by advanced nanotechnology, UVA Topcoat extends the lifespan of marine surfaces by protecting polyester, epoxy, polyurethane, and acrylic resins steel, aluminum, composites, and wood from corrosion, surface breakdown, and environmental wear.—making it an exceptionally versatile solution for virtually any surface.

Why UVA Topcoat is a Game-Changer in Marine Protection?

For decades, protective coatings like epoxy, polyurethane (PU), and acrylic have been the industry standard. However, they all share a critical weakness—UV degradation. Prolonged exposure to sunlight causes these coatings to yellow, crack, and deteriorate, leading to costly maintenance and premature failures.

Where can UVA Topcoat be applied in Marine use?

UVA Topcoat is highly versatile and suitable for a wide range of marine applications:


- Yachts & Boats – Hulls, decks, topsides, and superstructures
- Speedboats – UV protection and ultra-slick finish for high-performance watercraft
- Marine Infrastructure – Docks, piers, pontoons, and submerged structures
- Ship Interiors – Tables, countertops, cabins, walls, and decorative panels
- Commercial Vessels – Outer hulls, ballast tanks, walkways, and engine rooms
- Antifouling Protection – Ideal for vessels in constant motion or those stored on land

Compatible with both new builds and retrofits, UVA Topcoat adapts to various marine substrates and operating conditions with ease.

Can our hydrophobic coatings boost speed and cut fuel use?

Yes—our superhydrophobic sleek surface reduces drag by up to 23.4%, leading to 31% faster acceleration compared to uncoated surfaces and 27% faster than conventional antifouling coatings (Source: IPTEK ITS, 2023).

How it Works

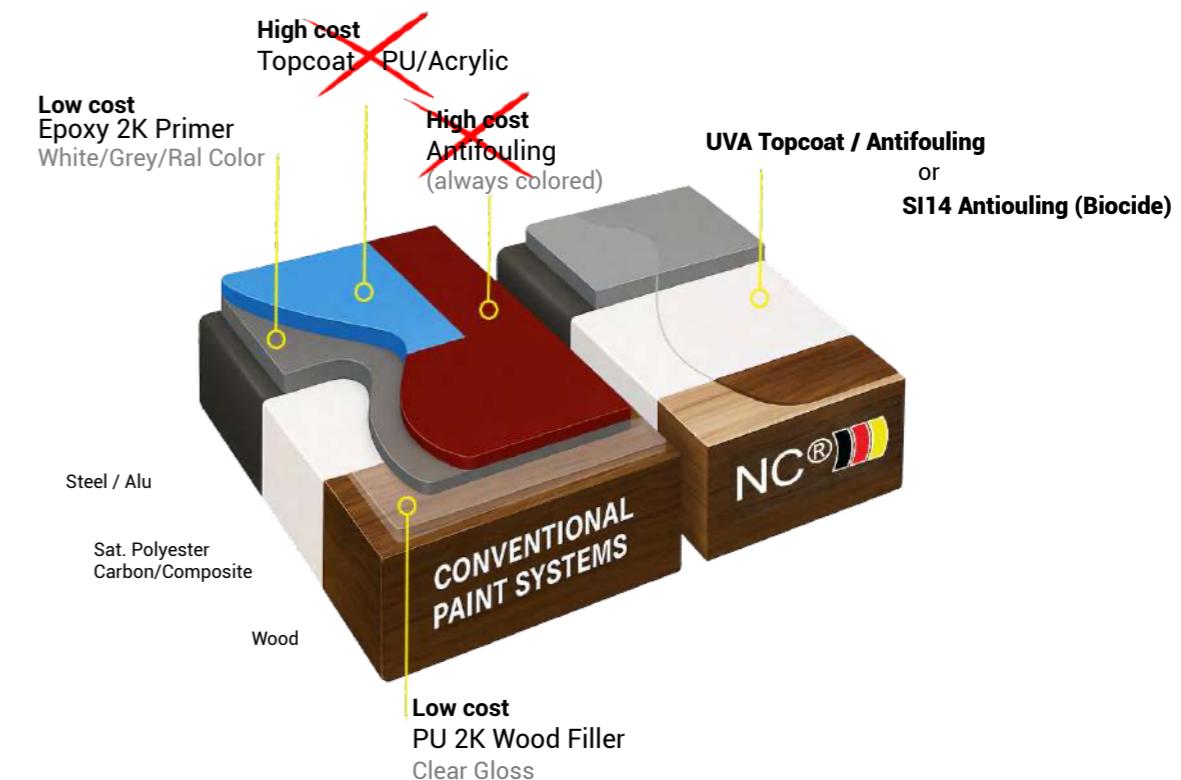

Superior Performance at the Lowest Cost.

UVA Topcoat isn't just another coating—it's a next-generation solution that replaces complex and expensive multi-layer systems with a single, high-performance layer.

By applying directly over low-cost primers, UVA Topcoat eliminates the need for expensive finishing coats. Its smart chemistry and simplified process make traditional topcoat systems outdated by comparison.

Whether for industrial, marine, infrastructure, or decorative use, UVA Topcoat simplifies your process and multiplies your value—proving that true performance doesn't have to come at a high price.

Freedom in Protection Years

Long-Lasting Protection, Layer by Layer

A single 6 μm (micron) layer applied using HVLP spray technology can provide up to 8 years of protection. Need more durability? Just add more layers—it's that simple.

Apply wet-on-wet: once the first coat flashes off (dry to the touch but still tacky), you can immediately apply the next. This method prevents trapped gases and creates a seamless, chemical-resistant film with hydrophobic properties—making surfaces easier to clean and maintain.

Coverage & Application Efficiency

UVA Topcoat is engineered for maximum efficiency with minimal material use—delivering high-performance protection at a fraction of the volume required by traditional coatings.

Recommended usage is approximately $\pm 0.025 \text{ lbs/ft}^2$ per layer (by wipe or spray), resulting in a film thickness of around 6 microns, with one liter covering up to 800 ft^2 .




Color Tinting Option for Marine Applications

For customized aesthetics, UVA Topcoat can be tinted using our colorants on page 22-23. These high-performance, solvent-free pigments provide long-lasting color stability and UV resistance—perfect for marine environments where both protection and appearance matter. Ideal for yachts, decks, interiors, or any visible surface requiring a durable, colored finish without compromising the coating's hydrophobic and chemical-resistant properties.

Quality Comparison of paints technologies

In case written in bold font it means existing shortcomings in quality.

Characteristics	Acrylic Latex walls ceilings	Acrylic walls floors	Epoxy floors	Polyurethane waterproofing	UVA Topc all surfaces
Primer	Yes	Yes	Yes	Yes	No
Adhesion Strength	Poor	Poor	Poor	Poor	Excellent
Cross Cut Test	Poor	Poor	Good	Poor	Excellent
Abrasion Resistance	Poor	Poor	Average	Poor	Excellent
UV Radiation Resistance	Average	Average	Poor	Good	Excellent
Artificial Atmospheric Agents	Poor	Poor	Good	Good	Excellent
Colour Retention	Average	Average	Poor	Poor	Excellent
Gloss Retention	Poor	Poor	Poor	Poor	Excellent
Chemical Resistance	Good	Good	Good	Poor	Excellent
Severe Chemical Attack	Poor	Poor	Average	Poor	Excellent
Temperature Resistance	140°F	196°F	350°F	505°F	550°F
Thermal Shock Resistance	Good	Good	Poor	Good	Excellent
Carbon Dioxide Permeability	Poor	Poor	Good	Poor	Excellent
Permeability water vapour	Average	Average	Good	Average	Excellent
Water Absorption Rate	5-15%	1%	2%	3%	0%
Aging at 70°C	Poor	Poor	Good	Average	Excellent
Adhesion Strength Pull-off	Poor	Average	Good	Poor	Excellent
Impact Resistance	Poor	Average	Good	Poor	Excellent
Anti-Graffiti	No	No	No	No	Yes
Anti-Termite (Wood)	No	No	No	No	Yes
Hydrophobic Self Cleaning	No	No	No	No	Yes
Easy to Clean	No	No	No	No	Yes
Total Solar Reflectance (TSR)	60 (white)	60 (white)	60 (white)	60 (white)	88 (white)
Expected Lifetime in Years	<7	<7	<5-15	<5-15	8/16/24

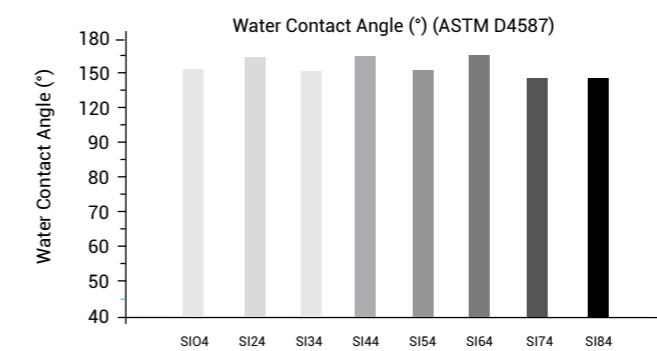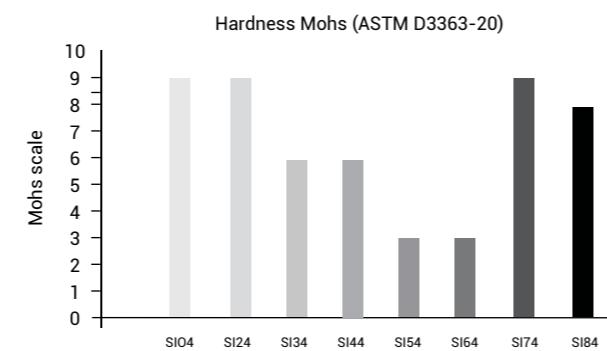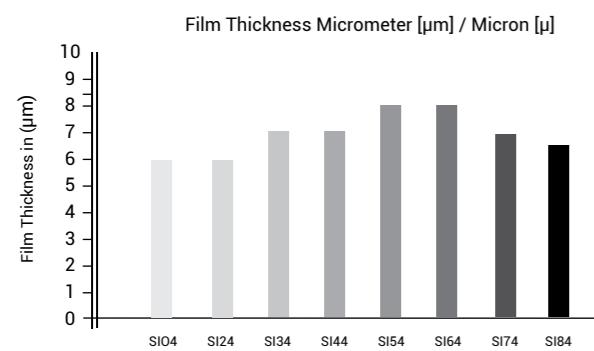



APPLY
VIDEO
SCAN
QR CODE



S104

1-Component (2K)

Topcoat Transparent for glossy surfaces

Product ID : S1041LUVA 32 oz / 2.03 lbs S10405UVA 16 oz / 1 lbs
Consumption : 3 layers +/- 0.075 lbs/ft² - 0.12 oz/ft² 18 micron = 200 ft²
Reachable area : 2 layers +/- 0.050 lbs/ft² - 0.08 oz/ft² 12 micron = 400 ft²
: 1 layer +/- 0.025 lbs/ft² - 0.04 oz/ft² 6 micron = 800 ft²

Hardness/Cupping : H9 / Flexibility ISO 1520 >21mm

Used for : Fiberglass, steel, aluminium, plastics, wood

Application field : Marine, exteriors, antifouling interiors

S104 is an incredibly strong 1-component paint system which forms a durable matrix of molecular bonds (transformation to ceramic) resulting in permanent protection of the surface.

Three simple steps: Clean, Dry, and Apply.

- Easily repels water, dirt, dust, and pollutants.
- This coating is permanent hydrophobic.
- Restores damaged finishes and reduces cleaning intervals.
- Resistant to all kinds of chemicals and UV radiation.
- Superior anti-pollution and anti-corrosion properties.
- This coating can withstand temperatures of 550°F.

Expected life duration 4-16 or 24 Years (layer thickness)



How to use: Page 31



Easy to apply
Repaintable



Cut maintenance costs



Anti-water spot
Anti-corrosion



Permanent
hydrophobic



Self-cleaning
stays cleaner longer



Anti-scratch



Impact Resistance
30"-2lbs



Protects your
investment



S124

1-Component (1K)

Topcoat Transparent for matte surfaces

Product ID : S1241LUVA 32 oz / 2.13 lbs S12405UVA 16oz / 1.05 lbs
Consumption : 3 layers +/- 0.075lbs/ft² - 0.12oz/ft² 18 micron = 200ft²
Reachable area : 2 layers +/- 0.050lbs/ft² - 0.08oz/ft² 12 micron = 400ft²
: 1 layer +/- 0.025lbs/ft² - 0.04oz/ft² 6 micron = 800ft²

Hardness/Cupping : H9 / Flexibility ISO 1520 >21mm

Used for : Fiberglass, steel, aluminium, plastics, wood

Application field : Marine, exteriors, interiors

S104 is an incredibly strong 1-component paint system which forms a durable matrix of molecular bonds (transformation to ceramic) resulting in permanent protection of the surface.

Three simple steps: Clean, Dry, and Apply.

- Easily repels water, dirt, dust, and pollutants.
- This coating is permanent hydrophobic.
- Restores damaged finishes and reduces cleaning intervals.
- Resistant to all kinds of chemicals and UV radiation.
- Superior anti-pollution and anti-corrosion properties.
- This coating can withstand temperatures of 550°F.

Expected life duration 8-16 or 24 Years (layer thickness)



How to use: Page 31



Easy to apply
Repaintable



Cut maintenance costs



Anti-water spot
Anti-corrosion



Permanent
hydrophobic



Self-cleaning
stays cleaner longer



Anti-scratch



Impact Resistance
30"-2lbs



Protects your
investment



TEST
REPORT
SCAN QR
CODE



Marine-Grade Color Protection – Super Transparent

For boats where weight, speed, and durability matter, our advanced hybrid coating system offers a breakthrough: vibrant transparent tints or metallic finishes without sacrificing performance. By blending NANO-CERAMIC® Super Transparent Colorants into our UVA Topcoat, you get:

Ultra-thin coating (<15 microns) = minimal weight

H9 surface hardness = max scratch resistance

Hydrophobic & anti-fouling = fast cleaning, less drag

UV & salt resistant = marine-grade longevity

Clear or colored: keep visibility through glass or plexi

Optional metallic effect for custom marine finishes

Perfect for:

Plexiglass hatches & windscreens

Cabin glass, partitions, skylights

Carbon fiber panels & consoles

Stainless/aluminum trims & detailing



TR.OXIDE YELLOW A-2R 130
Masstone
Tint
77492-1 **3.2 oz**



YELLOW A-F2G 100
Masstone
Tint
11785 **3.2 oz**



YELLOW A-H3G 100
Masstone
Tint
11781 **3.2 oz**



YELLOW A-HRD 100
Masstone
Tint
21108 **3.2 oz**



ORANGE A-HLD 100
Masstone
Tint
11780 **3.2 oz**



TRANSOXIDE RED A-G 130
Masstone
Tint
77491-1 **3.2 oz**



RED A-D3GD 130
Masstone
Tint
56110 **3.2 oz**



PINK A-E 130
Masstone
Tint
73915 **3.2 oz**



RED VIOLET A-ER 130
Masstone
Tint
73900 **3.2 oz**



VIOLET A-RL 100
Masstone
Tint
51319 **3.2 oz**



YELLOW A-N4G 100-ST
Masstone
Tint
279376 **3.2 oz**



RED A-P2Y 100-ST
Masstone
Tint
289404 **3.2 oz**



PINK A-EB 100-ST
Masstone
Tint
287516 **3.2 oz**



BLUE A-BTR 100-ST
Masstone
Tint
290247 **3.2 oz**



BLUE A-BG 100
Masstone
Tint
74160 **3.2 oz**



GREEN A-GNX 130
Masstone
Tint
74260 **3.2 oz**



BLACK A-N 100
Masstone
Tint
77266 **3.2 oz**



OXIDE YELLOW A-BV 100
Masstone
Tint
771740 **3.2 oz**



BLUE A-BTG 100-ST
Masstone
Tint
275536 **3.2 oz**



GREEN A-GBX 100-ST
Masstone
Tint
323291 **3.2 oz**



BLACK A-NB 100-ST
Masstone
Tint
289518 **3.2 oz**



BLACK A-NY 100-ST
Masstone
Tint
272060 **3.2 oz**



OXIDE YELLOW A-CR 100
Masstone
Tint
77310 **3.2 oz**



OXIDE YELLOW A-R 100
Masstone
Tint
77492 **3.2 oz**



OXIDE RED A-B 100
Masstone
Tint
77491 **3.2 oz**



WHITE A-R 100
Masstone
Tint
77891 **3.2 oz**

SIX1

2-Component (2K)

Primer Epoxy Polyamide

heavy duty - anti-corrosion



Product ID : SIX11250-WH/GR 42 oz / 3.2 lbs SIX15000-WH/GR 1.32 gal / 12.8 lbs

Consumption : 2 layers +/- 0.53 lbs/ft² - 0.7oz/ft² 80 micron = 50 ft²

Reachable area : 1 layer +/- 0.26 lbs/ft² - 0.4oz/ft² 40 micron = 100 ft²

Hardness : H5

Colors : White, Grey or RAL (RAL Minimum Order 250 pcs 1.32 gal)

Used on : Concrete, Steel, Aluminium, Fiberglass and other organic surfaces

Application area : Buildings, marine, airports, offshore structures, bridges

-  **Fast Repaintable**
-  **Excellent adhesion**

SIX1 is a solvent based epoxy polyamide primer. This primer is used for corrosion protection on concrete, stainless, galvanized, carbon and alloy steel, aluminum in corrosive conditions and has excellent adhesion to all organic substrates and to all of our ceramic topcoats. The primer can be applied at a relative humidity of 40-80% and can be painted over within 8 hours 85°F, 1 hours 140°F.



SIX2

2-Component (2K)

Primer Surfacer Acrylic Alkyd

smooth - surface modifier



Product ID : SIX21250-WH/GR 42 oz / 3.2 lbs SIX25000-WH/GR 1.32 gal / 12.8 lbs

Consumption : 2 layers +/- 0.44 lbs/ft² - 0.7 oz/ft² 60 micron = 60 ft²

Reachable area : 1 layer +/- 0.22 lbs/ft² - 0.4 oz/ft² 30 micron = 120 ft²

Hardness : H3

Colors : White or Grey

Used on : Steel, aluminium, wood, fiberglass, and old paint systems.

Application area : Buildings, marine, airports, bridges

-  **Fast Repaintable**
-  **Excellent adhesion**
-  **VOC Free**

SIX2 High-quality 2K surfacer (two-component basecoat) for auto-refinish, marine, and industrial coating applications where a smooth surface is required. The primer has excellent adhesion to all organic substrates and to all of our ceramic topcoats. The primer can be applied at a relative humidity of 30-80% and can be painted over within 4 hours 85°F, 1 hours 140°F.



SIX3

2-Component (2K)

Primer PU Wood Filler

surface modifier - absorbtion reducer

Product ID : SIX31500 51 oz / 3.3 lbs

Consumption : 2 layers +/- 0.40 lbs/ft² - 0.6 oz/ft² 60 micron = 80 ft²

Reachable area : 1 layer +/- 0.20 lbs/ft² - 0.3 oz/ft² 30 micron = 120 ft²

Hardness : H4

Used on : Steel, Aluminium and other organic surfaces

Application area : Buildings, marine, airports, offshore structures, bridges

SIX3 is a solvent borne transparent wood filler. This primer is used as surface modification for, wood or natural stone to reduce capillary absorption and has an excellent adhesion to all organic substrates and towards one of our ceramic top coats. The primer can be applied at a relative humidity of 40-80%.



-  **Fast Repaintable**
-  **Excellent adhesion**



SIX4

1-Component (1K)

Primer Acrylic Waterbased

all surfaces modifier - stain killer



-  **Fast Repaintable**
-  **Excellent adhesion**
-  **VOC Free**

Product ID : SIX41000-WH/GR 32 oz / 2.65 lbs SIX44000-WH/GR 1 gal / 10.6 lbs
Consumption : 2 layers +/- 0.53 lbs/ft² - 0.7 oz/ft² 80 micron = 50 ft²
Reachable area : 1 layer +/- 0.26 lbs/ft² - 0.4 oz/ft² 40 micron = 100 ft²
Hardness : H3
Colors : White, Grey or RAL (RAL Minimum Order 250 pcs 1gal)
Used on : Concrete, wood, drywalls and old waterbased paints
Application area : Buildings, walls and ceilings indoor or outdoor

SIX4 Acrylic Water-Based Primer is a premium, all-purpose primer-sealer with excellent adhesion, stain-blocking, and hiding power. Ideal for both interior and exterior surfaces, it bonds to glossy surfaces without sanding, effectively blocks stains, and provides a smooth foundation for any solvent-based or water-based topcoat



SIX5

2-Component (2K)

Putty Polyester

ultra smooth - sandable

Product ID	: SIX51000-WH/GR 2.2 lbs
Colors	: White, Grey
Used on	: Metal, wood, fiberglass, concrete, plastics
Application area	: Buildings, marine, airports, offshore structures, bridges private housing, etc.

SIX5 is a High quality 2 (two) component Epoxy base putty for auto-refinish, marine and industrial coating applications.



- Fast Repaintable
- Excellent adhesion



SOLV

Thinner solvent

for all types of our ceramic paint & coating

Product ID	: SOLV0400 14 oz / 0.8 lbs	SOLV2000 64 oz / 3.9 lbs	SOLV5000 1.32 gal / 9.7 lbs
------------	----------------------------	--------------------------	-----------------------------



All our paints and coatings are ready to use, for certain spray applications, especially dark colors who require more than average color pigments, it may be necessary to use a little thinner solvent to achieve optimum flowability.

RETA/ACCL

Retarder
Accelerator

slow down flash time or speed up curing


Product ID	: RETA0400 14 oz / 0.85 lbs	ACCL0200 7 oz / 0.4 lbs
------------	-----------------------------	-------------------------



If your application need longer flash time (longer time to build up the layer with a second or third coat you can add the RETA Retarder.

In case you want to speed up the curing process you can add the ACCL Accelerator.

Scan QR Code for TDS and SDS

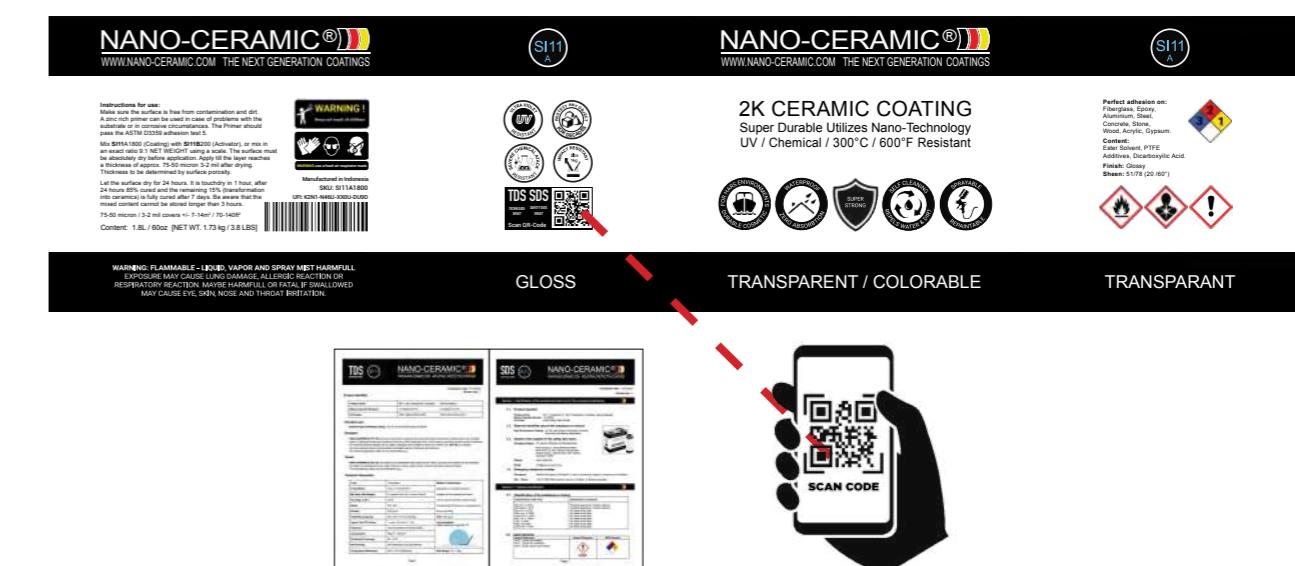

Video Application & (Test) Results



How to use our Permanent Coating System:

These products can be stored for up to 24 months (in a dry, temperature-stable dark environment)

Processing Temperature:
Ambient temperature: 41-86°F
Avoid direct sunlight, Rain and/or high humidity.

IMPORTANT:
Before you use a NANO-CERAMIC product, please make sure you wear suitable protection gear. We always recommend using a paint suit, respirator mask and latex or nitrile gloves.

Outfit/Applicators:



Fresh Air Respirator



Paint Suit



Nitrile gloves



Professional Paint Sprayer
1.3-1.7mm / 0.05-0.06" nozzle



Paint Roller
(Microfiber)



Respirator



Paint Brush
(acrylic)

Application information

The SI11/SI12/SI21/SI14/SI31 coatings can be applied directly or indirectly on all surfaces (porous and non-porous) such as concrete, steel, wood, glasfiber, acrylic, gypsum, painted or unpainted surfaces, indoors, or outdoors. The surface underneath will be superbly protected against erosion and corrosion and will stay cleaner longer. Cleaning becomes quicker, easier, and less expensive, as special cleaning agents are unnecessary.

Preparation

Make sure the surface is free from any contamination and dirt. A zinc rich primer can be used for ferrous metals that are exposed to coastal and marine environments or in case of problems with the substrate.

Warning the surface must be completely dry before application and must stay dry for 6 hours after application after application!

The 2-Component Permanent Coating System

Mix the can SI11B-SI12B-SI21B-SI31B with the can of SI11A-SI12A-SI21A-SI31A by pouring can B into can A, or measure **exactly by NET WEIGHT** in a ratio of 9:1 **by using a scale and mix very well**.

Mix SI14A2800 with SI14C0800 by pouring can C into can A, or measure **exactly by NET WEIGHT** in a ratio of 7:2 **by using a scale and mix very well**, then add the entire content of SI14B0400 or measure **exactly by NET WEIGHT** in a ratio of 7:1 (compared to SI14A2800) **by using a scale and mix very well**. Carefully pour the mixed contents into a professional paint sprayer, and spray in thin layers until the surface reaches your desired thickness. Depending on the surface, material and structure, different application techniques can be used (such as paint rollers or brushes). Let the surface dry for 24 hours. It is touch-dry in 1 hours, after 4 hours, 85% cured, and the remaining 15% (transformation into ceramics) is fully cured after 7 days. Be aware that the mixed contents cannot be stored longer than 3 hours. If have orange peel you may wet /sand the surface wit P1500 and after P2000 and polish with One Step Polish till high shine. The surface can simply be maintained with a high pressure washer at 80 bar using our biologically degradable Reactivaing Shampoo. The surface can simply be maintained with a high pressure washer at 80 bar using our biologically degradable Reactivating Shampoo.

Tool cleaning and Thinner solvent

The individual components, as well as the mixing system of the paint sprayer, can be diluted and cleaned using our solvent. All of our paints and coatings are ready to use, for certain spray applications, especially dark colors which require more color pigment than average, it may be necessary to use our SOLV thinner solvent to achieve optimal flowability.

How to use our UVA Coating System:

These products can be stored for up to 24 months (in a dry, temperature-stable dark environment)

Processing Temperature:
Ambient temperature: 41-86°F
Avoid direct sunlight, Rain and/or high humidity.

IMPORTANT:
Before you use a NANO-CERAMIC product, please make sure you wear suitable protection gear. We always recommend using a paint suit, respirator mask and latex or nitrile gloves.

Outfit/Applicators:



Respirator



Paint Suit



Nitrile gloves



HVLP Paint Sprayer
1.0-1.3mm / 0.03-0.05" nozzle



Microfiber Roller
(6mm short nap)



Cotton Pads



Paint Brush
(acrylic)

Instructions for use:

Protect or Renew; Marble, Granite, Varnished wood, HPL, PVC or Vinyl laminate and Melamine. Creates an easy-to-clean, anti-scratch surface that is resistant to UV Discoloration, HF (Hydrofluoric Acid), Hydrochloric Acid, and Citric Acid.

Wipe Application; 1. Clean the surface 2. Sterilize the surface 3. Apply via the cotton pad an even layer 4. Let it cure.

Spray Application; Use an HVLP (High Volume Low Pressure) spray gun with 60–80% transfer efficiency. Fit the spray gun with a 1.0-1.3 mm fluid tip. Set air pressure to 20–30 psi.

Preparation Steps:

1. Stir the coating thoroughly for 30 seconds before use.
2. Prior to application, strain the mixed coating through a suitable paint filter (e.g., 190–250 µm) to ensure a clean, defect-free spray.
3. Wash and decontaminate the surface.
4. Wet sand / scuff using 1500–2000 grit sandpaper.
5. Mask off any parts not to be coated.
6. Ensure environmental conditions are below 65% humidity.
7. Perform a final clean using 100% acetone.
8. Wipe with a tack cloth to remove any dust or lint.

Application Procedure:

1. Spray a light, even coat. Allow a 5-minute flash-off time, or until outgassing stops.
2. Apply a second coat. Allow to flash off for at least 15 minutes, or until outgassing stops.
3. Unmask carefully before the coating fully cures.

Curing:

Tough Dry 5min, Hard Dry 2 Hours, 85% Cured 12 Hours, 100% Cured 5 Days

Refer to the TDS/SDS for more information.

NANO-CERAMIC®

WWW.NANO-CERAMIC.COM THE NEXT GENERATION COATINGS



The Leader in Durability

Did you know that our Thin film Coatings are made from pure silica, which is one of the most common elements on Earth?

Dealer