

NANO-CERAMIC®



WWW.NANO-CERAMIC.COM INDUSTRIAL PROTECTIVE COATINGS



Military/Navy Permanent Coating Systems

What makes NANO-CERAMIC Permanent Coating System so durable?

NANO-CERAMIC permanent coating system is the latest generation of protective coating which transforms paint into a hard ceramic, providing superior scratch resistance and near-permanent protection for all exterior or interior surfaces.


NANO-CERAMIC permanent coating system is 300°C resistant and more than 4 times stronger than traditional acrylic based paint finishes, and is effectively preventing damage that would otherwise affect the appearance and integrity of the original surface.

Zero Maintenance for decades to come!

Our NANO-CERAMIC permanent coating is (non PFAS) rigorously tested by an independent testing laboratory according to the European standard for outdoor paints (EN 1504-2) please find the test report on our website.

Can NANO-CERAMIC Permanent Coating System be applied on any surface?

The NANO-CERAMIC permanent coating system can be applied directly or indirectly on all kinds of interior and /or exterior surfaces (absorbing and non-absorbing), such as concrete, steel, wood, acrylic, gypsum and many more.

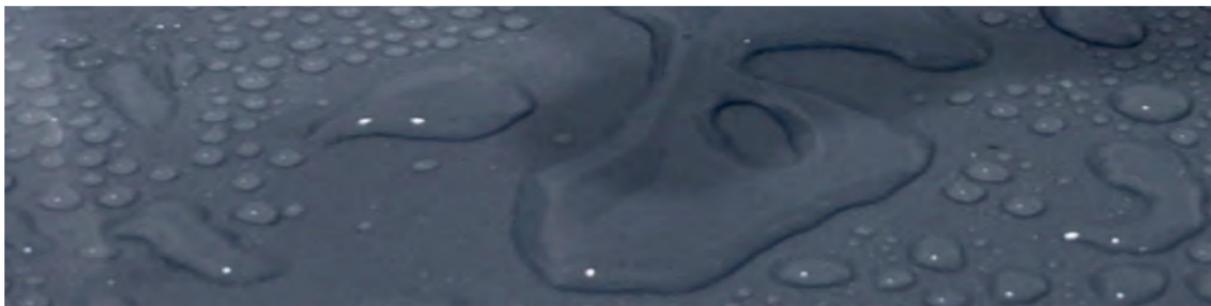

Is NANO-CERAMIC Permanent Coating System self-cleaning?

NANO-CERAMIC permanent coating system provides a permanent hydrophobic surface that is self cleaning, easier to clean and stays cleaner longer as water and dirt can not penetrate the ceramic layer. NANO-CERAMIC permanent coating system is resistant to water vapor and water absorption.

Can our hydrophobic coatings increase acceleration time and speed while simultaneously reducing fuel consumption?

Yes, the superhydrophobic surface has a good drag reduction effect, and the maximum drag reduction rate is up to 23.4%.


In a new analysis from IPTEK ITS 2023 concerning Drag Reduction, the following conclusions have been obtained. It was found that there was an increase in acceleration due to drag reduction on the ship model treated with a superhydrophobic coating, showing a 31% improvement compared to the non-coated surface and a 27% improvement compared to a conventionally anti-fouling coated surface.

As published in the International Journal of Marine Engineering Innovation and Research. Click [here](#) for the IPTEK analyses.

Other paints are simply not suitable for longterm harsh outdoor environments.

In order to avoid poorly maintained properties (concrete rot, chipped and weathered paint, etc) for the next decades, our Permanent Coating System is simply the best solution to keep the value of your investment in place.

Superior in Color & Gloss Retention

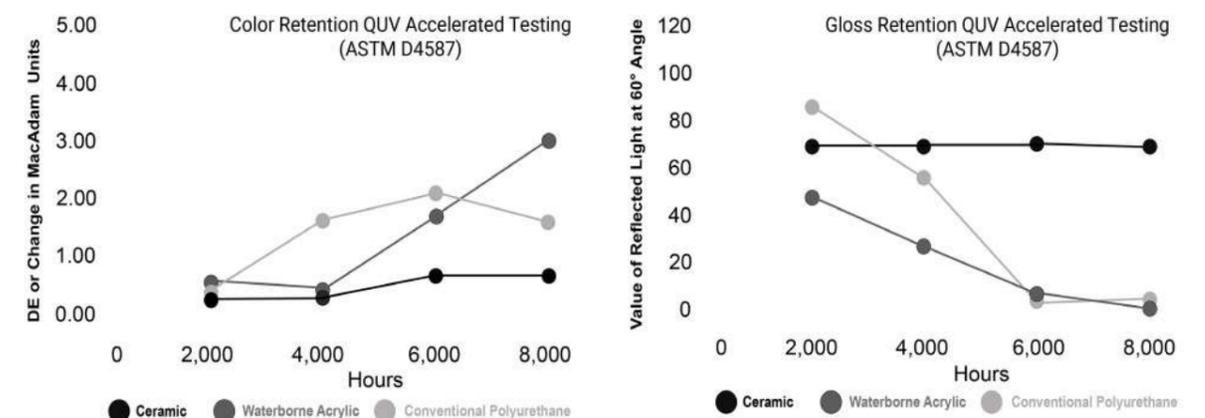

A special selection of high grade tinting chemicals computerized dispersed in a superior ceramic resin.

Conventional gelcoats are a mixture with Epoxy or Polyurethane resins, of which the quality of resin and pigments are the most important factor in the ultimate strength. Most have a lifespan of 15 years, with hardness, color and gloss retention (sun fading) and manual mixing towards consistent quality being the most common problems in keeping the desired object at an aesthetically pleasing level.

Quality Comparison of paints technologies


In case written in bold font it means existing shortcomings in quality.

Characteristics	Acrylic Latex walls ceilings	Acrylic walls floors	Epoxy floors	Polyurethane waterproofing	CERAMIC® all surfaces
Primer	Yes	Yes	Yes	Yes	No
Adhesion Strength	Poor	Poor	Poor	Poor	Excellent
Cross Cut Test	Poor	Poor	Good	Poor	Excellent
Abrasion Resistance	Poor	Poor	Average	Poor	Excellent
UV Radiation Resistance	Average	Average	Poor	Good	Excellent
Artificial Atmospheric Agents	Poor	Poor	Good	Good	Excellent
Colour Retention	Average	Average	Poor	Poor	Excellent
Gloss Retention	Poor	Poor	Poor	Poor	Excellent
Chemical Resistance	Good	Good	Good	Poor	Excellent
Severe Chemical Attack	Poor	Poor	Average	Poor	Excellent
Temperature Resistance	60°C	91°C	177°C	263°C	300°C
Thermal Shock Resistance	Good	Good	Poor	Good	Excellent
Carbon Dioxide Permeability	Poor	Poor	Good	Poor	Excellent
Permeability water vapour	Average	Average	Good	Average	Excellent
Water Absorption Rate	5-15%	1%	2%	3%	0%
Aging at 70°C	Poor	Poor	Good	Average	Excellent
Adhesion Strenght Pull-off	Poor	Average	Good	Poor	Excellent
Impact Resistance	Poor	Average	Good	Poor	Excellent
Anti-Graffiti	No	No	No	No	Yes
Anti-Termite (Wood)	No	No	No	No	Yes
Hydrophobic Self Cleaning	No	No	No	No	Yes
Easy to Clean	No	No	No	No	Yes
Total Solar Reflectance (TSR)	60 (white)	60 (white)	60 (white)	60 (white)	88 (white)
Expected Lifetime in Years	<7	<7	<5-15	<5-15	15-30+

Ceramic Coating & Paint System

If you have a custom color, the dyeing machine automatically chooses between SI11 Transparent or SI21 Medium White

This ensures the highest quality of the final mix in combination with the most economical use of color pigments.

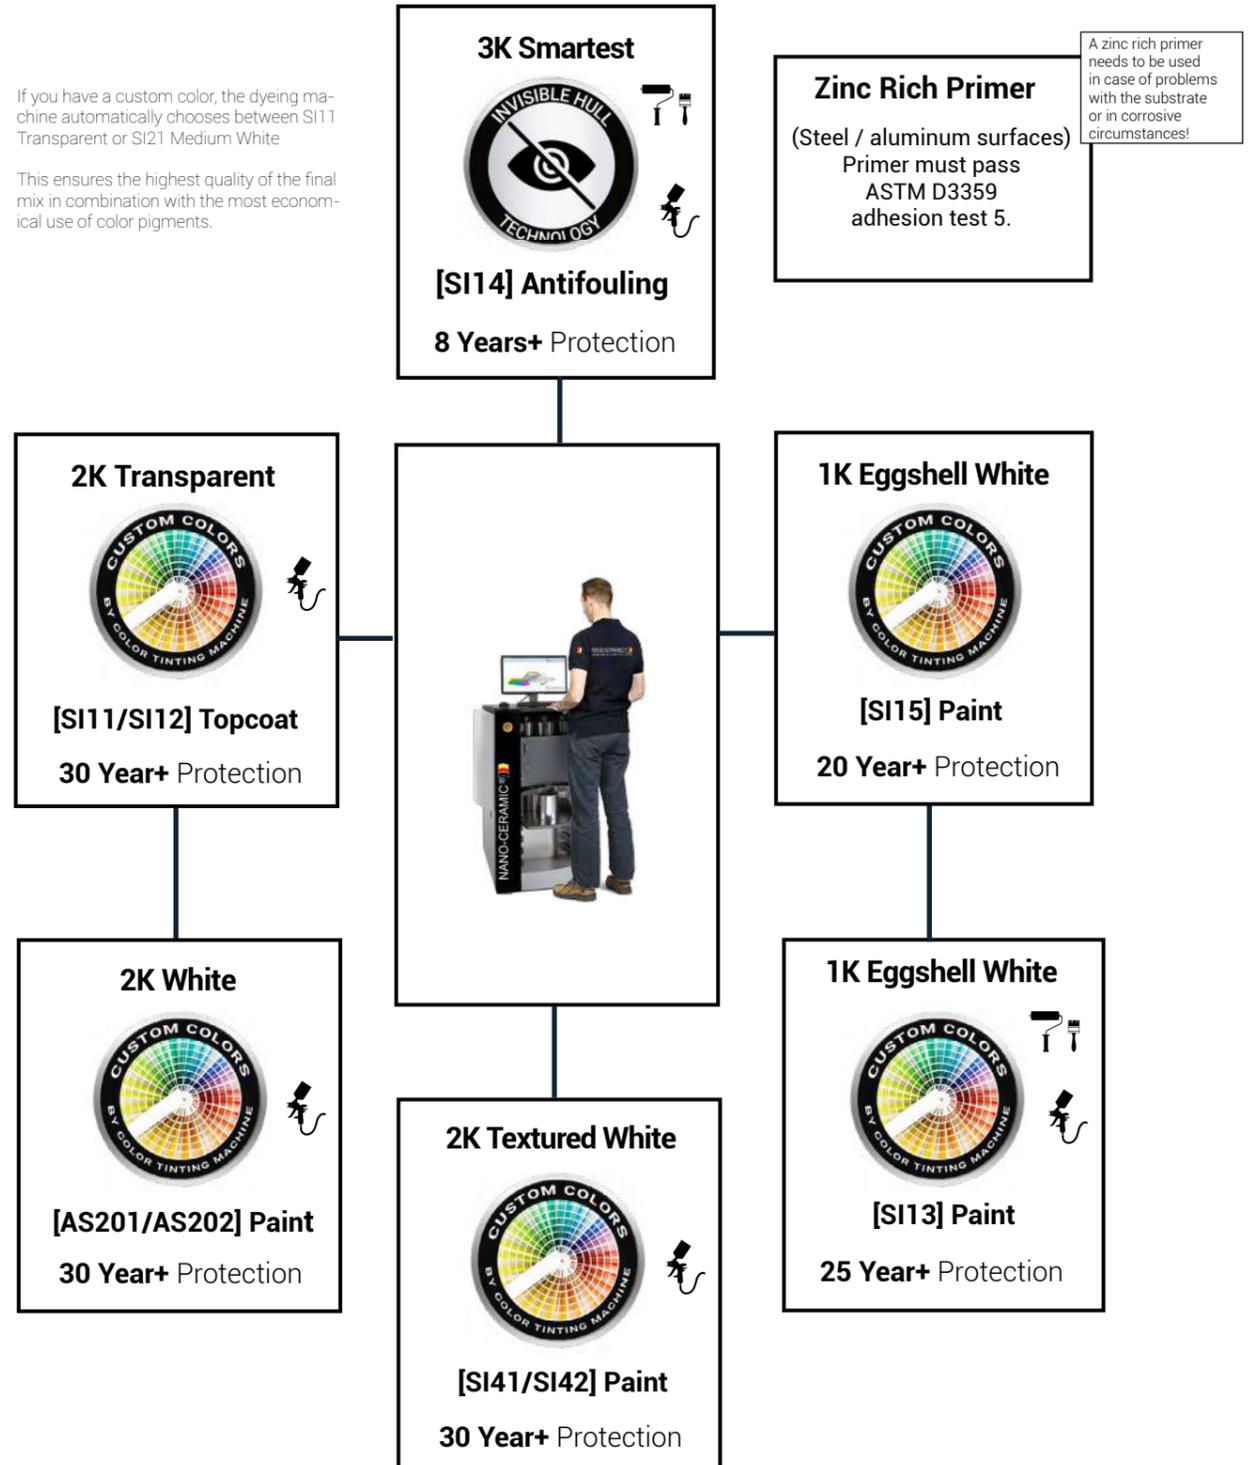

SI11/SI12 2-Component (2K)

Topcoat Transparent for glossy or matte surfaces

Article Nr	: SI112000 2 L / 1.900 g Transparent Gloss SI122000 2 L / 2.000 g Transparent Matte
Consumption	: 3 layers +/- 270 g/m ² - 285 ml/m ² 75 micron = 7 m ²
Reachable area	: 2 layers +/- 180 g/m ² - 190 ml/m ² 50 micron = 14 m ² : 1 layers +/- 90 g/m ² - 95 ml/m ² 25 micron = 21 m ²
Hardness	: H9
Used for	: The system can be applied directly or indirectly on all surfaces (porous and non-porous) such as concrete, steel, wood, acrylic, gypsum, painted or unpainted surfaces, indoors, or outdoors.
Application area	: Buildings, airports, offshore structures, bridges, tunnels, hotels, private housing, etc.





How to use: Page 38

SI11/SI12 is an incredibly strong 2-component paint system which forms a durable matrix of molecular bonds (transformation to ceramic) resulting in permanent protection of the surface.

Three simple steps: Clean, Dry, and Apply.

- Easily repels water, dirt, dust, and pollutants.
- This coating is permanent hydrophobic
- Restores damaged finishes and reduces cleaning intervals.
- Resistant to all kinds of chemicals and UV radiation.
- Superior anti-pollution and anti-corrosion properties.
- This coating can withstand temperatures of 300°C.
- Suitable for making walls fire retardant and is most best solution to make rooftops waterproof

Expected life duration up to 30 years+.

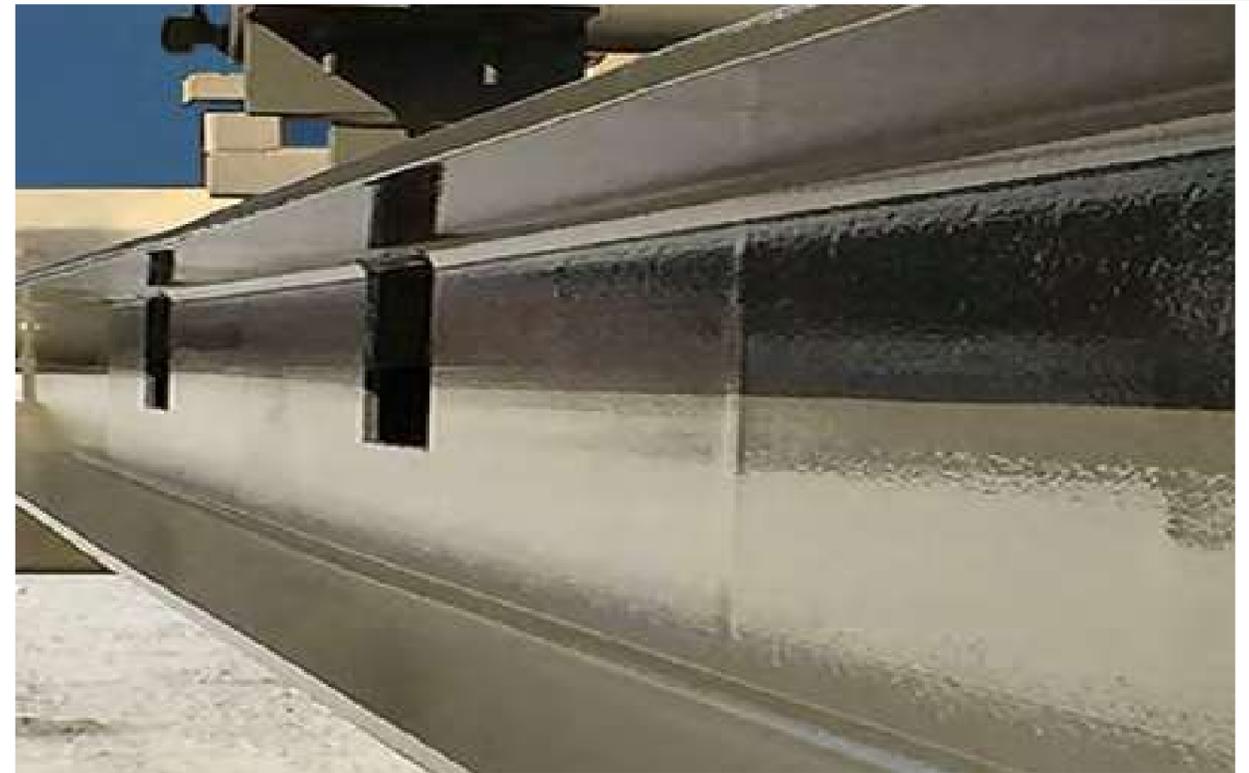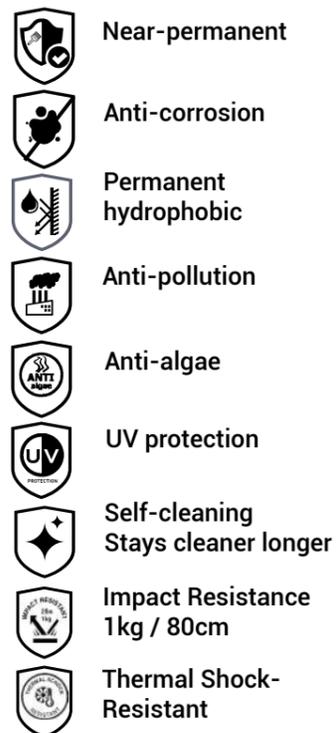

Permanent Hydrophobic - Self Cleaning



SI21/SI22 2-Component (2K)

Paint Strongest White for glossy and satin surfaces

Article Nr	: SI210000 2 L / 2.400 g SI220000 2 L / 2.500 g
Consumption	: 3 layers +/- 200 gr/m ² - 165 ml/m ² 90 micron = 12m ²
Reachable area	: 2 layers +/- 130 gr/m ² - 110 ml/m ² 60 micron = 16m ² : 1 layer +/- 65 gr/m ² - 55 ml/m ² 30 micron = 24m ²
Hardness	: H9
Used for	: The SI21 system can be applied directly or indirectly on all surfaces (porous and non-porous) such as concrete, steel, wood, acrylic, gypsum, painted or unpainted surfaces, indoors, or outdoors
Application area	: Buildings, airports, offshore structures, bridges, tunnels, ships, tanks, vehicles, etc.



How to use: Page 38




Thermal Shock - Impact Resistant

SI21/SI22 is an incredibly strong 2-component paint system which forms a durable matrix of molecular bonds (transformation to ceramic) resulting in permanent protection of the surface.

Three simple steps: Clean, Dry, and Apply.

- Easily repels water, dirt, dust, and pollutants.
- This coating is permanent hydrophobic.
- Restores damaged finishes and reduces cleaning intervals.
- Resistant to all kinds of chemicals and UV radiation.
- Superior anti-pollution and anti-corrosion properties.
- This coating can withstand temperatures of 300°C suitable for making walls fire retardant and to make rooftops waterproof

Expected life duration up to 30 years+

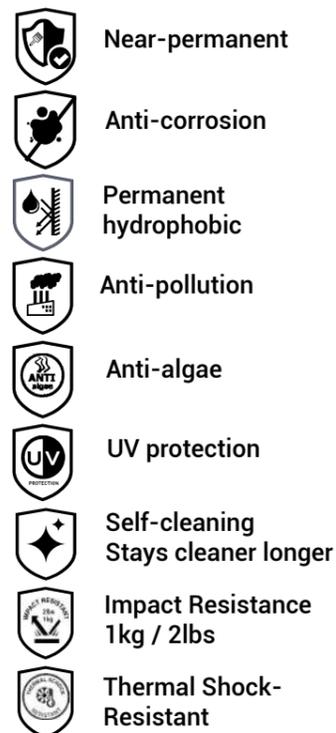

SI31 2-Component (2K)

Textured Transparent Semi Gloss antislip - high impact resistant



How to use: Page 38

Article Nr	: SI312000 2 L / 2.000 g
Consumption	: 3 layers +/- 222 g/m ² - 222 ml/m ² 90 micron = 9 m ²
Reachable area	: 2 layers +/- 111 g/m ² - 111 ml/m ² 60 micron = 18 m ²
	: 1 layer +/- 74 g/m ² - 74 ml/m ² 30 micron = 27 m ²
Hardness	: H9
Used on	: Gelcoat, fiberglass, steel, aluminium, : plastics, wood, virtually any surface.
Application area	: Buildings, marine, offshore structures, bridges, etc

SI31 is a clear solvent-based ceramic coating, linked with a ceramic activator, available in semi-gloss and includes sprayable nano particles.

Known for its exceptional durability, this coating easily applies to any organic surface without needing a primer. Its textured design makes it perfect for anti-slip needs.

- Easily repels water, dirt, dust, and pollutants.
- This coating has an outstanding hydrophobic effect.
- Resistant to all kinds of chemicals and UV radiation.
- This coating can withstand temperatures of 300°C.
- Zero absorption, waterproof, insulation and heat rejecting

Expected life duration up to 30 years+

-  **Easy to apply
Repaintable**
-  **Cut maintenance**
-  **Anti-water spot
Anti-corrosion**
-  **Permanent
hydrophobic**
-  **Self-cleaning
stays cleaner longer**
-  **Anti-scratch**
-  **Visibility
safety**
-  **Protects your
investment**
-  **Impact Resistance
1kg / 80cm**
-  **Saves 10-20% on
electricity**



Anti Slip - Noise Reduction



SI14

3-Component (3K)

The Smartest Antifouling

black/red/blue/grey



Article Nr	: SI141000-BK-RD-BL-GR 1 L / 1.090 g : SI144000-BK-RD-BL-GR 4 L / 4.300 g
Consumption	: 2 layers 308 g/m ² - 286 ml/m ² = 200 micron / 14 m ²
Reachable area	: 1 layers 154 g/m ² - 143 ml/m ² = 100 micron / 28 m ²
Hardness	: H7
Used for	: Gelcoat, fiberglass, steel, aluminium, plastics, wood
Application area	: Marine Antifouling (humid environments)

How to use: Page 38

SI14 is a super strong strong and sleek 3-component antifouling system which forms a durable matrix of molecular bonds (transformation to ceramic) resulting in a superior protection of the surface.

The coating tricks microorganisms into perceiving plain water in front of them, rather than a ship's hull; as a result they often make no attempt to settle on the hull.

Due to a combination of hydrophobic silicone and hydrophilic polymers they can not longer clearly recognize the surface, nor distinguish the hull unambiguously from sea water.

Three simple steps: Clean, Dry, and Apply.

- Easily releases algae
- Super smooth self-polishing surface
- Organic Copper and Tin Non Biocidal release
- This coating has an outstanding hydrophobic effect.
- Resistant to all kinds of chemicals and UV radiation.
- This coating can withstand temperatures of 300°C

Expected life duration up to 8 year+

-  **Easy to apply**
Repaintable
-  **Cut maintenance costs**
-  **Organic Copper and Tin**
Non Biocidal
-  **Super Sleek Surface**
Algae release <6knots
-  **Permanent hydrophobic**
-  **Self-cleaning**
stays cleaner longer
-  **Save fuel**
-  **Impact Resistance**
1kg / 2lbs
-  **Thermal Shock-Resistant**



Super Smooth - Saves Fuel



SI13

2-Component (2K)

Paint Coolest White for egg-shell surfaces



Article Nr : SI132000 2 L / 3.300 g White

How to use: Page 38

Consumption : 2 layers +/- 235 g/m² - 143 ml/m² 90 micron = 14 m²

Reachable area : 1 layer +/- 118 g/m² - 72 ml/m² 45 micron = 28 m²

Hardness : H7

Used for : The SI13 system can be applied directly or indirectly on all surfaces (porous and non-porous) such as concrete, steel, wood, acrylic, gypsum, painted or unpainted surfaces, walls, ceilings indoors, or outdoors


Application area : Buildings, offices airports, offshore structures, bridges, tunnels, hotels, private housing, etc.

SI13 is an incredibly strong 2-component paint system which forms a durable matrix of molecular bonds (transformation to ceramic) resulting in permanent protection of the surface.

Three simple steps: Clean, Dry, and Apply.

- Easily repels water, dirt, dust, and pollutants.
- This coating has an outstanding hydrophobic effect.
- Restores damaged finishes and reduces cleaning intervals.
- Resistant to all kinds of chemicals and UV radiation.
- Superior anti-pollution and anti-corrosion properties.
- This coating can withstand temperatures of 300°C suitable for making walls fire retardant and to make rooftops waterproof.

Expected life duration up to 25 year+

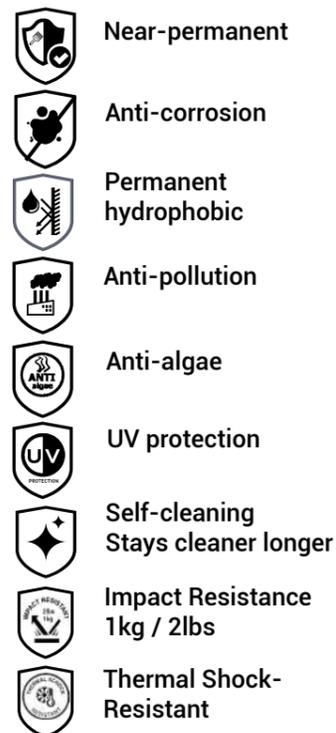

Easy to clean - Egg-shell



SI15

1-Component (1K)

Paint Coolest White for egg-shell surfaces



How to use: Page 38

Article Nr : SI152000 2 L / 3.000 g White

Consumption : 2 layers +/- 235 g/m² - 143 ml/m² 90 micron = 14 m²

Reachable area : 1 layer +/- 118 g/m² - 72 ml/m² 45 micron = 28 m²

Hardness : H6

Used for : The SI15 system can be applied directly or indirectly on all surfaces (porous and non-porous) such as concrete, steel, wood, acrylic, gypsum, painted or unpainted surfaces, walls, ceilings indoors, or outdoors


Application area : Buildings, offices airports, offshore structures, bridges, tunnels, hotels, private housing, etc.

SI15 is an incredibly strong 1-component paint system which forms a durable matrix of molecular bonds (transformation to ceramic) resulting in permanent protection of the surface.

Three simple steps: Clean, Dry, and Apply.

- Easily repels water, dirt, dust, and pollutants.
- This coating has an outstanding hydrophobic effect.
- Restores damaged finishes and reduces cleaning intervals.
- Resistant to all kinds of chemicals and UV radiation.
- Superior anti-pollution and anti-corrosion properties.
- This coating can withstand temperatures of 300°C suitable for making walls fire retardant and to make rooftops waterproof

Expected life duration up to 20 years+

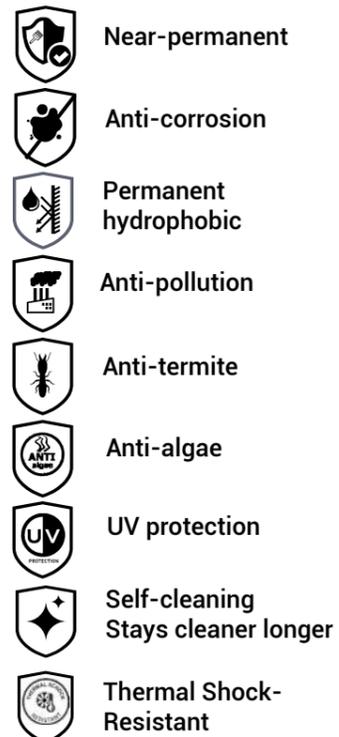

Easy to clean - Egg-shell



Color mixing has never been so easy!!!

X- SMART is the modular version of the acclaimed dispenser series, extremely cost-effective and easy to operate, with a low maintenance

This color mixer has a robust and tubeless design, built with a patented pump technology (to reduce waste) and identical features, making it a highly advanced dispenser, ideally suited to reduced capacity.



Prisma-RT is a cloud-based innovative mobile color application compatible with the X-SMART dispenser. It brings the best of wireless technology without the associated investment costs in hardware.

Customers do not have to provide computers and other accessories or set up servers, eliminating the need for complicated and time-consuming installation and configuration.

This smart Prisma-RT device helps to fix prices and taxes and can print labels via Wi-Fi.



X-SMART Stabilizer plates



16 High Grade Coloring chemicals



Titanium White
Masstone
Tint
844-0061 4 L



Quinacridone Red
Masstone
Tint
844-0451 1 L



Scarlet Red
Masstone
Tint
844-0526 1 L



Lead Free Orange
Masstone
Tint
844-0982 1 L



Trans Red Oxide
Masstone
Tint
844-1054 1 L



Red Oxide
Masstone
Tint
844-1063 1 L



Burnt Umber
Masstone
Tint
844-1352 1 L



Trans Yellow Oxide
Masstone
Tint
844-1852 1 L



Yellow Oxide
Masstone
Tint
844-1863 1 L



Lead Free Med Yellow
Masstone
Tint
844-2555 1 L



Yellow
Masstone
Tint
844-2826 1 L



Organic Yellow
Masstone
Tint
844-2852 1 L



PHTHALO Green
Masstone
Tint
844-5558 1 L



Quinacridone Violet
Masstone
Tint
844-9451 1 L



Lamp Black
Masstone
Tint
844-9955 1 L



PHTHALO BLUE
Masstone
Tint
844-7262 1 L

Color card

Other colors need minimal 100 kg

Residential

SI13 White Egg-Shell (Flat Finish) 15/25 (20/60°)	SI41 Textured White Semi Gloss 41/69 (20/60°)
SI15 White Egg Shell (Flat Finish) 18/28 (20/60°)	SI42 Textured White Matte 11/21 (20/60°)
SI21 White Gloss 49/77 (20/60°)	
SI22 White Satin 33/59 (20/60°)	

Wood

SI11 Transparent Gloss 51/78 (20/60°)
SI12 Transparent Matte 11/21 (20/60°)

Industrial

SI11 Transparent Gloss 51/78 (20/60°)
SI21 White Gloss 49/77 (20/60°)
SI22 White Satin 33/59 (20/60°)

Marine

SI12 Transparent Matte 11/21 (20/60°)
SI41 Textured White Semi Gloss 41/69 (20/60°)
SI42 Textured White Matte 11/21 (20/60°)

Military

SI31 Textured Transparent Semi Gloss 41/69 (20/60°)
SI33 Textured Black Semi Gloss 41/69 (20/60°)

Antifouling

SI14 Color 3141 (20/60°)

What is NANO-CERAMIC UVA Topcoat?

NANO-CERAMIC® UVA Topcoat is a revolutionary low-VOC, non-PFAS, self-leveling protective coating system that forms an ultra-hard, glass-like hydrophobic barrier—ideal for high-performance marine environments.

Specifically engineered for extreme durability and a sleek, high-gloss finish, UVA Topcoat delivers exceptional resistance to saltwater, intense UV exposure, biofouling, and harsh marine chemicals like hydrofluoric acid (HF), hydrochloric acid, and citric acid—all while remaining completely safe and compliant for onboard use (Food contact safe).

Powered by advanced nanotechnology, UVA Topcoat extends the lifespan of marine surfaces by protecting polyester, epoxy, polyurethane, and acrylic resins steel, aluminum, composites, and wood from corrosion, surface breakdown, and environmental wear. —making it an exceptionally versatile solution for virtually any surface.

Why UVA Topcoat is a Game-Changer in Marine Protection?

For decades, protective coatings like epoxy, polyurethane (PU), and acrylic have been the industry standard. However, they all share a critical weakness—UV degradation. Prolonged exposure to sunlight causes these coatings to yellow, crack, and deteriorate, leading to costly maintenance and premature failures.

Where can UVA Topcoat be applied in Marine use?

UVA Topcoat is highly versatile and suitable for a wide range of marine applications:


- Yachts & Boats – Hulls, decks, topsides, and superstructures
- Speedboats – UV protection and ultra-slick finish for high-performance watercraft
- Marine Infrastructure – Docks, piers, pontoons, and submerged structures
- Ship Interiors – Tables, countertops, cabins, walls, and decorative panels
- Commercial Vessels – Outer hulls, ballast tanks, walkways, and engine rooms
- Antifouling Protection – Ideal for vessels in constant motion or those stored on land

Compatible with both new builds and retrofits, UVA Topcoat adapts to various marine substrates and operating conditions with ease.

Can our hydrophobic coatings boost speed and cut fuel use?

Yes—our superhydrophobic sleek surface reduces drag by up to 23.4%, leading to 31% faster acceleration compared to uncoated surfaces and 27% faster than conventional antifouling coatings (Source: IPTEK ITS, 2023).

How it Works

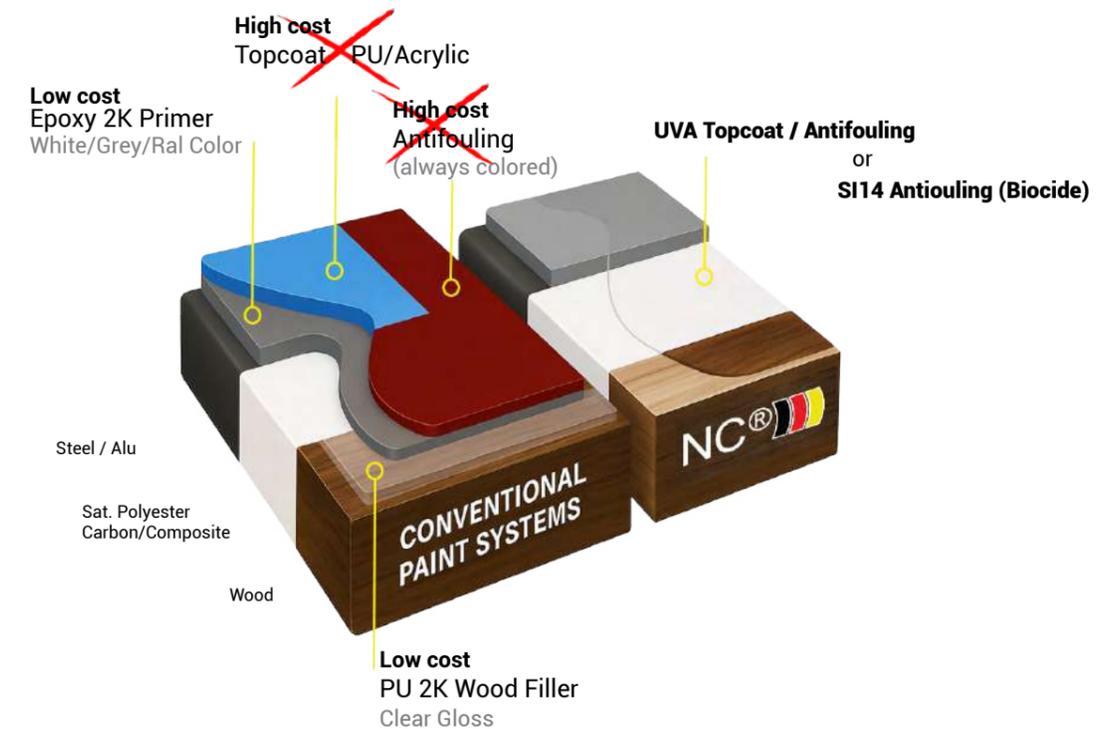

Superior Performance at the Lowest Cost.

UVA Topcoat isn't just another coating—it's a next-generation solution that replaces complex and expensive multi-layer systems with a single, high-performance layer.

By applying directly over low-cost primers, UVA Topcoat eliminates the need for expensive finishing coats. Its smart chemistry and simplified process make traditional topcoat systems outdated by comparison.

Whether for industrial, marine, infrastructure, or decorative use, UVA Topcoat simplifies your process and multiplies your value—proving that true performance doesn't have to come at a high price.

Freedom in Protection Years

Long-Lasting Protection, Layer by Layer

A single 6 µm (micron) layer applied using HVLP spray technology can provide up to 8 years of protection. Need more durability? Just add more layers—it's that simple.

Apply wet-on-wet: once the first coat flashes off (dry to the touch but still tacky), you can immediately apply the next. This method prevents trapped gases and creates a seamless, chemical-resistant film with hydrophobic properties—making surfaces easier to clean and maintain.



Coverage & Application Efficiency

UVA Topcoat is engineered for maximum efficiency with minimal material use—delivering high-performance protection at a fraction of the volume required by traditional coatings.

Recommended usage is approximately ±12.5 g/m² per layer (by wipe or spray), resulting in a film thickness of around 6 microns, with one liter covering up to 80 m².

Color Tinting Option for Marine Applications


For customized aesthetics, UVA Topcoat can be tinted using our colorants on page 22-23. These high-performance, solvent-free pigments provide long-lasting color stability and UV resistance—perfect for marine environments where both protection and appearance matter. Ideal for yachts, decks, interiors, or any visible surface requiring a durable, colored finish without compromising the coating's hydrophobic and chemical-resistant properties.

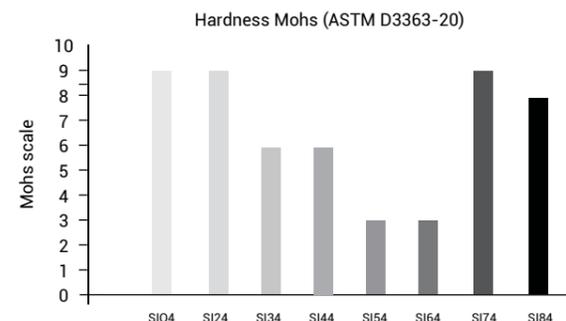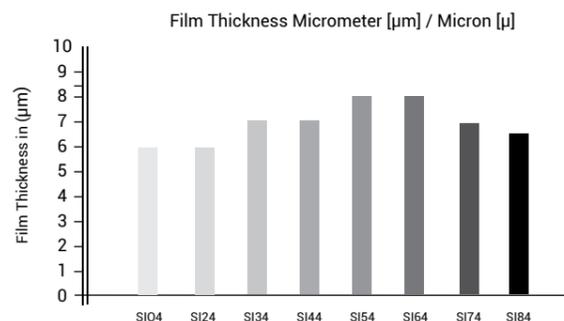

Quality Comparison of paints technologies

In case written in bold font it means existing shortcomings in quality.

Characteristics	Acrylic Latex walls ceilings	Acrylic walls floors	Epoxy floors	Polyurethane waterproofing	UVA Topc all surfaces
Primer	Yes	Yes	Yes	Yes	No
Adhesion Strength	Poor	Poor	Poor	Poor	Excellent
Cross Cut Test	Poor	Poor	Good	Poor	Excellent
Abrasion Resistance	Poor	Poor	Average	Poor	Excellent
UV Radiation Resistance	Average	Average	Poor	Good	Excellent
Artificial Atmospheric Agents	Poor	Poor	Good	Good	Excellent
Colour Retention	Average	Average	Poor	Poor	Excellent
Gloss Retention	Poor	Poor	Poor	Poor	Excellent
Chemical Resistance	Good	Good	Good	Poor	Excellent
Severe Chemical Attack	Poor	Poor	Average	Poor	Excellent
Temperature Resistance	60°C	91°C	177°C	263°C	300°C
Thermal Shock Resistance	Good	Good	Poor	Good	Excellent
Carbon Dioxide Permeability	Poor	Poor	Good	Poor	Excellent
Permeability water vapour	Average	Average	Good	Average	Excellent
Water Absorption Rate	5-15%	1%	2%	3%	0%
Aging at 70°C	Poor	Poor	Good	Average	Excellent
Adhesion Strength Pull-off	Poor	Average	Good	Poor	Excellent
Impact Resistance	Poor	Average	Good	Poor	Excellent
Anti-Graffiti	No	No	No	No	Yes
Anti-Termite (Wood)	No	No	No	No	Yes
Hydrophobic Self Cleaning	No	No	No	No	Yes
Easy to Clean	No	No	No	No	Yes
Total Solar Reflectance (TSR)	60 (white)	60 (white)	60 (white)	60 (white)	88 (white)
Expected Lifetime in Years	<7	<7	<5-15	<5-15	8/16/24

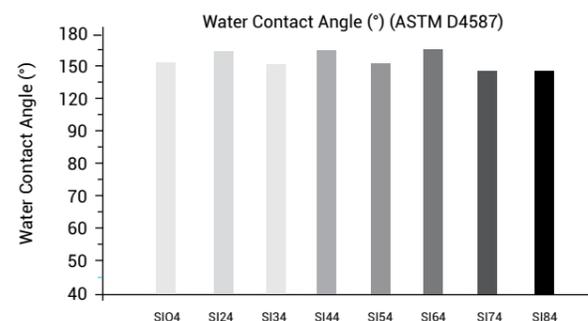

SIO4

1-Component (1K)

H9 UVA Topcoat Transparent for glossy surfaces

Article Nr	: SIO41LUVA 1 L / 920 g SIO405UVA 500 ml / 460 g
Consumption	: 3 layers +/- 34.6 g/m ² - 37.5 ml/m ² 18 micron = 20 m ²
Reachable area	: 2 layers +/- 23.0 g/m ² - 25.0 ml/m ² 12 micron = 40 m ²
	: 1 layer +/- 11.5 g/m ² - 12.5 ml/m ² 6 micron = 80 m ²
Hardness/Cupping	: H9 / Flexibility ISO 1520 >21mm
Used for	: Fiberglass, steel, aluminium, plastics, wood
Application field	: Marine, exteriors, antifouling, interiors

SIO4 is an incredibly strong 1-component high performance coating and paint system which forms a durable matrix of molecular bonds (transformation to ceramic) resulting in permanent protection of the surface.

Three simple steps: Clean, Dry, and Apply.

- Easily repels water, dirt, dust, and pollutants
- On the ship's hull, for higher speed and lower fuel use.
- This coating is permanent hydrophobic
- Restores damaged finishes and reduces cleaning intervals.
- Resistant to all kinds of chemicals and UV radiation.
- Superior anti-pollution and anti-corrosion properties.
- This coating can withstand temperatures of 300°C
- Superb adhesion even on glass or stainless steel.
- Can be sprayed multilayered.
- Transparent, Opaque, solid-color or vibrant, transparent color finishes.


Expected life duration 8-16 or 24 Years (layer thickness)



How to use: Page 39



How does it look visually?



- Save fuel
Higher speeds
- Near-permanent
- Anti-corrosion
- Permanent hydrophobic
- Anti-pollution
- Anti-algae
- UV protection
- Self-cleaning
Stays cleaner longer
- Impact Resistance
1kg / 80cm
- Thermal Shock-Resistant



Higher Speeds - Fuel Saving



SI24

1-Component (1K)

H9 UVA Topcoat Transparent for matte surfaces

Article Nr	: SI241LUVA 1 L / 920 g SI2405UVA 500 ml / 460 g
Consumption	: 3 layers +/- 34.6 g/m ² - 37.5 ml/m ² 18 micron = 20 m ²
Reachable area	: 2 layers +/- 23.0 g/m ² - 25.0 ml/m ² 12 micron = 40 m ²
	: 1 layer +/- 11.5 g/m ² - 12.5 ml/m ² 6 micron = 80 m ²
Hardness/Cupping	: H9 / Flexibility ISO 1520 >21mm
Used for	: Fiberglass, steel, aluminium, plastics, wood
Application field	: Marine, exteriors, antifouling, interiors

SI04 is an incredibly strong 1-component high performance coating and paint system which forms a durable matrix of molecular bonds (transformation to ceramic) resulting in permanent protection of the surface.

Three simple steps: Clean, Dry, and Apply.

- Easily repels water, dirt, dust, and pollutants
- On the ship's hull, for higher speed and lower fuel use.
- This coating is permanent hydrophobic
- Restores damaged finishes and reduces cleaning intervals.
- Resistant to all kinds of chemicals and UV radiation.
- Superior anti-pollution and anti-corrosion properties.
- This coating can withstand temperatures of 300°C
- Superb adhesion even on glass or stainless steel.
- Can be sprayed multilayered.
- Transparent, Opaque, solid-color or vibrant, transparent color finishes.


Expected life duration 8-16 or 24 Years (layer thickness)



How to use: Page 39



How does it look visually?



- Save fuel
Higher speeds
- Near-permanent
- Anti-corrosion
- Permanent
hydrophobic
- Anti-pollution
- Anti-algae
- UV protection
- Self-cleaning
Stays cleaner longer
- Impact Resistance
1kg / 80cm
- Thermal Shock-
Resistant



Anti Scratch - UV Resistant



UVA Topcoat Colorants

Precision Color Control – From Super-Transparent Tints to Bold, Defined Shades

As a coating manufacturer, we use advanced colorant chip technology to produce fully prepared, ready-to-use colorants that integrate seamlessly into our coating systems.

The colorant chips themselves are selected, processed, and blended by us under controlled conditions, resulting in liquid colorants with precise concentration, high transparency, and excellent stability. Our customers receive a finished colorant product and do not need to handle or process chips in any way.


Because the colorants are supplied ready to use, incorporation into our coating systems is simple and straightforward. The required amount of colorant can be added directly to the coating and mixed using standard stirring or mechanical mixing.

The colorant disperses quickly and evenly, without streaking, cloudiness, or the need for special equipment. This makes color adjustment easy and reliable, even for small batches or on-site applications.

By controlling the entire process—from coating and colorant chip selection to finished colorant production—we ensure consistent color accuracy and repeatability from batch to batch.

The colorants are specifically engineered to remain fully compatible with our high-performance binder technologies. As a result, color can be introduced without compromising transparency, gloss, durability, or chemical resistance.

The outcome is a coating system in which professional color control—from super-transparent shades to bold finishes—is achieved with minimal effort for the user: add the colorant, mix, and apply.

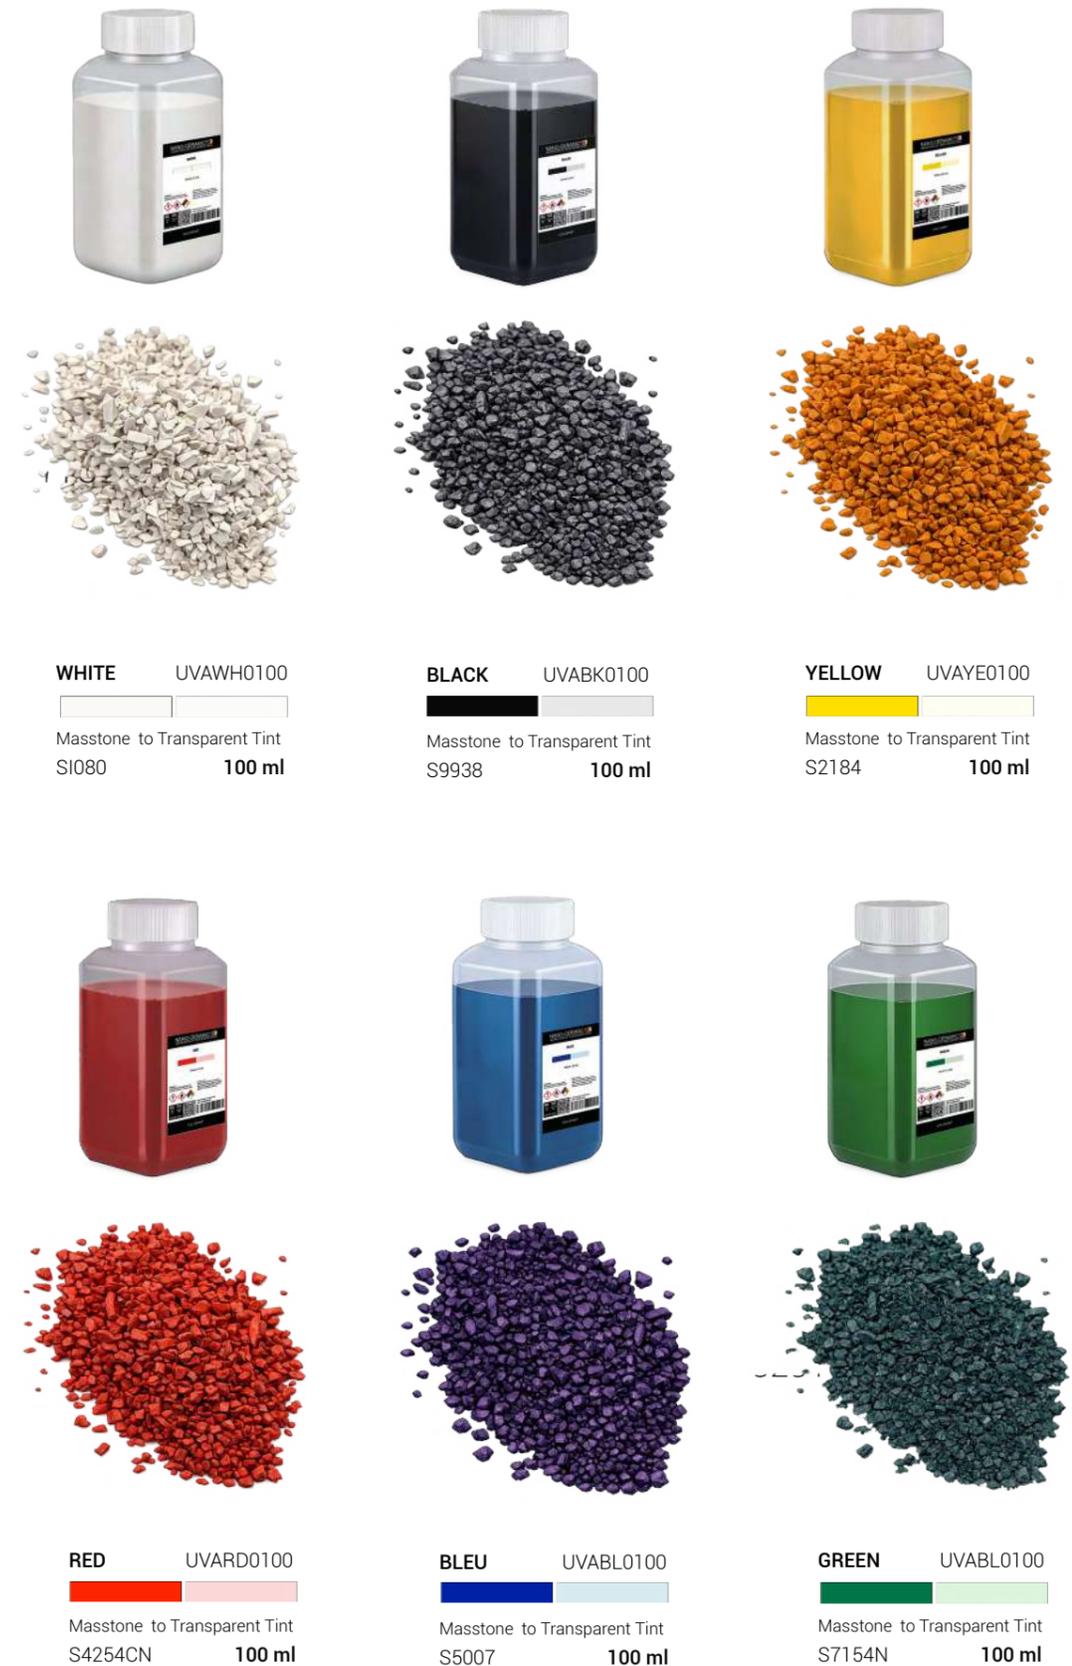

SIX1

2-Component (2K)

Primer Epoxy Polyamide

heavy duty - anti-corrosion

- Article Nr** : SIX11250-WH/GR 1.25 L / 1.45 kg SIX15000=WH-GR 5 L / 5.8 kg
Consumption : 2 layers +/- 240 g/m² - 250 ml/m² 80 micron = 5 m²
Reachable area : 1 layer +/- 120 g/m² - 125 ml/m² 40 micron = 10 m²
Hardness : H5
Colors : White, Grey or RAL (RAL Minimum Order 250 pcs 5 L)
Used on : Concrete, Steel, Aluminium, Fiberglass and other organic surfaces
Application area : Buildings, marine, airports, offshore structures, bridges

SIX1 is a solvent based epoxy polyamide primer. This primer is used for corrosion protection on concrete, stainless, galvanized, carbon and alloy steel, aluminum in corrosive conditions and has excellent adhesion to all organic substrates and to all of our ceramic topcoats. The primer can be applied at a relative humidity of 40-80% and can be painted over within 8 hours 30°C, 1 hours 60°.



Fast Repaintable



Excellent adhesion



Heavy Duty Primer - Smooth Surfacer

SIX2

2-Component (2K)

Primer Surfacer Acrylic Alkyd

smooth - surface modifier

- Article Nr** : SIX21250-WH/GR 1.25 L / 1.45 kg SIX25000-WH/GR 5 L / 5.8 kg
Consumption : 2 layers +/- 200 g/m² - 210 ml/m² 60 micron = 6 m²
Reachable area : 1 layer +/- 100 g/m² - 105 ml/m² 30 micron = 12 m²
Hardness : H3
Colors : White, Grey
Used on : Steel, aluminium, wood, fiberglass, and old paint systems.
Application area : Buildings, hotels, private housing, etc.

SIX2 High-quality 2K surfacer (two-component basecoat) for auto-refinish, marine, and industrial coating applications where a smooth surface is required. The primer has excellent adhesion to all organic substrates and to all of our ceramic topcoats. The primer can be applied at a relative humidity of 30-80% and can be painted over within 4 hours 30°C, 1 hours 60°.



Fast Repaintable



Excellent adhesion



SIX3

2-Component (2K)

Primer PU Wood Filler

surface modifier - absorption reducer

- Article Nr** : SIX31500 1.5 L / 1.4 kg
Consumption : 2 layers +/- 175 g/m² - 185ml/m² 60 micron = 8 m²
Reachable area : 1 layer +/- 115 g/m² - 95ml/m² 30 micron = 12 m²
Hardness : H4
Colors : Transparent
Used on : Wood, Natural Stone, and other organic surfaces
Application area : Buildings, marine, hotels, private housing, etc.

SIX3 is a solvent borne transparent wood filler. This primer is used as surface modification for, wood or natural stone to reduce capillary absorption and has an excellent adhesion to all organic substrates and towards one of our ceramic top coats. The primer can be applied at a relative humidity of 40-80%.



Fast Repaintable



Excellent adhesion



Wood or Natural Stone - Filler

SIX4

1-Component (1K)

Primer Acrylic Waterbased

all surfaces modifier

- Article Nr** : SIX41000-WH/GR 1L / 1.2kg SIX44000-WH/GR 4L / 4.8kg
Consumption : 2 layers +/- 240 g/m² - 200 ml/m² 60 micron = 5 m²
Reachable area : 1 layer +/- 120 g/m² - 100 ml/m² 30 micron = 10 m²
Hardness : H3
Colors : White, Grey or RAL (RAL Minimum Order 250 pcs 4 L)
Used on : Concrete, wood, drywalls and old waterbased paints
Application area : Buildings, walls and ceilings indoor or outdoor

SIX4 Acrylic Water-Based Primer is a premium, all-purpose primer-sealer with excellent adhesion, stain-blocking, and hiding power. Ideal for both interior and exterior surfaces, it bonds to glossy surfaces without sanding, effectively blocks stains, and provides a smooth foundation for any solvent-based or water-based topcoat.



Fast Repaintable



Excellent adhesion



VOC Free



SIX5 2-Component (2K)

Putty Polyester ultra smooth - sandable

Article Nr : SIX51000-WH/GR 1 kg
Colors : White, Grey
Used on : Metal, wood, fiberglass, concrete, plastics
Application area : Buildings, marine, airports, offshore structures, bridges private housing, etc.

SIX5 is a High quality 2 (two) component Epoxy base putty for auto-refinish, marine and industrial coating applications.



SOLV Thinner solvent

for all types of our ceramic paint & coating

Article Nr : SOLV0400 400 ml / 345 g SOLV2000 2L / 1.760 g SOLV5000 5 L / 4.400 g



All our paints and coatings are ready to use, for certain spray applications, especially dark colors who require more than average color pigments, it may be necessary to use a little thinner solvent to achieve optimum flowability.

RETA/ACCL Retarder Accelerator


slow down flash time or speed up curing

Article Nr : RETA0400 400 ml / 345 g ACCL0200 200 ml / 180 g



If your application needs a longer flash time (for example, in hot temperatures) to build up the layer with a second or third coat, you can add the RETA Retarder. If you want to speed up the curing process, you can add the ACCL Accelerator. It can reduce curing time by 30–70% compared to uncatalyzed systems, and full hardness can develop 1.5–2x faster.

Scan QR Code for TDS and SDS

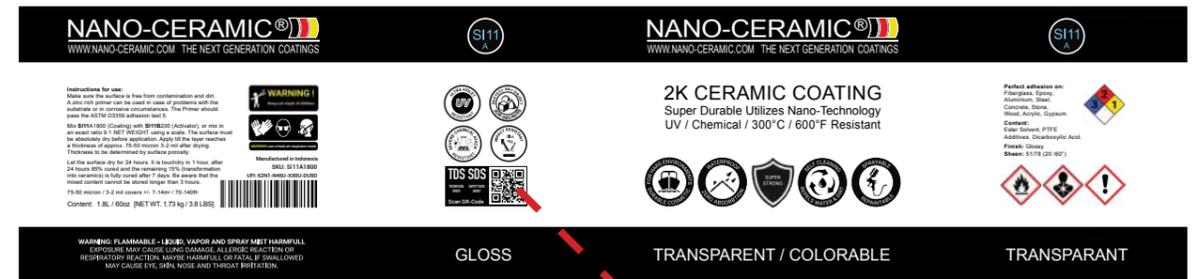

(Test) Results



Videos Application



How to use our Permanent Coating System:

These products can be stored for up to 24 months (*in a dry, temperature-stable dark environment*)

Processing Temperature:

Ambient temperature: 5-30°C
Avoid direct sunlight, Rain and /or high humidity.

IMPORTANT:

Before you use a NANO-CERAMIC product, please make sure you wear suitable protection gear. We always recommend using a paint suit, respirator mask and latex or nitrile gloves.

Outfit/Applicators:



Application information

The SI11/SI12/SI21/SI14/SI31 coatings can be applied directly or indirectly on all surfaces (porous and non-porous) such as concrete, steel, wood, fiberglass, acrylic, gypsum, painted or unpainted surfaces, indoors, or outdoors. The surface underneath will be superbly protected against erosion and corrosion and will stay cleaner longer. Cleaning becomes quicker, easier, and less expensive, as special cleaning agents are unnecessary.

Preparation

Make sure the surface is free from any contamination and dirt. A zinc rich primer can be used for ferrous metals that are exposed to coastal and marine environments or in case of problems with the substrate.

Warning the surface must be completely dry before application and must stay dry for 6 hours after application after application!

The 2-Component Permanent Coating System

Mix the can SI11B-SI12B-SI21B-SI31B with the can of SI11A-SI12A-SI21A-SI31A by pouring can B into can A, or measure **exactly by NET WEIGHT** in a ratio of 9:1 **by using a scale** and **mix very well**.

Mix SI14A2800 with SI14C0800 with by pouring can C into can A, or measure **exactly by NET WEIGHT** in a ratio of 7:2 **by using a scale** and **mix very well**, then add the entire content of SI14B0400 or measure **exactly by NET WEIGHT** in a ratio of 7:1 (compared to SI14A2800) **by using a scale** and **mix very well**. Carefully pour the mixed contents into a professional paint sprayer, and spray in thin layers until the surface reaches your desired thickness. Depending on the surface, material and structure, different application techniques can be used (such as paint rollers or brushes). Let the surface dry for 24 hours. It is touch-dry in 1 hours, after 4 hours, 85% cured, and the remaining 15% (transformation into ceramics) is fully cured after 7 days. Be aware that the mixed contents cannot be stored longer than 3 hours. If have orange peel you may wet /sand the surface with P1500 and after P2000 and polish with One Step Polish till high shine. The surface can simply be maintained with a high pressure washer at 80 bar using our biologically degradable Reactivating Shampoo. The surface can simply be maintained with a high pressure washer at 80 bar using our biologically degradable Reactivating Shampoo.

Tool cleaning and Thinner solvent

The individual components, as well as the mixing system of the paint sprayer, can be diluted and cleaned using our solvent. All of our paints and coatings are ready to use, for certain spray applications, especially dark colors which require more color pigment than average, it may be necessary to use our SOLV thinner solvent to achieve optimal flowability.

How to use our UVA Coating System:

These products can be stored for up to 24 months (*in a dry, temperature-stable dark environment*)

Processing Temperature:

Ambient temperature: 5-30°C
Avoid direct sunlight, Rain and /or high humidity.

IMPORTANT:

Before you use a NANO-CERAMIC product, please make sure you wear suitable protection gear. We always recommend using a paint suit, respirator mask and latex or nitrile gloves.

Outfit/Applicators:



Instructions for use:

Protect or Renew; Marble, Granite, Varnished wood, HPL, PVC or Vinyl laminate and Melamine. Creates an easy-to-clean, anti-scratch surface that is resistant to UV Discoloration, HF (Hydrofluoric Acid), Hydrochloric Acid, and Citric Acid.

Wipe Application; 1. Clean the surface 2. Sterilize the surface 3. Apply via the cotton pad an even layer 4. Let it cure.

Spray Application; Use an HVLP (High Volume Low Pressure) spray gun with 60–80% transfer efficiency. Fit the spray gun with a 1.0-1.3 mm fluid tip. Set air pressure to 20–30 psi.

Preparation Steps:

1. Stir the coating thoroughly for 30 seconds before use.
2. Prior to application, strain the mixed coating through a suitable paint filter (e.g., 190–250 µm) to ensure a clean, defect-free spray.
3. Wash and decontaminate the surface.
4. Wet sand / scuff using 1500–2000 grit sandpaper.
5. Mask off any parts not to be coated.
6. Ensure environmental conditions are below 65% humidity.
7. Perform a final clean using 100% acetone.
8. Wipe with a tack cloth to remove any dust or lint.

Application Procedure:

1. Spray a light, even coat. Allow a 5-minute flash-off time, or until outgassing stops.
2. Apply a second coat. Allow to flash off for at least 15 minutes, or until outgassing stops.
3. Unmask carefully before the coating fully cures.

Curing:

Tough Dry 5min, Hard Dry 2 Hours, 85% Cured 12 Hours, 100% Cured 5 Days
Refer to the TDS/SDS for more information.

NANO-CERAMIC®



WWW.NANO-CERAMIC.COM INDUSTRIAL PROTECTIVE COATINGS

**There is no better option than to use
NANO-CERAMIC!**



The Leader in Durability

Did you know?

*That our coatings are made
of pure silica sand, which is
the most common element
on Earth?*

Dealer