

NANO-CERAMIC®

WWW.NANO-CERAMIC.COM THE NEXT GENERATION COATINGS



Agricultural / Heavy Equipment Clean & Protect


What is NANO-CERAMIC Thin Film Coating?

NANO-CERAMIC Thin Film Coating is a revolutionary, ultra-durable, ceramic clear-coating that provides superior scratchresistance and semi-permanent protection for all vehicle finishes, paints and exterior surfaces. (PFAS Free)

What makes NANO-CERAMIC Thin Film Coating so different?



Jetpack
VideoPress

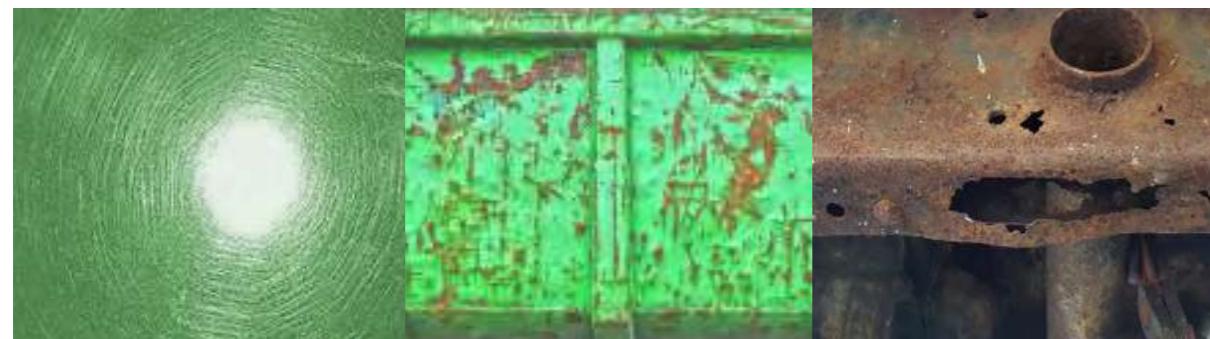

Conventional paints like acrylic urethane are simply not strong enough.



NANO-CERAMIC Thin Film Coating is completely resistant to acidic environmental substances like bird droppings, bug residue, acid rain, and tree sap, unlike your vehicle's factory paint, which can be permanently etched and damaged by these substances.

NANO-CERAMIC Thin Film Coating provides advanced protective barriers to your vehicle's surfaces, maintaining both high-gloss and matte finishes.

What are the benefits of applying NANO-CERAMIC Thin Film Coating?

NANO-CERAMIC Thin Film Coating provides vehicles with a superior, near-permanent, clear coating that is resistant to chemical etching, harder than factory paint finishes, and able to greatly reduce swirl marks and fine scratches while leaving a superior, hydrophobic surface that is easier to clean and stays cleaner longer.

Clearcoat, Glass vehicle materials can be treated with one of our NANO-CERAMIC Thin Film CERAMIC Restore the color and shine to plastic trim with advanced hydrophobic and UV protection. Even chrome, aluminum, and other metals can have added protection, as our coatings can withstand temperatures of over 1500°F



Step 1 The surface layer of factory clear coat is damaged and contaminated.



Step 2 Decontamination and polishing the clear coat to produce a smooth and even surface.



Step 3 Restoration of coating thickness with a super-durable layer of NANO-CERAMIC Thin Film





SIO3 GLOSS

Body & Windshield Protection for clearcoat / glass / chrome



Product ID : SIO3BKIT 1.7 oz 6 Micron SIO2BKIT 1.7 oz 2 Micron
Consumption : +/- 0.007 oz/ft²
Reachable area : +/- 500 ft² Body panels + 500 ft² Windshield
Used for : Clearcoat, windshields, mirrors, plastics, steel
Application field : Agricultural, Heavy Equipment

Your Fleet will stand out! These Kit-Sets contain all to make trucks an busses protected with a High-Tech ceramic layer.

- Two simple steps: Clean with our Steril Cleaner and Apply
- The original surface is protected against corrosion.
- Makes the surface anti scratch, much easier and quicker to clean, and the adhesion of dirt is reduced drastically.
- Promotes more hygienic surfaces.

This coating has an outstanding hydrophobic effect, and the surface stays cleaner longer. Cleaning intervals as well as the formation of water spots will be greatly reduced.

Lasts for 5 Years+ (1 Years on Glass)

How to use: Page 31

- Easy to apply
- Cut cleaning costs
- Anti-water spot
- Anti-corrosion
- Super hydrophobic
- Self-cleaning stays cleaner longer
- Anti-scratch
- Visibility safety
- Protects your investment

Applicator:



SIO5 MATTE

Body & Windshield Protection for clearcoat / glass / chrome



Product ID : SIO5BKIT 1.7 oz 6 Micron SIO2BKIT 1.7 oz 2 Micron
Consumption : +/- 0.007 oz/ft²
Reachable area : +/- 500 ft² Body panels + 500 ft² Windshield
Used for : Clearcoat, windshields, mirrors, plastics, steel
Application field : Agricultural, Heavy Equipment

Your Fleet will stand out! These Kit-Sets contain all to make trucks an busses protected with a High-Tech ceramic layer.

- Two simple steps: Clean with our Steril Cleaner and Apply
- The original surface is protected against corrosion.
- Makes the surface anti scratch, much easier and quicker to clean, and the adhesion of dirt is reduced drastically.
- Promotes more hygienic surfaces.

This coating has an outstanding hydrophobic effect, and the surface stays cleaner longer. Cleaning intervals as well as the formation of water spots will be greatly reduced.


Lasts for 5 Years+ (1 Years on Glass)

How to use: Page 31

- Easy to apply
- Cut cleaning costs
- Anti-water spot
- Anti-corrosion
- Super hydrophobic
- Self-cleaning stays cleaner longer
- Anti-scratch
- Visibility safety
- Protects your investment

Applicator:



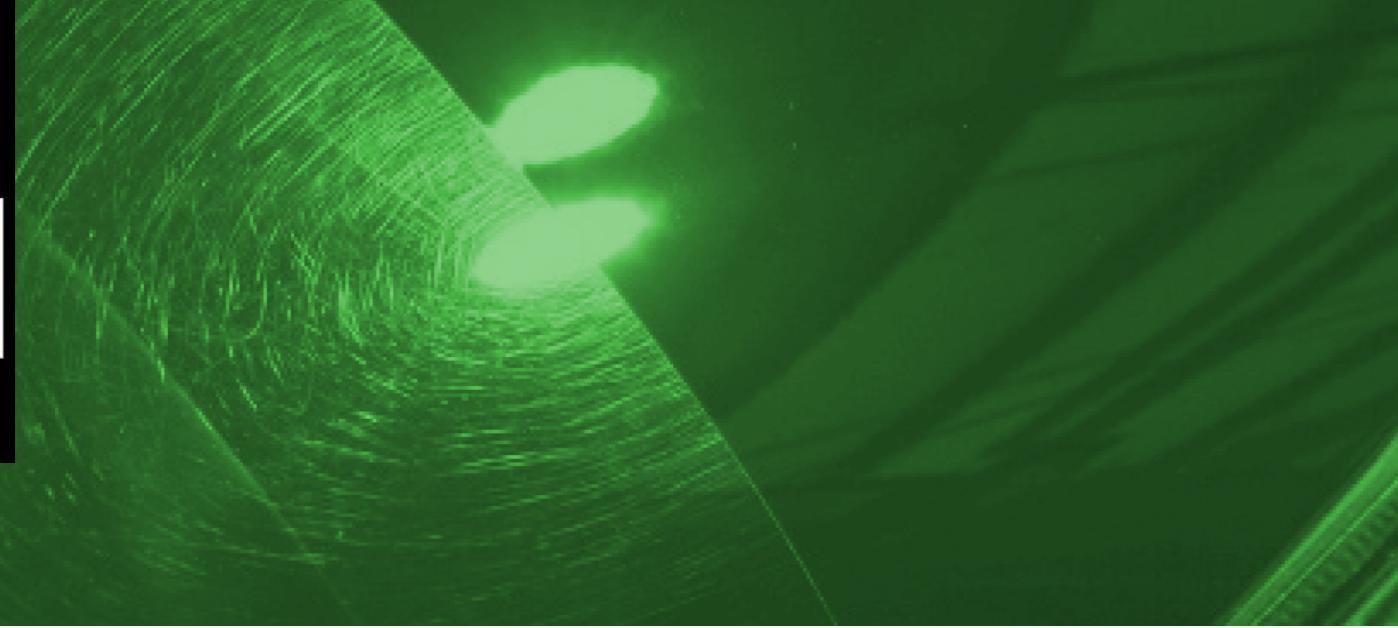

STEP

One Step Polish for scratch removal

Product ID	: STEP0250 8.5oz
Consumption	: 0.017 oz/ft ²
Used for	: Clearcoat, glass and acrylic
Application field	: Agricultural, Heavy Equipment

ONE STEP POLISH

Only this High Quality Polish Compound together with the above mentioned pads assure that every car can be polished from deep scratches till high gloss/zero swirl in one single step. This saves an enormous amount on working hours as polishing takes normally 65% of the total process to make a truck or bus a nano layer.

RECOMMENDED POLISH PADS

Purple Wool Heavy Cutting Pad cuts like natural sheepskin but finishes like a polish pad. Aggressively removes P1500 grit scratches, leaving a lustrous finish with no hazing by reducing compounding swirls.

The Cutting Pad is constructed with a blue foam and white microfiber. The Micro Cutting Pad with orange foam and white microfiber, the Polishing Pad is constructed with a black foam and black microfiber.

The pad serie is available 5.5 inch and 3 inch.



SKU-40201008-5.5INCH
SKU-40201408-3.0INCH



SKU-40201101-5.5INCH
SKU-40201501-3.0INCH



SKU-40201206-5.5INCH
SKU-40201608-3.0INCH



SKU-40201302-5.5INCH
SKU-40201702-3.0INCH



SKU-40201302-5.5INCH
SKU-40201702-3.0INCH

CLEAN

Steril Cleaner for hard surface pretreatment

Product ID	: CLEAN0500 16 oz
	CLEAN5000 1.32 gal / CLEAN020L 5 gal
Consumption	: +/- 0.01 oz/ft ²
Used for	: Clearcoat, windshields, mirrors, plastics, steel
Application field	: Agricultural, Heavy Equipment



100% Steril with nano interlock technology (active lifting encapsulate the grease from the surface)

- Surface cleaning and residue removal.
- Cleaning gloves, notebooks, phones or any other item entering the cleanroom.
- Wipe down for pass-through to controlled environments.
- Pretreatment for the application of thin film coating




Easy to apply
spray & wipe



Indoor
Outdoor




Remove grease



Easy Clean



100% Steril



Visibility
Safety

Applicator:



100% Steril





APPLY
VIDEO
SCAN
QR CODE



SNOW

Wash Foam for all exterior surfaces

Product ID	: SNOW5000 1.32 gal / SNOW020L 5 gal
Dilution Ratio	: 1:4 (Typical foam gun basket capacity: 32 oz)
Consumption	: 1.32 gal ~20 Washes - 5 gal ~ 80 Washes
Used for	: Cleaning all exterior surfaces
Application field	: Agricultural, Heavy Equipment

Snow Wash (Wash Foam) – Long-Soak Cleaning for Agricultural & Heavy Equipment

Snow Wash is a high-performance foaming cleaner with foam enhancers and stabilizers for a rich, lasting foam blanket that softens and lifts dirt, grease, and grime from heavy machinery.

Powered by Reactivating Pure Shine Technology, it includes a rinsing aid that leaves surfaces nearly dry after rinsing. To maintain the "easy-to-clean" effect of our nano protective layers, ensure surfaces are free of dyes, waxes, or polymer sealants.

Free from polymers, waxes, and colorants, it leaves no chemical film or risk of discoloration. Safe for all non-porous surfaces and food-grade compliant—ideal for farm and industrial equipment, even in hygiene-critical environments.

Biodegradable



-  **Easy to apply**
-  **Easy to clean**
-  **Stays cleaner longer**
-  **Food grade**
-  **Biodegradable**
-  **Applicator:**


MPCL

Multi Purpose Cleaner for all interior surfaces

Product ID	: MPCL0500 16 oz / MPCL5000 1.32 gal / MPCL020L 5 gal
Consumption	: 0.017 oz/ft ²
Used for	: Cleaning all interior surfaces, incl carpet
Application field	: Agricultural, Heavy Equipment

The All-Purpose Cleaner is a fast, all-surface interior cleaner, low foaming, odor free, and especially suitable for removing stubborn stains from carpets, fabrics, vinyl, plastics and leather safely.

- It is very easy to clean dirt.
- Ready-to-use mixture with the right chemical strength and safe to use
- Of course it is safe for the surface of fabrics, carpets, plastics, leather, rubber and does not fade paint.
- Quickly remove dirt, dust and food scraps

Safe to use does not harm or discolor the surface.



-  **Easy to apply spray & wipe**
-  **No discoloration**
-  **Indoor Outdoor**
-  **Quick to use**
-  **Spills are easy to remove**
-  **Cleaner for longer**



APPLY
VIDEO
SCAN
QR CODE

What is NANO-CERAMIC UVA Topcoat?

NANO-CERAMIC® UVA Topcoat is an innovative low-VOC, non-PFAS, sprayable protective coating designed especially for the demanding conditions of trucks and buses. This self-leveling system forms an ultra-hard, glass-like hydrophobic barrier that delivers superior protection and a sleek, high-gloss finish.

Engineered for extreme durability, UVA Topcoat resists harsh weather, intense UV radiation, road salts, and aggressive chemicals commonly encountered in road transport. It is fully safe and compliant for use on passenger and cargo vehicles—including food-contact areas—ensuring both safety and performance.

Powered by cutting-edge nanotechnology, UVA Topcoat extends the service life of critical surfaces such as polyester, epoxy, polyurethane, acrylic resins, steel, aluminum, composites, and wood. It effectively prevents corrosion and surface degradation, providing a reliable solution to protect agricultural and heavy equipment.

Why UVA Topcoat is a Game-Changer in Protection?

For decades, protective coatings like epoxy, polyurethane (PU), and acrylic have been the industry standard. However, they all share a critical weakness—UV degradation. Prolonged exposure to sunlight causes these coatings to yellow, crack, and deteriorate, leading to costly maintenance and premature failures.

Superior Performance at the Lowest Cost.

UVA Topcoat isn't just another coating—it's a next-generation solution designed to simplify and reduce costs in agricultural and heavy equipment maintenance. By replacing complex, multi-layer systems with a single, high-performance layer, it streamlines your coating process.

Applied directly over existing paints and materials, UVA Topcoat eliminates the need for expensive refinishing or additional topcoats, saving both time and money. Its advanced chemistry and ease of application make traditional coating systems obsolete for tractors, harvesters, loaders, excavators, trailers, and storage silos. Whether protecting heavy-duty trucks, buses, or trailers, UVA Topcoat simplifies your workflow and maximizes value—demonstrating that outstanding durability and protection don't have to come with a premium price.


Where can UVA Topcoat be used?

UVA Topcoat is highly versatile and ideal for a wide range of truck and bus applications:

- Exteriors – Body panels, bumpers, roofs, and vinyl canopies or tarps for durable protection
- Cargo Areas – Beds, storage compartments, and canopy coverings with chemical and abrasion resistance
- Interiors – Dashboards, seats, walls, and floors for easy cleaning and long-lasting finish
- Chassis and Undercarriage – Protection against corrosion, road salts, and harsh weather

Compatible with both new vehicles and retrofits, UVA Topcoat adapts to various materials and tough operating conditions common in truck and bus transport.

How it Works

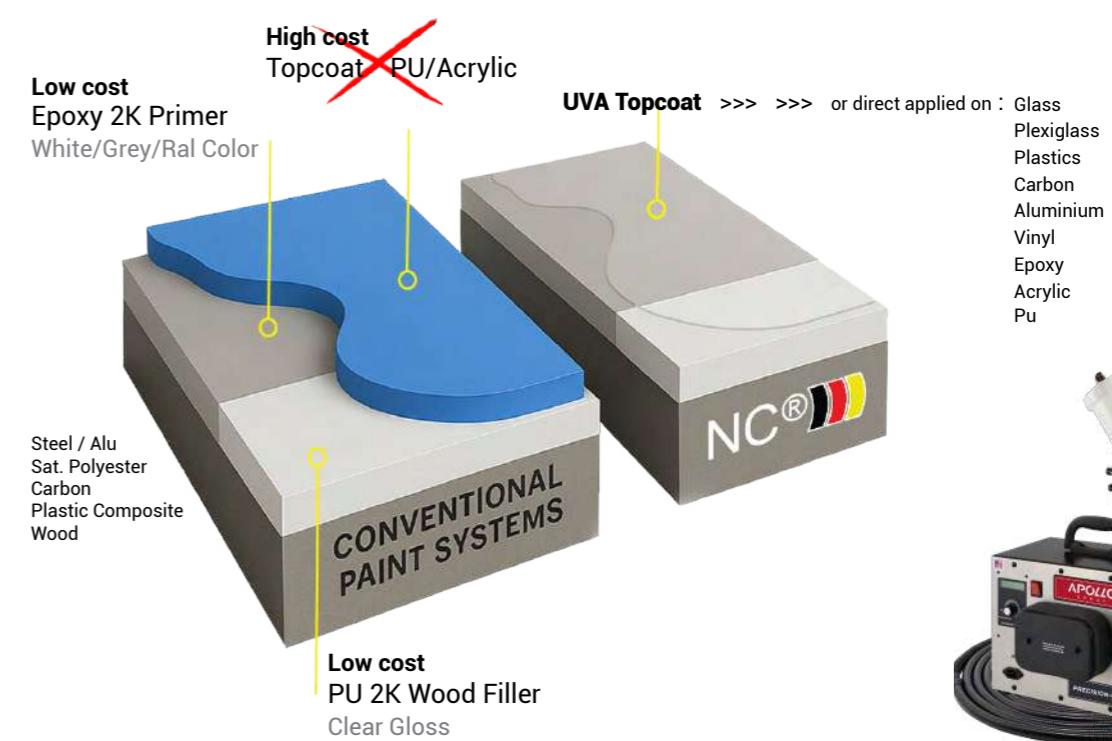

Freedom in Protection Years

Long-Lasting Protection, Layer by Layer

A single 6 μm (micron) layer applied using HVLP spray technology can provide up to 8 years of protection. Need more durability? Just add more layers—it's that simple.

Apply wet-on-wet: once the first coat flashes off (dry to the touch but still tacky), you can immediately apply the next. This method prevents trapped gases and creates a seamless, chemical-resistant film with hydrophobic properties—making surfaces easier to clean and maintain.

Coverage & Application Efficiency



UVA Topcoat is engineered for maximum efficiency with minimal material use—delivering high-performance protection at a fraction of the volume required by traditional coatings.

Recommended usage is approximately $\pm 0.025 \text{ lbs/ft}^2$ per layer (by wipe or spray), resulting in a film thickness of around 6 microns, with one liter covering up to 800 ft^2 .

Color Tinting Option

For customized aesthetics, UVA Topcoat can be tinted using our colorants (see pages 22–23). These high-performance, solvent-free pigments provide long-lasting color stability and outstanding UV resistance—ideal for tractors, harvesters, excavators, loaders, trailers, and storage silos where both durability and appearance matter.


Perfect for any visible surface that needs a tough, colored finish without compromising UVA Topcoat's hydrophobic, chemical-resistant, and protective properties.

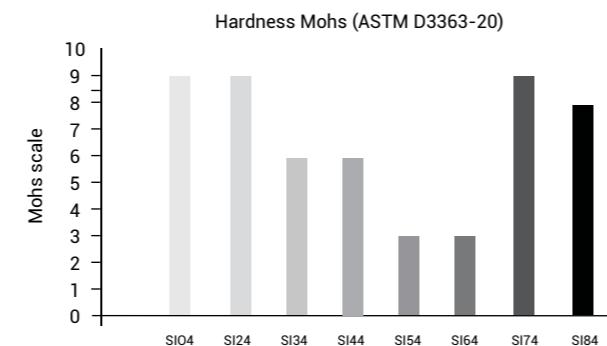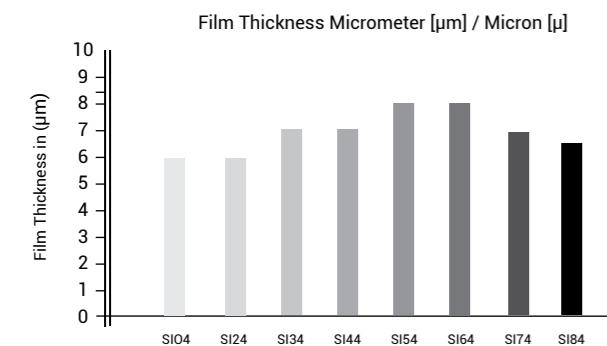

Quality Comparison of paints technologies

In case written in bold font it means existing shortcomings in quality.

Characteristics	Acrylic Latex walls ceilings	Acrylic walls floors	Epoxy floors	Polyurethane waterproofing	UVA Topc all surfaces
Primer	Yes	Yes	Yes	Yes	No
Adhesion Strength	Poor	Poor	Poor	Poor	Excellent
Cross Cut Test	Poor	Poor	Good	Poor	Excellent
Abrasion Resistance	Poor	Poor	Average	Poor	Excellent
UV Radiation Resistance	Average	Average	Poor	Good	Excellent
Artificial Atmospheric Agents	Poor	Poor	Good	Good	Excellent
Colour Retention	Average	Average	Poor	Poor	Excellent
Gloss Retention	Poor	Poor	Poor	Poor	Excellent
Chemical Resistance	Good	Good	Good	Poor	Excellent
Severe Chemical Attack	Poor	Poor	Average	Poor	Excellent
Temperature Resistance	140°F	196°F	350°F	505°F	550°F
Thermal Shock Resistance	Good	Good	Poor	Good	Excellent
Carbon Dioxide Permeability	Poor	Poor	Good	Poor	Excellent
Permeability water vapour	Average	Average	Good	Average	Excellent
Water Absorption Rate	5-15%	1%	2%	3%	0%
Aging at 70°C	Poor	Poor	Good	Average	Excellent
Adhesion Strength Pull-off	Poor	Average	Good	Poor	Excellent
Impact Resistance	Poor	Average	Good	Poor	Excellent
Anti-Graffiti	No	No	No	No	Yes
Anti-Termite (Wood)	No	No	No	No	Yes
Hydrophobic Self Cleaning	No	No	No	No	Yes
Easy to Clean	No	No	No	No	Yes
Total Solar Reflectance (TSR)	60 (white)	60 (white)	60 (white)	60 (white)	88 (white)
Expected Lifetime in Years	<7	<7	<5-15	<5-15	8/16/24

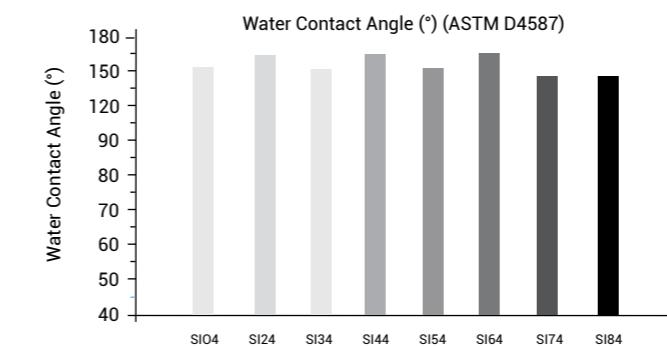



APPLY
VIDEO
SCAN
QR CODE



SI04

1-Component (2K)

Topcoat Transparent for glossy surfaces

Product ID : SI041LUVA 32 oz / 2.03 lbs SI0405UVA 16 oz / 1 lbs
Consumption : 3 layers +/- 0.075 lbs/ft² - 0.12 oz/ft² 18 micron = 200 ft²
Reachable area : 2 layers +/- 0.050 lbs/ft² - 0.08 oz/ft² 12 micron = 400 ft²
: 1 layer +/- 0.025 lbs/ft² - 0.04 oz/ft² 6 micron = 800ft²

Hardness/Cupping : H9 / Flexibility ISO 1520 >0.8"

Used for : Painted surfaces, steel, chrome, plastics

Application field : Agricultural, Heavy Equipment

SI04 is an incredibly strong 1-component paint system which forms a durable matrix of molecular bonds (transformation to ceramic) resulting in permanent protection of the surface.

Three simple steps: Clean, Dry, and Apply.

- Easily repels water, dirt, dust, and pollutants.
- This coating is permanent hydrophobic.
- Restores damaged finishes and reduces cleaning intervals.
- Resistant to all kinds of chemicals and UV radiation.
- Superior anti-pollution and anti-corrosion properties.
- This coating can withstand temperatures of 550°F.

Expected life duration 4-16 or 24 Years (layer thickness)



How to use: Page 32



Easy to apply
Repaintable



Cut maintenance
costs



Anti-water spot
Anti-corrosion



Permanent
hydrophobic



Self-cleaning
Cleaner for longer



Anti-scratch



Impact Resistance
30"-2lbs



Protects your
investment



SI24

1-Component (1K)

Topcoat Transparent for matte surfaces

Product ID : SI241LUVA 32oz / 2.13 lbs SI2405UVA 16oz / 1.05 lbs
Consumption : 3 layers +/- 0.075 lbs/ft² - 0.12 oz/ft² 18 micron = 200 ft²
Reachable area : 2 layers +/- 0.050 lbs/ft² - 0.08 oz/ft² 12 micron = 400 ft²
: 1 layer +/- 0.025 lbs/ft² - 0.04 oz/ft² 6 micron = 800ft²

Hardness/Cupping : H9 / Flexibility ISO 1520 >0.8"

Used for : Painted surfaces, steel, chrome, plastics

Application field : Agricultural, Heavy Equipment

SI04 is an incredibly strong 1-component paint system which forms a durable matrix of molecular bonds (transformation to ceramic) resulting in permanent protection of the surface.

Three simple steps: Clean, Dry, and Apply.

- Easily repels water, dirt, dust, and pollutants.
- This coating is permanent hydrophobic.
- Restores damaged finishes and reduces cleaning intervals.
- Resistant to all kinds of chemicals and UV radiation.
- Superior anti-pollution and anti-corrosion properties.
- This coating can withstand temperatures of 550°C

Expected life duration 4-16 or 24 Years (layer thickness)



How to use: Page 32



Easy to apply
Repaintable



Cut maintenance
costs



Anti-water spot
Anti-corrosion



Permanent
hydrophobic



Self-cleaning
cleaner for longer



Anti-scratch



Impact Resistance
30"-2lbs



Protects your
investment



TEST
REPORT
SCAN QR
CODE

UVA Topcoat Colorants

Precision Color Control – From Super-Transparent

Tints to Bold, Defined Shades

As a coating manufacturer, we use advanced colorant chip technology to produce fully prepared, ready-to-use colorants that integrate seamlessly into our coating systems.

The colorant chips themselves are selected, processed, and blended by us under controlled conditions, resulting in liquid colorants with precise concentration, high transparency, and excellent stability. Our customers receive a finished colorant product and do not need to handle or process chips in any way.

Because the colorants are supplied ready to use, incorporation into our coating systems is simple and straightforward. The required amount of colorant can be added directly to the coating and mixed using standard stirring or mechanical mixing.

The colorant disperses quickly and evenly, without streaking, cloudiness, or the need for special equipment. This makes color adjustment easy and reliable, even for small batches or on-site applications.

By controlling the entire process—from coating and colorant chip selection to finished colorant production—we ensure consistent color accuracy and repeatability from batch to batch.

The colorants are specifically engineered to remain fully compatible with our high-performance binder technologies. As a result, color can be introduced without compromising transparency, gloss, durability, or chemical resistance.

The outcome is a coating system in which professional color control—from super-transparent shades to bold finishes—is achieved with minimal effort for the user: add the colorant, mix, and apply.



WHITE UVAWH0100
 Masstone to Transparent Tint
 SI080 **0.32 oz**



BLACK UVABK0100
 Masstone to Transparent Tint
 S9938 **0.32 oz**



YELLOW UVAYE0100
 Masstone to Transparent Tint
 S2184 **0.32 oz**



RED UVARD0100
 Masstone to Transparent Tint
 S4254CN **0.32 oz**



BLEU UVABL0100
 Masstone to Transparent Tint
 S5007 **0.32 oz**



GREEN UVABL0100
 Masstone to Transparent Tint
 S7154N **0.32 oz**



What is NANO-CERAMIC Permanent Coating?

NANO-CERAMIC permanent coating is the latest generation of protective coating which transforms paint into a hard ceramic, providing superior scratch resistance and permanent protection for all exterior or interior surfaces. (PFAS-free)

NANO-CERAMIC permanent coating is 600°F resistant and more than 6 times stronger than traditional acrylic based paint finishes, and is effectively preventing damage that would otherwise affect the appearance and integrity of the original surface.

Zero Maintenance for 3 decades to come!

Our NANO-CERAMIC permanent coating (PFAS Free) is rigorously tested by an independent testing laboratory according to the European standard for outdoor paints (EN 1504-2) please find the test report on our website.

Can NANO-CERAMIC Permanent Coating be applied on any surface?


The NANO-CERAMIC permanent coating can be applied directly or indirectly on all kinds of interior and /or exterior surfaces (absorbing and non-absorbing), such as concrete, steel, wood, acrylic, glass, gypsum and many more.



Is NANO-CERAMIC Permanent Coating self-cleaning?

NANO-CERAMIC permanent coating provides a permanent hydrophobic surface that is self cleaning, easier to clean and stays cleaner longer as water and dirt can not penetrate the ceramic layer. NANO-CERAMIC permanent coating is resistant to water vapor and water absorption.

Cross Sections of NC® Coating Systems

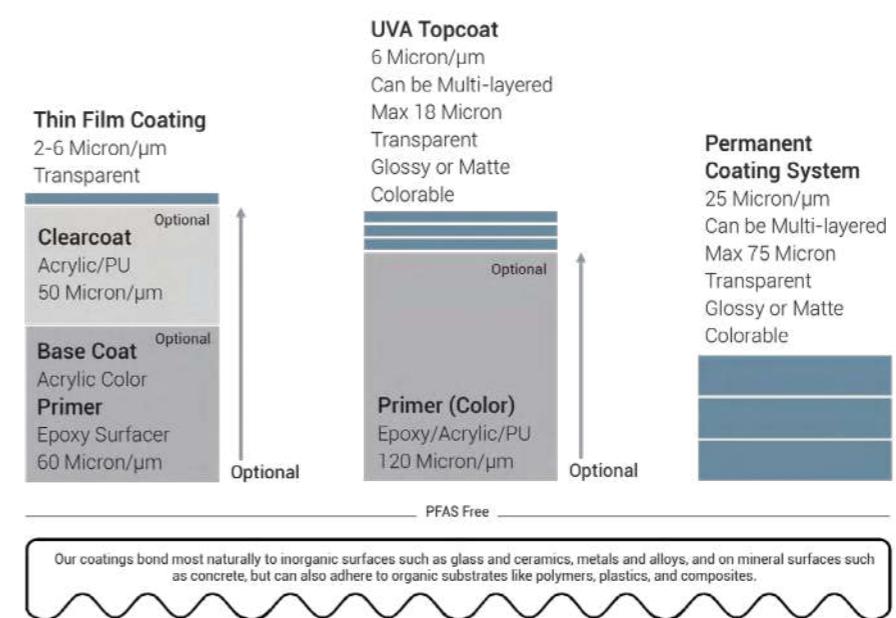

Conventional paints

The lifespan of conventional paints and coatings depends primarily on their placement and environment. These coatings—made from resins like epoxy, acrylic, PU, or polyester combined with pigments—rely on both component quality and chemical resistance to determine durability. Although their lifespan can reach up to 15 years, it often falls short due to hardness degradation, UV-induced color fading, and chemical attack. Exposure to harsh agents (e.g. solvents, acids, bases, salts) can cause swelling, gloss loss, adhesion failure, blistering, or surface breakdown. Additionally, when the paint film softens or becomes water-sensitive—often due to additives—it can absorb dirt rather than just accumulate it, leading to a dull, matte, or cloudy appearance that cannot be cleaned off and may require stripping the surface to restore clarity.

There is no better option than protecting your fleet with a NANO-CERAMIC Thin Film or Permanent Coating!

Do not wait till the surface get worse, most easy is to apply wipe or spray when the surfaces are still in new or in nearly new condition and the cost do not outweigh the benefits

Color mixing has never been so easy!!!

X- SMART is the modular version of the acclaimed dispenser series, extremely cost-effective and easy to operate, with a low maintenance

This color mixer has a robust and tubeless design, built with a patented pump technology (to reduce waste) and identical features, making it a highly advanced dispenser, ideally suited to reduced capacity.



X-SMART
Stabilizer plates

16 High Grade Coloring chemicals



Titanium White
Masstone Tint 844-0061 1.05 gal



Quinacridone Red
Masstone Tint 844-0451 32 oz



Scarlet Red
Masstone Tint 844-0526 32 oz



Lead Free Orange
Masstone Tint 844-0982 32 oz



Trans Red Oxide
Masstone Tint 844-1054 32 oz



Red Oxide
Masstone Tint 844-1063 32 oz



Burnt Umber
Masstone Tint 844-1352 32 oz



Trans Yellow Oxide
Masstone Tint 844-1852 32 oz



Yellow Oxide
Masstone Tint 844-1863 32 oz



Lead Free Med Yellow
Masstone Tint 844-2555 32 oz



Yellow
Masstone Tint 844-2826 32 oz



Organic Yellow
Masstone Tint 844-2852 32 oz



PHTHALO Green
Masstone Tint 844-5558 32 oz



Quinacridone Violet
Masstone Tint 844-9451 32 oz



Lamp Black
Masstone Tint 844-9955 32 oz



PHTHALO BLUE
Masstone Tint 844-7262 32 oz

Color card

Residential		
SI13 White Egg-Shell (Flat Finish) 15/25 (20/60°)	SI41 Textured White Semi Gloss 41/69 (20/60°)	
SI15 White Egg Shell (Flat Finish) 18/28 (20/60°)	SI42 Textured White Matte 11/21 (20/60°)	
SI21 White Gloss 49/77 (20/60°)		
SI22 White Satin 33/59 (20/60°)		
Original	RAL 9018	RAL 3015
Cool white	Papyrus white	Light pink
RAL 9001	RAL 9022	RAL 9007
Cream white	Pearl light grey	Pastel blue
RAL 9002	RAL 9023	RAL 4009
Grey white	Pearl dark grey	Pastel violet
RAL 9003	RAL 1000	RAL 6027
Signal white	Green beige	Light green
RAL 9004	RAL 1001	RAL 7000
Signal black	Beige	Squirrel grey
RAL 9005	RAL 1002	RAL 1036
Jet black	Sand yellow	Pearl gold
RAL 9006	RAL 1011	RAL 8029
White aluminium	Brownbeige	Pearl copper
RAL 9007	RAL 1013	RAL 4012
Grey aluminium	Pearl white	Pearl blackberry
RAL 9010	RAL 1014	RAL 5025
Pure white	Ivory	Pearl gentian blue
RAL 9011	RAL 1015	RAL 6036
Graphite black	Light ivory	Pearl opal green
RAL 9016	RAL 9017	Mahogany braun

Wood		
SI11 Transparent Gloss 51/78 (20/60°)	SI11 Transparent	
SI12 Transparent Matte 11/21 (20/60°)		
SI22 White Satin 33/59 (20/60°)		
Original	SI11 Transparent	
Cool white	SI11 Light	
RAL 9001	SI11 Nut	
Cream white	SI11 Colonial	
Grey white		
Signal white		
Signal black		
Jet black		
White aluminium		
Grey aluminium		
Pure white		
Graphite black		
Traffic white		

Industrial		
SI11 Transparent Gloss 51/78 (20/60°)	Original	
SI21 White Gloss 49/77 (20/60°)	Cool white	
SI22 White Satin 33/59 (20/60°)	Fire red	
Original	Transparent	
Cool white	Luminous yellow	
Fire red	Traffic red	
Transparent	Jet black	
Luminous yellow	Golden yellow [Cat]	
Traffic red	Leaf green [J.D Deere]	
Jet black	Light grey	
Golden yellow [Cat]	Dark grey	
Leaf green [J.D Deere]	Silver grey	
Light grey	Dark grey	
Dark grey	Silver grey	
Silver grey	Signal brown	
Signal brown	Pale brown	

Marine		
SI12 Transparent Matte 11/21 (20/60°)	SI31 Textured Transparent Semi Gloss 41/69 (20/60°)	
SI11 Textured White Semi Gloss 41/69 (20/60°)	SI33 Textured Black Semi Gloss 41/69 (20/60°)	
SI42 Textured White Matte 11/21 (20/60°)	Original	
Original	Cool white	
Cool white	Pure white	
Pure white	Cream white	
Cream white	Platinum	
Platinum	Jet black	
Jet black	NATO green	
NATO green	Graphite grey	
Graphite grey	[RAF] Blue grey	
[RAF] Blue grey	Dark sea grey	
Dark sea grey	RAL 7004	
RAL 7004	Signal Grey	
Signal Grey	Original	
Original	Fire red	
Fire red	Transparent matte	
Transparent matte	Light stone	
Light stone	Transparent	
Transparent	Jet Black	
Jet Black	Signal Red	
Signal Red	Ultra marine blue	
Ultra marine blue	Original	
Original	Prisma-RT	
Prisma-RT	Prisma-RT	

SIX1

2-Component (2K)

Primer Epoxy Polyamide

heavy duty - anti-corrosion



Product ID : SIX11250-WH/GR 42 oz / 3.2 lbs SIX15000-WH/GR 1.32 gal / 12.8 lbs

Consumption : 2 layers +/- 0.53 lbs/ft² - 0.7 oz/ft² 80 micron = 50 ft²

Reachable area : 1 layer +/- 0.26 lbs/ft² - 0.40 oz/ft² 40 micron = 100 ft²

Hardness : H5

Colors : White, Grey or RAL (RAL Minimum Order 250 pcs 1.32 gal)

Used on : Concrete, Steel, Aluminium, Fiberglass and other organic surfaces

Application area : Buildings, marine, airports, offshore structures, bridges

-  **Fast Repaintable**
-  **Excellent adhesion**

SIX1 is a solvent based epoxy polyamide primer. This primer is used for corrosion protection on concrete, stainless, galvanized, carbon and alloy steel, aluminum in corrosive conditions and has excellent adhesion to all organic substrates and to all of our ceramic topcoats. The primer can be applied at a relative humidity of 40-80% and can be painted over within 8 hours 85°F, 1 hours 140°F.



SIX2

2-Component (2K)

Primer Surfacer Acrylic Alkyd

smooth - surface modifier



Product ID : SIX21250-WH/GR 42 oz / 3.2 lbs SIX25000-WH/GR 1.32 gal / 12.8 lbs

Consumption : 2 layers +/- 0.44 lbs/ft² - 0.7 oz/ft² 60 micron = 60 ft²

Reachable area : 1 layer +/- 0.22 lbs/ft² - 0.4 oz/ft² 30 micron = 120 ft²

Hardness : H3


Colors : White or Grey

Used on : Steel, aluminium, wood, fiberglass, and old paint systems.

Application area : Buildings, marine, airports, bridges

-  **Fast Repaintable**
-  **Excellent adhesion**
-  **VOC Free**

SIX2 High-quality 2K surfacer (two-component basecoat) for auto-refinish, marine, and industrial coating applications where a smooth surface is required. The primer has excellent adhesion to all organic substrates and to all of our ceramic topcoats. The primer can be applied at a relative humidity of 30-80% and can be painted over within 4 hours 85°F, 1 hours 140°F.

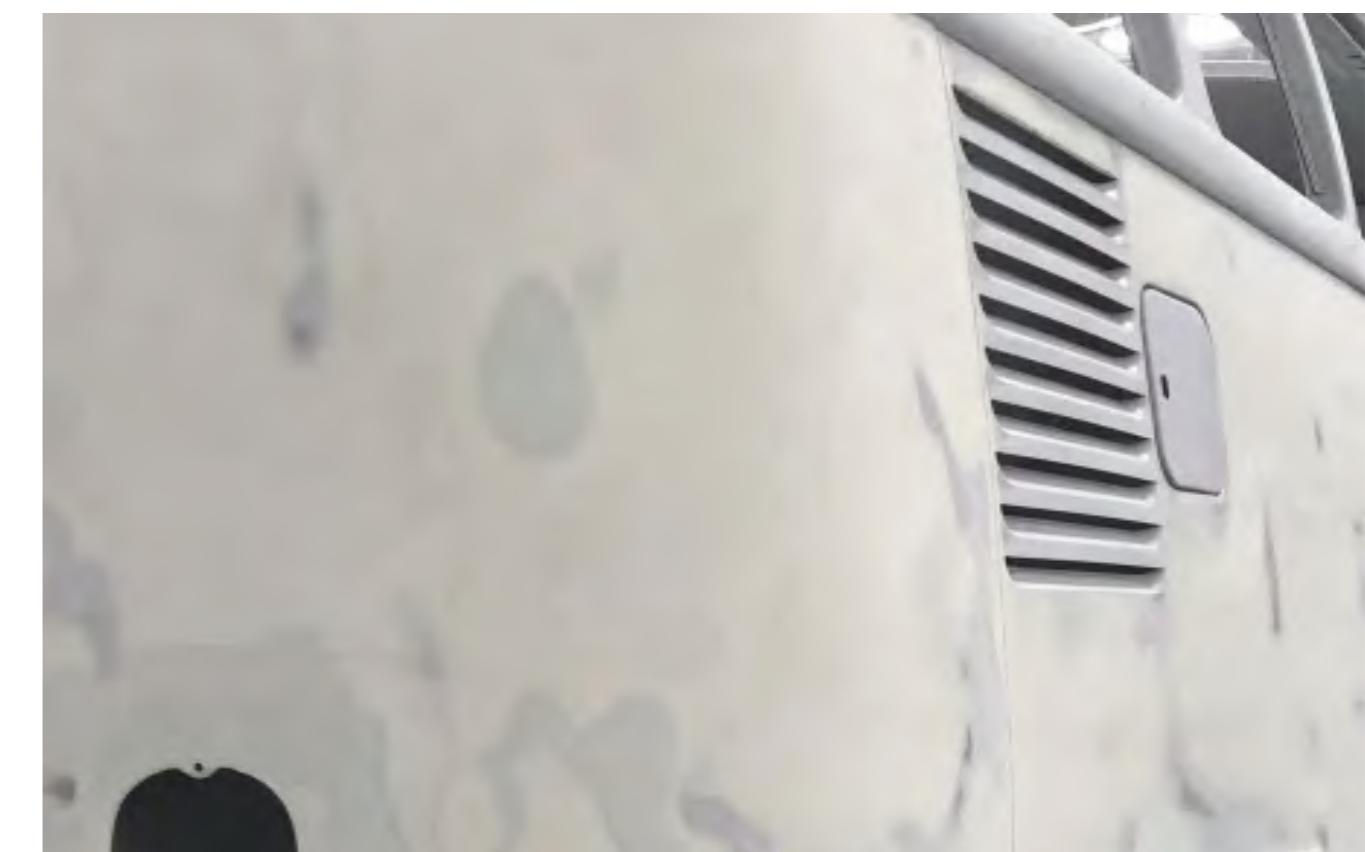

SIX3

2-Component (2K)

Primer PU Wood Filler

surface modifier - absorbtion reducer

Product ID : SIX31500 51 oz / 3.3 lbs
Consumption : 2 layers +/- 0.40 lbs/ft² - 0.6 oz/ft² 60 micron = 80 ft²
Reachable area : 1 layer +/- 0.20 lbs/ft² - 0.3 oz/ft² 30 micron = 120 ft²
Hardness : H4
Used on : Steel, Aluminium and other organic surfaces
Application area : Buildings, marine, airports, bridges, automotive

SIX3 is a solvent borne transparent wood filler. This primer is used as surface modification for, wood or natural stone to reduce capillary absorption and has an excellent adhesion to all organic substrates and towards one of our ceramic top coats. The primer can be applied at a relative humidity of 40-80%.



-  **Fast Repaintable**
-  **Excellent adhesion**



Wood Filler - All Surface modifier

SIX5

2-Component (2K)

Putty Polyester

ultra smooth - sandable

Product ID : SIX51000-WH/GR 2.2 lbs
Colors : White, Grey
Used on : Metal, wood, fiberglass, concrete, plastics
Application area : Buildings, marine, airports, bridges, automotive

SIX5 is a High quality 2 (two) component Epoxy base putty for auto-refinish, marine and industrial coating applications.



-  **Fast Repaintable**
-  **Excellent adhesion**

RETA/ACCL

Retarder / Accelerator

slow down flash time or speed up curing

Product ID : RETA0400 14 oz / 0.85 lbs ACCL0200 7 oz / 0.4 lbs

If your application needs a longer flash time (for example, in hot temperatures) to build up the layer with a second or third coat, you can add the RETA Retarder. If you want to speed up the curing process, you can add the ACCL Accelerator. It can reduce curing time by 30–70% compared to uncatalyzed systems, and full hardness can develop 1.5–2x faster.



SOLV

Thinner solvent

for all types of our ceramic paint & coating

Article Nr. :: SOLV0400 14 oz / 0.8 lbs SOLV2000 64 oz / 3.9 lbs



All our paints and coatings are ready to use, for certain spray applications, especially dark colors who require more than average color pigments, it may be necessary to use a little thinner solvent to achieve optimum flowability.

Where to use



Mask



Nitrile gloves

NANO-CERAMIC®

THE NEW GENERATION COATINGS

NANO-CERAMIC.COM

How to use our Thin Film Coatings SI03/SI05+SI02:

These products can be stored for up to 24 months (in a dry, temperature-stable dark environment)

Instructions for use:

Surface Preparation

- Wash all surfaces thoroughly with our Pure Shine Shampoo. if heavily soiled, pre-clean using Scrub Cleaner
- Dry completely.
- Polish if needed using or One Step Polish (works best on new or like-new surfaces).
- Use nitrile gloves, apply Steril Pretreatment Cleaner with clean towels—use multiple clean cloths to remove greasy avoid smearing dirt around.
- Ensure the surface is spotless; contamination can cause visible defects in the cured coating.

Application (SI03–SI05 Top Coat)

- Watch the application video via the QR code for technique guidance.
- Glove up! Remove the closure, insert the dropper, and shake well.
- Work in manageable sections following panel shapes and edges for overlap control.
- Use the applicator block with a suede mini-towel on top and apply 6–8 drops per 15 x 15" inches, adjusting if towel feel too dry.
- Start from the center of the section (otherwise it's hard to spread from corner to corner)
- Spread with light pressure in criss-cross strokes until product is evenly applied.
- Keep going until no residue remains.
- Avoid over-applying—uneven layers and rolling-ups often result from too much product. (most common failure)
- If applied correctly, almost no polishing with a microfiber towel is needed afterward. (but you still polish with a clean microfiber towel to make sure that haze / residue is removed)

Application (SI02 Safety Vision Window Coating)

- Thoroughly clean both the inside and outside of the windshield, including wiper blades and seals, using Steril Pretreatment Cleaner
- Watch the application video via the QR code for technique guidance.
- Dispense 10–15 drops of coating onto a cotton pad, then rub it in evenly across the glass using firm pressure on the pad.
- Continue until a light gray haze becomes visible over the surface. (Wait approximately 2 minutes (at 68°F) for solvents to evaporate)
- Gently buff away the haze with a clean microfiber cloth.

Curing:

Tough Dry 5min, Hard Dry 2 Hours, 85% Cured 12 Hours, 100% Cured 5 Days

How to use our UVA Coating System:

These products can be stored for up to 24 months (*in a dry, temperature-stable dark environment*)

Processing Temperature:

Ambient temperature: 41-86°F
Avoid direct sunlight, Rain and /or high humidity.

IMPORTANT:

Before you use a NANO-CERAMIC product, please make sure you wear suitable protection gear. We always recommend using a paint suit, respirator mask and latex or nitrile gloves.

Outfit/Applicators:



Fresh Air Respirator



Paint Suit



Nitrile gloves

Application information

Protect or Renew; Marble, Granite, Varnished wood, HPL, PVC or Vinyl laminate and Melamine. Creates an easy-to-clean, anti-scratch surface that is resistant to UV Discoloration, HF (Hydrofluoric Acid), Hydro-chloric Acid, and Citric Acid.

Wipe Application; 1. Clean the surface 2. Sterilize the surface 3. Apply via the cotton pad an even layer 4. Let it cure.

Spray Application; Use an HVLP (High Volume Low Pressure) spray gun with 60-80% transfer efficiency. Fit the spray gun with a 1.0-1.3 mm fluid tip. Set air pressure to 20-30 psi.

Preparation Steps:

1. Stir the coating thoroughly for 30 seconds before use.
2. Prior to application, strain the mixed coating through a suitable paint filter (e.g., 190-250 µm) to ensure a clean, defect-free spray.
3. Wash and decontaminate the surface.
4. Wet sand / scuff using 1500-2000 grit sandpaper.
5. Mask off any parts not to be coated.
6. Ensure environmental conditions are below 65% humidity.
7. Perform a final clean using 100% acetone.
8. Wipe with a tack cloth to remove any dust or lint.

Application Procedure:

1. Spray a light, even coat. Allow a 5-minute flash-off time, or until outgassing stops.
2. Apply a second coat. Allow to flash off for at least 15 minutes, or until outgassing stops.
3. Unmask carefully before the coating fully cures.

Curing:

Tough Dry 5min, Hard Dry 2 Hours, 85% Cured 12 Hours, 100% Cured 5 Days. Refer to the TDS/SDS for more information.



How to use our Permanent Coating System:

These products can be stored for up to 24 months (*in a dry, temperature-stable dark environment*)

Processing Temperature:

Ambient temperature: 41-86°F
Avoid direct sunlight, Rain and /or high humidity.

IMPORTANT:

Before you use a NANO-CERAMIC product, please make sure you wear suitable protection gear. We always recommend using a paint suit, respirator mask and latex or nitrile gloves.

Outfit/Applicators:



Fresh Air Respirator



Paint Suit



Nitrile gloves

Application information

The SI11/SI12/SI21/SI22/SI31/SI33 coatings can be applied directly or indirectly on all surfaces (porous and non-porous) such as concrete, steel, wood, acrylic, gypsum, painted or unpainted surfaces, indoors, or outdoors. The surface underneath will be superbly protected against erosion and corrosion and will stay cleaner longer. Cleaning becomes quicker, easier, and less expensive, as special cleaning agents are unnecessary.

Preparation

Make sure the surface is free from any contamination and dirt. A zinc rich primer can be used in case of problems with the substrate. **Warning the surface must be completely dry before application and must stay dry for 6 hours after application!**

The 2-Component Permanent Coating System

Mix the can SI11B-SI12B-SI21B-SI22B-SI31B-SI33B with the can of SI11A-SI12A-SI21A-SI22A-SI31A-SI33A by pouring can B into can A, or measure exactly by net weight in a ratio of 7:3 and mix very well, or measure exactly by net weight in a ratio of 9:1 and mix thoroughly with a power agitator.

The 2-Component Permanent Coating System

Mix the can SI11B-SI21B-SI32B-SI33B with the can of SI11A-SI21A-SI32A-SI33A by pouring can B into can A, or measure exactly by net weight in a ratio of 9:1 and mix very well. Mix the can of SI21B with the can of SI21A by pouring can B into can A, or measure exactly by net weight in a ratio of 9:1 and mix thoroughly with a power agitator. Carefully pour the mixed contents into a professional paint sprayer, and spray in thin layers until the surface reaches your desired thickness. Let the surface dry for 24 hours. It is touch-dry in 1 hours, after 4 hours, 85% cured, and the remaining 15% (transformation into ceramics) is fully cured after



