

NANO-CERAMIC®

WWW.NANO-CERAMIC.COM THE NEXT GENERATION COATINGS



12 YEARS
WARRANTY

Buildings Permanent Coating System

What makes NANO-CERAMIC® Permanent Coating System so durable?

The NANO-CERAMIC Permanent Coating System is the latest generation of protective coatings, transforming paint into a hard ceramic layer that provides superior scratch resistance and near-permanent protection for both exterior and interior surfaces.


The NANO-CERAMIC Permanent Coating System is resistant to temperatures up to 300°C (PFAS-free) and is more than four times stronger than traditional acrylic-based paint finishes. It effectively prevents damage that would otherwise compromise the appearance

Zero maintenance for decades to come.

Our NANO-CERAMIC® Permanent Coating System has been rigorously tested by an independent laboratory in accordance with the European standard for outdoor coatings (EN 1504-2), as detailed in our separate test report.

Can the NANO-CERAMIC Permanent Coating System be applied to any surface?

The NANO-CERAMIC Permanent Coating System can be applied directly or indirectly to a wide range of interior and/or exterior surfaces (both absorbent and non-absorbent), including concrete, steel, wood, acrylic, gypsum, and many more.

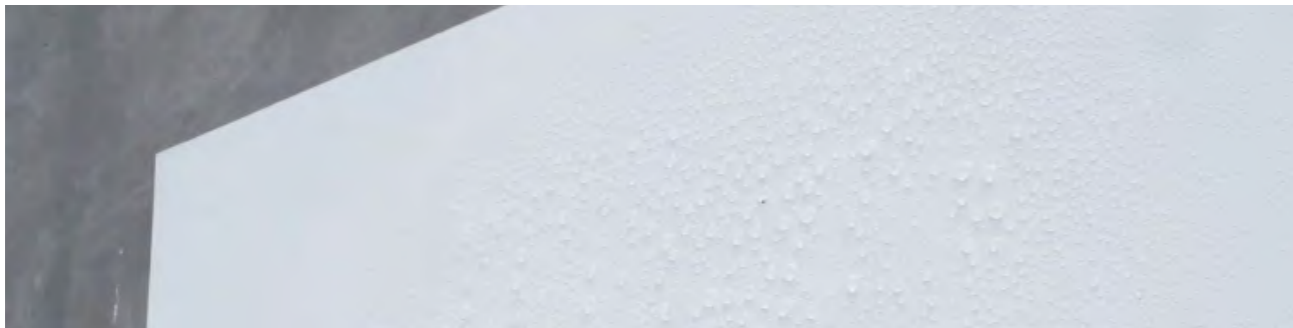

Is the NANO-CERAMIC Permanent Coating System self-cleaning?

The NANO-CERAMIC Permanent Coating System provides a hydrophobic surface that is self-cleaning, easier to clean, and stays cleaner longer, as water and dirt cannot penetrate the ceramic layer. The system is also resistant to water vapor and water absorption.

Hotter cities from climate change—can NANO-CERAMIC cool your home?

NANO-CERAMIC Revolutionary Coolest White Paint reflects up to 80% of the sun's rays—stopping heat before it even enters your building.

Engineered with advanced nanotechnology, it delivers passive cooling of up to $\pm 6^{\circ}\text{C}$, protecting surfaces from extreme temperatures while creating a noticeably cooler indoor environment.

This high-performance reflective coating reduces heat buildup on roofs and walls, minimizing thermal stress, preventing surface degradation, and extending the lifespan of construction materials.


By lowering indoor temperatures, it significantly reduces reliance on air conditioning—cutting electricity costs, improving energy efficiency, and reducing greenhouse gas emissions.

Other paints are simply not suitable for long-term harsh outdoor environments.

To avoid long-term property deterioration—like concrete rot, cracking, peeling, and fading from short-life conventional paints that require frequent repainting—our Permanent Coating System offers a superior, long-term solution.

The result: fewer repairs, lower lifetime costs, and lasting protection that preserves your property's value for decades.

Superior in Color & Gloss Retention

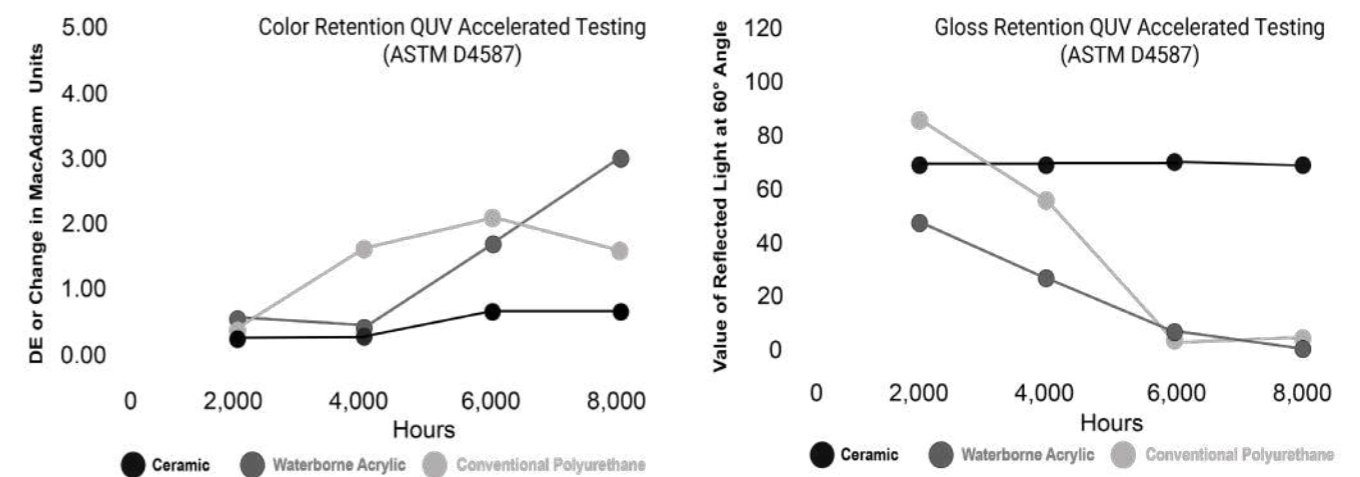

A special selection of high-grade tinting chemicals, computer-dispersed in a superior ceramic resin.

Conventional gelcoats are typically based on epoxy or polyurethane resins, where the quality of the resin and pigments plays a critical role in the final performance.

Most have a lifespan of around 15 years, with issues such as reduced hardness, color and gloss retention (UV fading), and inconsistent quality due to manual mixing being common challenges in maintaining an aesthetically pleasing finish.

Quality Comparison of paints technologies

In case written in bold font it means existing shortcomings in quality.

Characteristics	Acrylic Latex walls ceilings	Acrylic walls floors	Epoxy floors	Polyurethane waterproofing	CERAMIC® all surfaces
Primer	Yes	Yes	Yes	Yes	No
Adhesion Strength	Poor	Poor	Poor	Poor	Excellent
Cross Cut Test	Poor	Poor	Good	Poor	Excellent
Abrasion Resistance	Poor	Poor	Average	Poor	Excellent
UV Radiation Resistance	Average	Average	Poor	Good	Excellent
Artificial Atmospheric Agents	Poor	Poor	Good	Good	Excellent
Colour Retention	Average	Average	Poor	Poor	Excellent
Gloss Retention	Poor	Poor	Poor	Poor	Excellent
Chemical Resistance	Good	Good	Good	Poor	Excellent
Severe Chemical Attack	Poor	Poor	Average	Poor	Excellent
Temperature Resistance	60°C	91°C	177°C	263°C	300°C
Thermal Shock Resistance	Good	Good	Poor	Good	Excellent
Carbon Dioxide Permeability	Poor	Poor	Good	Poor	Excellent
Water Vapour Permeability	Average	Average	Good	Average	Excellent
Water Absorption Rate	5-15%	1%	2%	3%	0%
Aging at 70°C	Poor	Poor	Good	Average	Excellent
Adhesion Strength (Pull-off)	Poor	Average	Good	Poor	Excellent
Impact Resistance	Poor	Average	Good	Poor	Excellent
Anti-Graffiti	No	No	No	No	Yes
Anti-Termite (Wood)	No	No	No	No	Yes
Hydrophobic Self Cleaning	No	No	No	No	Yes
Easy to Clean	No	No	No	No	Yes
Total Solar Reflectance (TSR)	60 (white)	60 (white)	60 (white)	60 (white)	88 (white)
Expected Lifetime in Years	<7	<7	<5-15	<5-15	15-30+

10 High Tech Coatings and Paints for All Paint Jobs



Topcoat Transparent Gloss
for glossy surfaces
SI112000 (2K) 30+ Years
2 L / 1.900 g Page 8



Topcoat Transparent Matte
for matte surfaces
SI122000 (2K) 30+ Years
2 L / 2.000 g Page 10



Topcoat Textured Transparent
for semi gloss surfaces
SI312000 (2K) 30+ Years
2 L / 2.000 g Page 12



Paint Coolest White
for egg-shell surfaces
SI132000 (2K) 25+ Years
2 L / 3.300 g Page 18



Paint Coolest White
for egg-shell surfaces
SI152000 (1K) 20+ Years
2 L / 3.000 g Page 20



Topcoat Transparent Textured
for flat matte surfaces
SI352000 (1K) 20+ Years
2 L / 2.000 g Page 22



Paint Strongest White
for glossy surfaces
SI212000 (2K) 30+ Years
2 L / 2.400 g Page 14



Paint Strongest White
for satin surfaces
SI222000 (2K) 30+ Years
2 L / 2.500 g Page 16



Paint Textured White
for semi glossy surfaces
SI412000 (2K) 30+ Years
2 L / 2.400 g Page 24



Paint Textured White
for matte surfaces
SI422000 (2K) 30+ Years
2 L / 2.500 g Page 26



The Smartest Antifouling
Transparent colorable
SI144000 (3K) ~8 Years (repaintable)
4 L / 4.300 g Marine Brochure Page 09

Application examples



SI11/SI12



SI21/SI22



SI31/SI35



SI41/SI42




SI13/SI15



SI14



WATERPROOFING

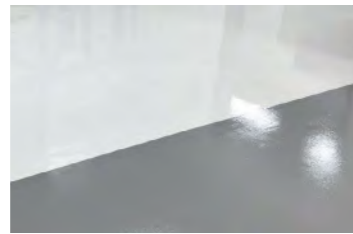

SUBSTITUTE EPOXY



NON-SLIP



HEAT REJECTION



EXTERIORS



ANTIFOULING



TOPCOAT RENEWAL



CERAMIC RENEWAL



NON-SLIP



NON SLIP



INTERIORS



YACHTS



GRANITE




WOOD



STEEL PLATES



ISOLATION

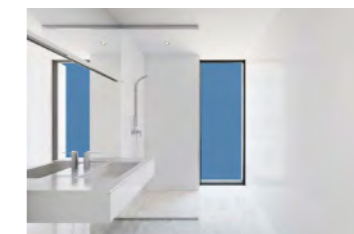

BATHROOMS



SAILING BOATS



WOOD



POOLS



STAIRS



HOUSING



HALLWAYS



SLUICE WALLS



CONCRETE



BASEMENTS



CONCRETE



ISOLATION



INFRASTRUCTURE



SLUICE DOORS

Protect every surface for decades to come

SI11

2-Component (2K)

Topcoat Transparent for glossy surfaces

Article Nr	: SI112000 2 L / 1.900 g
Consumption	: 3 layers +/- 270 g/m ² - 285 ml/m ² 75 micron = 7 m ²
Reachable area	: 2 layers +/- 180 g/m ² - 190 ml/m ² 50 micron = 14 m ²
	: 1 layer +/- 90 g/m ² - 95 ml/m ² 25 micron = 21 m ²
Hardness	: H9
Used on	: Fiberglass, aluminium, steel, stone, marble, : concrete, wood, ceramics, epoxy. etc.
Application area	: Buildings, airports, offshore structures, bridges, tunnels, : swimming pools, stairs, hotels, floors, private housing, etc.




How to use: Page 38-39

SI11 is an incredibly strong 2-component coating system that forms a durable matrix of molecular bonds (transformation into ceramic), resulting in permanent protection of the surface.


Three simple steps: Clean, Dry, and Apply.

- Easily repels water, dirt, dust, and pollutants
- This coating has an outstanding hydrophobic effect
- Restores damaged finishes and reduces cleaning intervals
- Resistant to all types of chemicals and UV radiation
- This coating does not absorb water
- Superior anti-pollution and anti-corrosion properties
- This coating can withstand temperatures of up to 300°C
- Ideal solution for long-lasting rooftop waterproofing.
- Ultimate protection for concrete and stone surfaces
- High-performance protection for steel surfaces, preventing degradation
- Powerful anti-graffiti protection

Expected lifespan of up to 30+ years

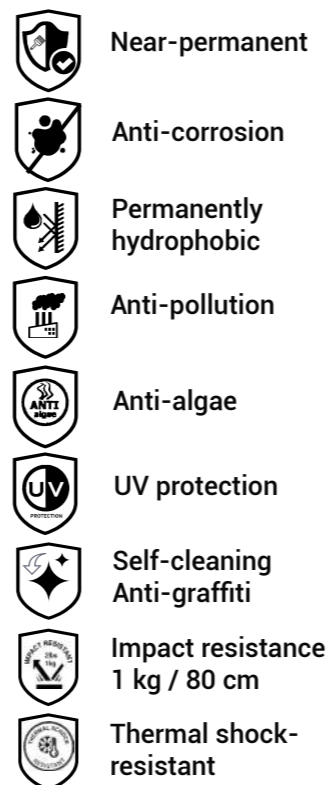

Super Strong - Anti-Corrosion

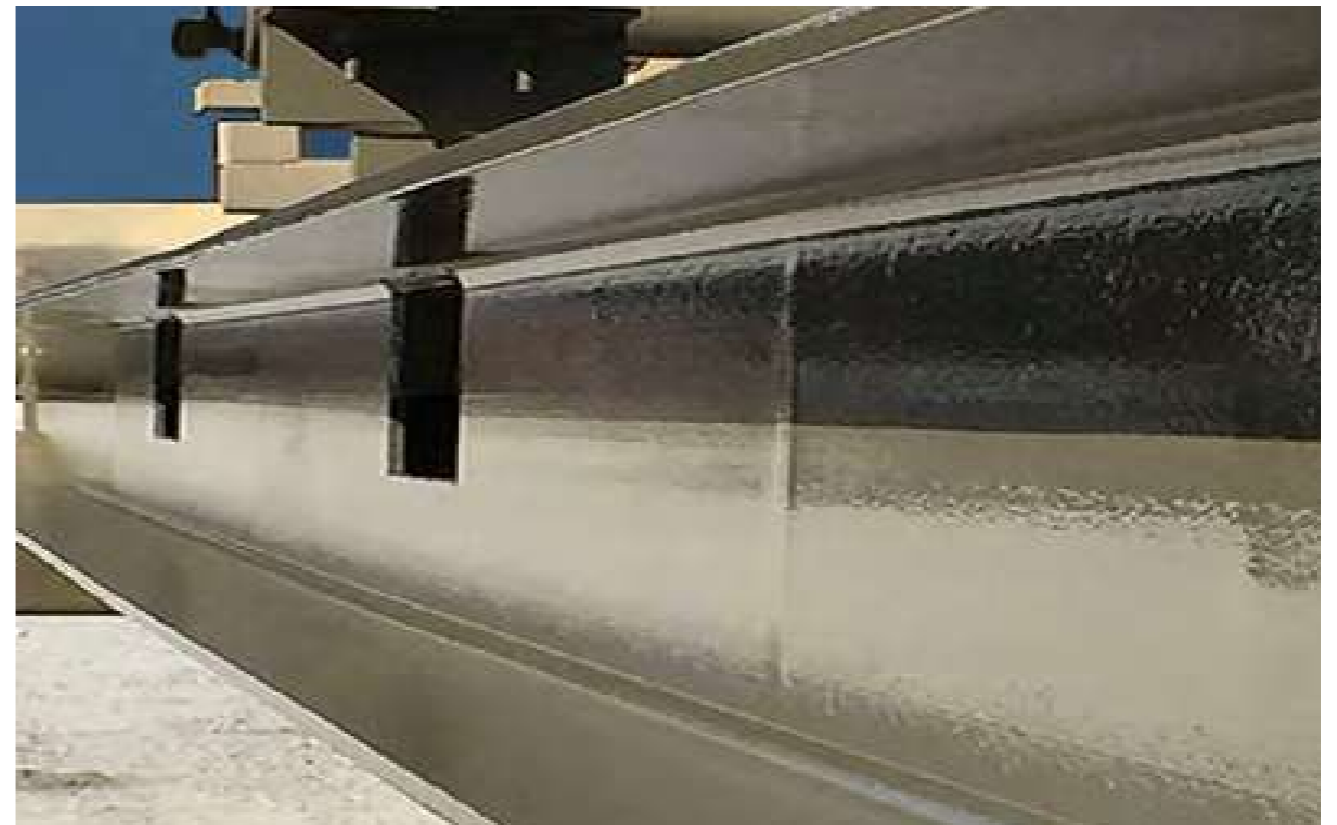

SI12 2-Component (2K)

Topcoat Transparent Matte for matte surfaces



How to use: Page 38-39


Article Nr	: SI122000 2 L / 2.000 g
Consumption	: 3 layers +/- 270 g/m ² - 285 ml/m ² 75 micron = 7 m ²
Reachable area	: 2 layers +/- 180 g/m ² - 190 ml/m ² 50 micron = 14 m ²
	: 1 layer +/- 90 g/m ² - 95 ml/m ² 25 micron = 21 m ²
Hardness	: H9
Used on	: Fiberglass, aluminium, steel, stone, marble, : concrete, wood, ceramics, epoxy. etc.
Application area	: Buildings, airports, offshore structures, bridges, tunnels, : swimming pools, stairs, hotels, floors, private housing, etc.

SI12 is an incredibly strong 2-component coating system that forms a durable matrix of molecular bonds (transformation into ceramic), resulting in permanent protection of the surface.


Three simple steps: Clean, Dry, and Apply.

- Easily repels water, dirt, dust, and pollutants
- This coating has an outstanding hydrophobic effect
- Restores damaged finishes and reduces cleaning intervals
- Resistant to all types of chemicals and UV radiation
- This coating does not absorb water
- Superior anti-pollution and anti-corrosion properties
- This coating can withstand temperatures of up to 300°C
- Ideal solution for long-lasting rooftop waterproofing.
- Ultimate protection for concrete and stone surfaces
- High-performance protection for steel surfaces, preventing degradation
- Powerful anti-graffiti protection

Expected lifespan of up to 30+ years

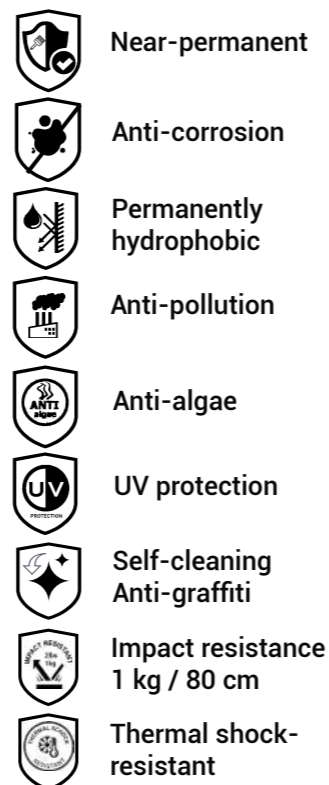

Super Strong - Permanent Hydrophobic

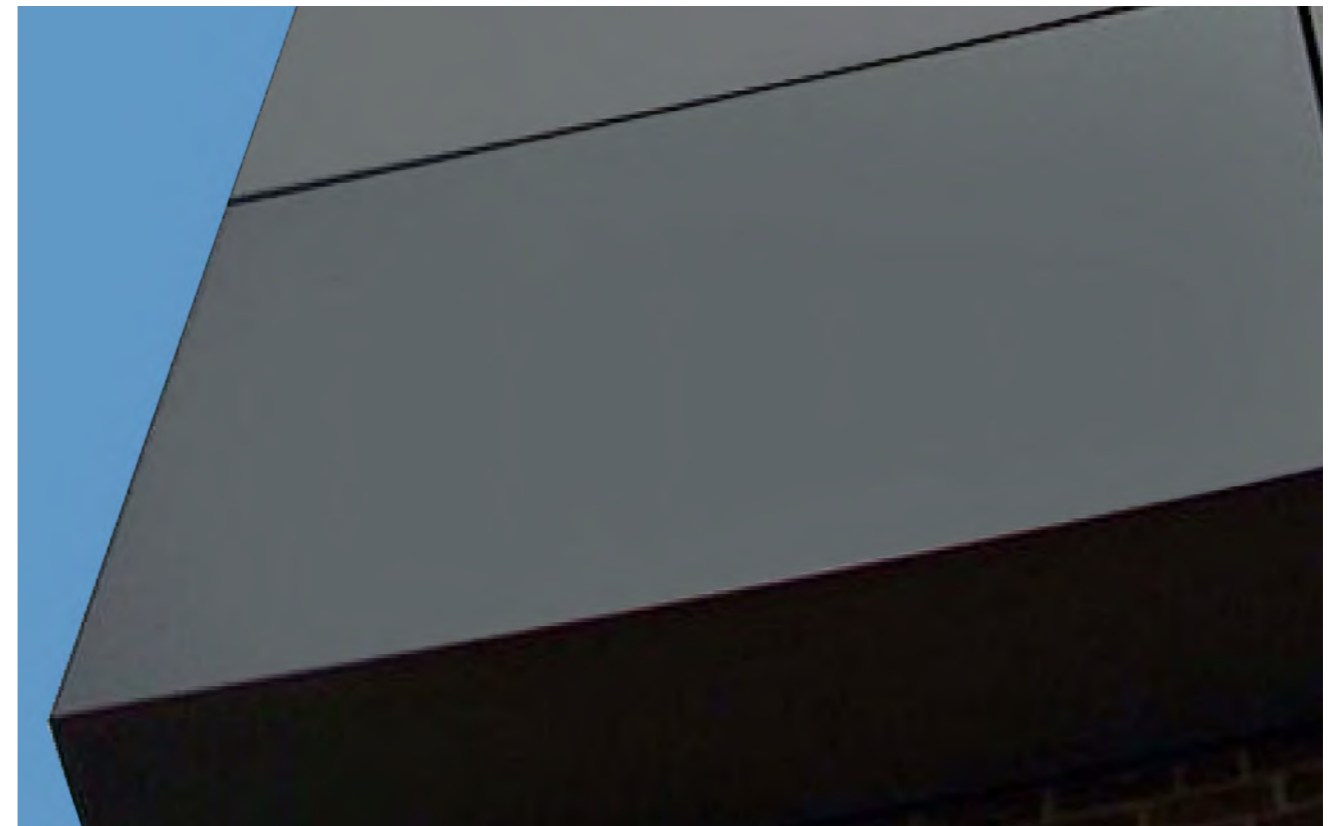

SI31

2-Component (2K)

Topcoat Textured Transparent for semi glossy surfaces



How to use: Page 38-39



Article Nr	: SI312000 2 L / 2.000 g
Consumption	: 3 layers +/- 222 g/m ² - 222 ml/m ² 90 micron = 9 m ²
Reachable area	: 2 layers +/- 111 g/m ² - 111 ml/m ² 60 micron = 18 m ²
	: 1 layer +/- 74 g/m ² - 74 ml/m ² 30 micron = 27 m ²
Hardness	: H9
Used on	: Fiberglass, aluminium, steel, stone, marble, concrete, wood, ceramics, epoxy. etc.
Application area	: Buildings, airports, offshore structures, bridges, tunnels, swimming pools, stairs, hotels, floors, private housing, etc.

SI31 is an incredibly strong 2-component coating loaded with micro sized particles that forms a durable matrix of molecular bonds (transformation into ceramic), resulting in permanent protection of the surface.

Three simple steps: Clean, Dry, and Apply.

- Easily repels water, dirt, dust, and pollutants.
- This coating has an outstanding hydrophobic effect.
- Restores damaged finishes and reduces cleaning intervals.
- Resistant to all kinds of chemicals and UV radiation.
- This coating does not absorb any water
- Superior anti-pollution and anti-corrosion properties.
- This coating can withstand temperatures of 300°C
- Super for stairs and slippery places indoor or outdoor
- Waterproofing from swimmingpools dll.
- Recommended for stairs and slippery places indoor or outdoor

Expected lifespan of up to 30+ years

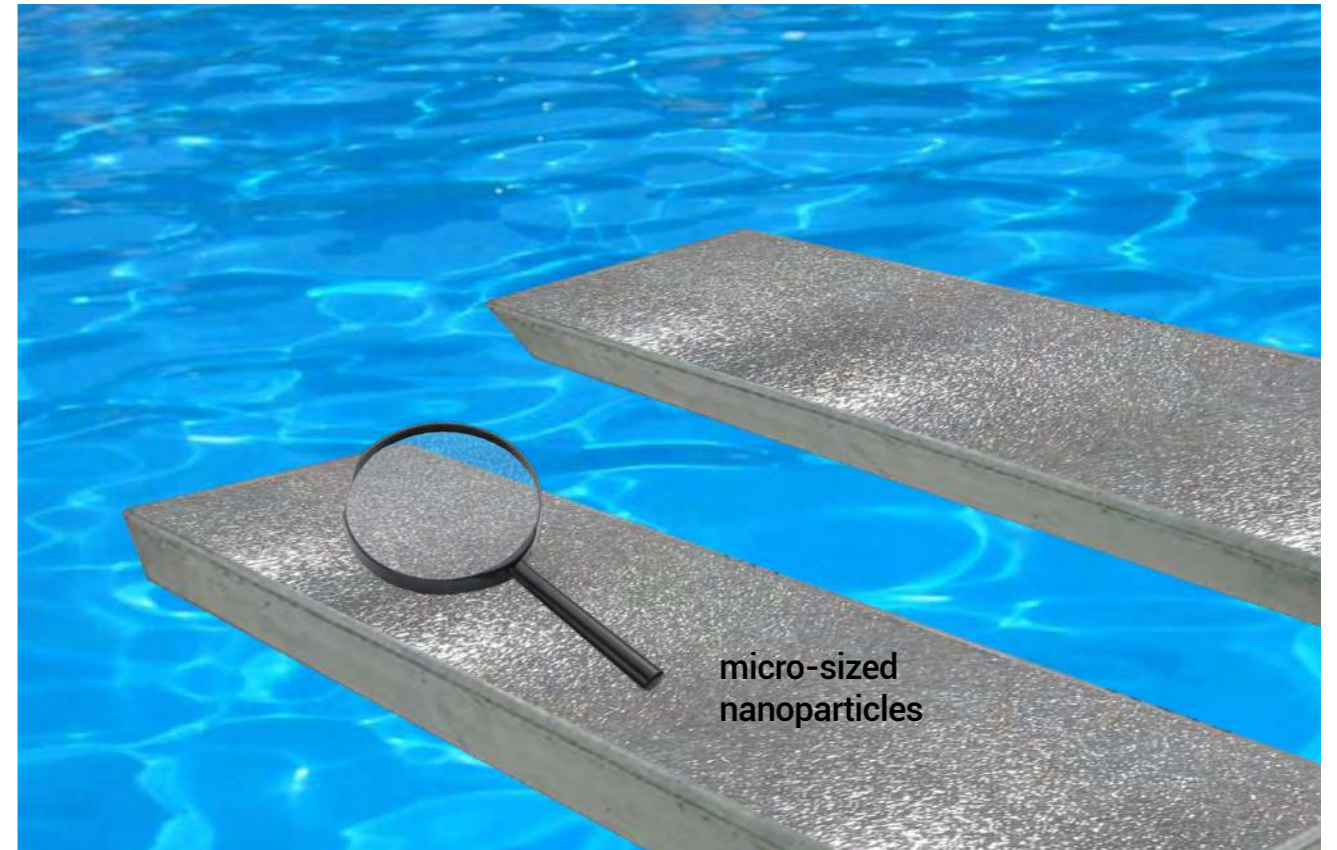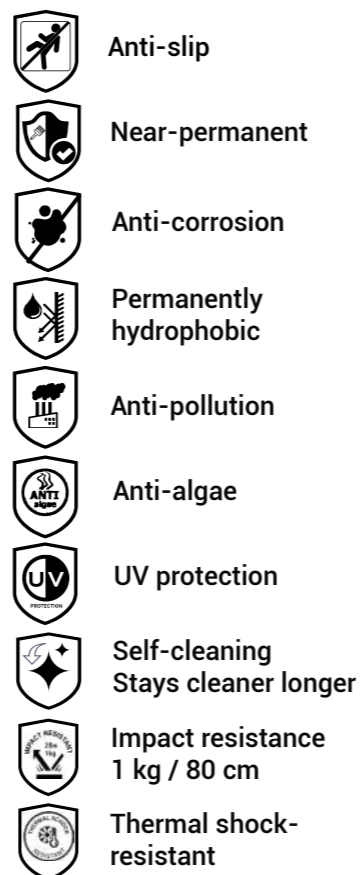

Super Strong - Non-Slip



SI21

2-Component (2K)

Paint Strongest White Gloss for glossy surfaces

Article Nr	: SI210000 2 L / 2.400 g
Consumption	: 3 layers +/- 200 g/m ² - 165 ml/m ² 90 micron = 12 m ²
Reachable area	: 2 layers +/- 130 g/m ² - 110 ml/m ² 60 micron = 16 m ²
	: 1 layer +/- 65 g/m ² - 55 ml/m ² 30 micron = 24 m ²
Hardness	: H8
Used on	: Fiberglass, aluminium, steel, stone, marble, : concrete, wood, ceramics, epoxy. etc.
Application area	: Buildings, airports, offshore structures, bridges, tunnels, : swimming pools, stairs, hotels, floors, private housing, etc.

SI21 is an incredibly strong 2-component paint system that forms a durable matrix of molecular bonds (transformation into ceramic), resulting in permanent protection of the surface.


Three simple steps: Clean, Dry, and Apply.

- Easily repels water, dirt, dust, and pollutants
- This coating has an outstanding hydrophobic effect
- Restores damaged finishes and reduces cleaning intervals
- Resistant to all types of chemicals and UV radiation
- This coating does not absorb water
- Superior anti-pollution and anti-corrosion properties
- This coating can withstand temperatures of up to 300°C
- Ideal solution for long-lasting rooftop waterproofing.
- Ultimate protection for concrete and stone surfaces
- High-performance protection for steel surfaces, preventing degradation
- Powerful anti-graffiti protection


Expected lifespan of up to 30+ years





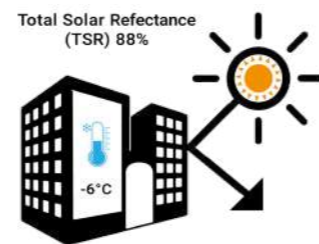



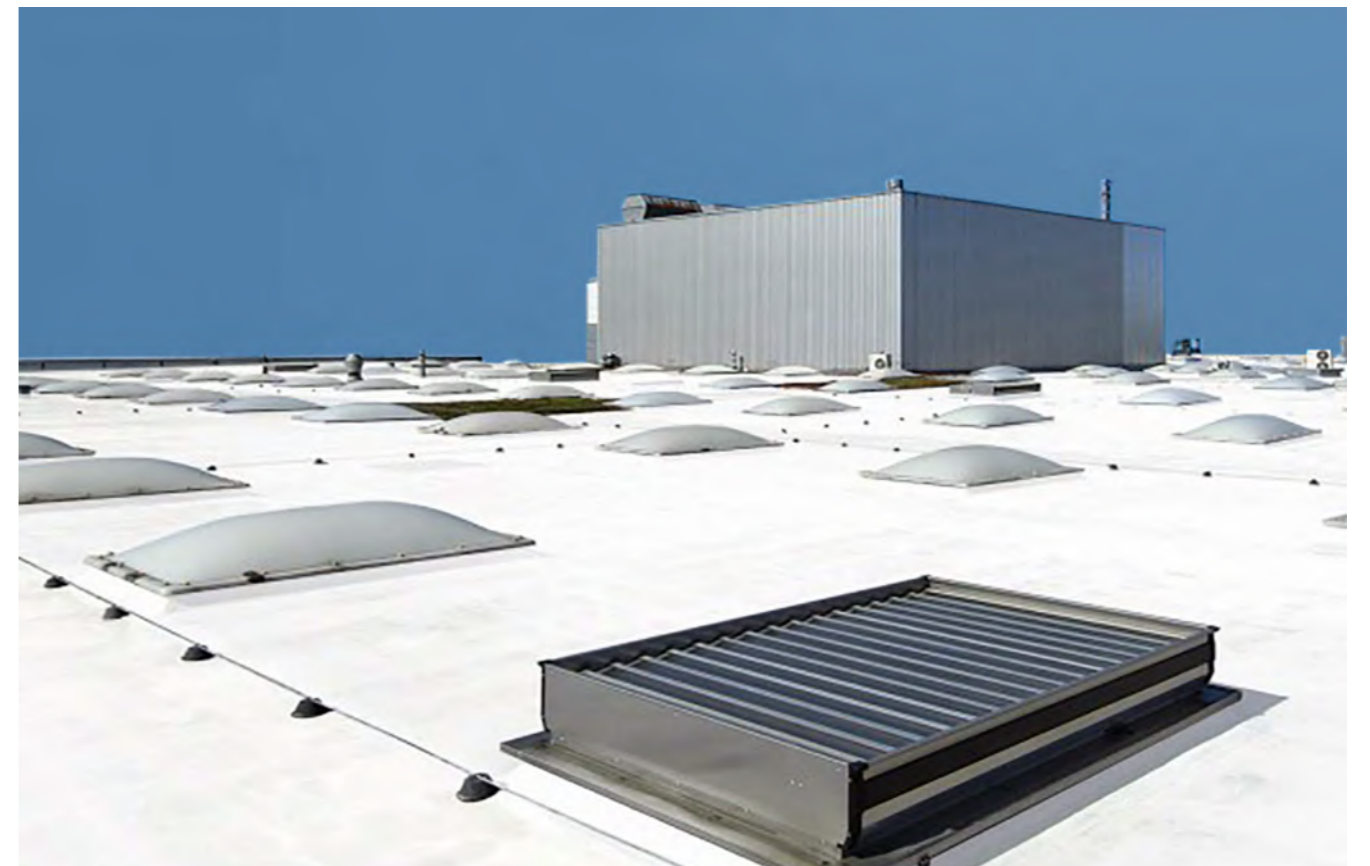


How to use: Page 38-39



Anti-Scratch - Applicable over Epoxy



-  **Near-permanent**
-  **Anti-corrosion**
-  **Permanently hydrophobic**
-  **Anti-pollution**
-  **Anti-algae**
-  **UV protection**
-  **Self-cleaning
Stays cleaner longer**
-  **Impact resistance
1 kg / 80 cm**
-  **Thermal shock-resistant**

SI22

2-Component (2K)

Paint Strongest White Satin for satin surfaces

Article Nr	: SI220000 2 L / 2.500 g
Consumption	: 3 layers +/- 200 g/m ² - 165 ml/m ² 90 micron = 12 m ²
Reachable area	: 2 layers +/- 130 g/m ² - 110 ml/m ² 60 micron = 16 m ²
	: 1 layer +/- 65 g/m ² - 55 ml/m ² 30 micron = 24 m ²
Hardness	: H8
Used on	: Fiberglass, aluminium, steel, stone, marble, : concrete, wood, ceramics, epoxy. etc.
Application area	: Buildings, airports, offshore structures, bridges, tunnels, : swimming pools, stairs, hotels, floors, private housing, etc.

SI22 is an incredibly strong 2-component paint system that forms a durable matrix of molecular bonds (transformation into ceramic), resulting in permanent protection of the surface.


Three simple steps: Clean, Dry, and Apply.

- Easily repels water, dirt, dust, and pollutants
- This coating has an outstanding hydrophobic effect
- Restores damaged finishes and reduces cleaning intervals
- Resistant to all types of chemicals and UV radiation
- This coating does not absorb water
- Superior anti-pollution and anti-corrosion properties
- This coating can withstand temperatures of up to 300°C
- Ideal solution for long-lasting rooftop waterproofing.
- Ultimate protection for concrete and stone surfaces
- High-performance protection for steel surfaces, preventing degradation
- Powerful anti-graffiti protection

Expected lifespan of up to 30+ years





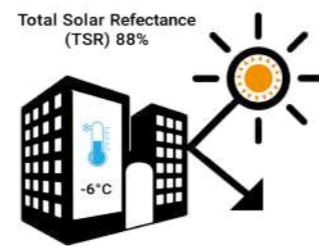






How to use: Page 38-39



Superb adhesion - Waterproof



-  Near-permanent
-  Anti-corrosion
-  Permanently hydrophobic
-  Anti-pollution
-  Anti-algae
-  UV protection
-  Self-cleaning
Stays cleaner longer
-  Impact resistance
1 kg / 80 cm
-  Thermal shock-resistant

SI13

2-Component (2K)

Paint Coolest White for egg-shell surfaces



How to use: Page 38-39

Article Nr : SI132000 2 L / 3.300 g

Consumption : 2 layers +/- 280 g/m² - 170 ml/m² 90 micron = 12 m²

Reachable area : 1 layer +/- 140 g/m² - 85 ml/m² 45 micron = 24 m²

Hardness : H7


Used on : Suitable for application on a wide range of interior and protected exterior surfaces (porous and non-porous), including concrete walls and ceilings, gypsum, and properly prepared wood surfaces. Ideal for covered outdoor areas such as overhang ceilings.

Application area : Buildings, airports, hotels, private housing, etc.

SI13 is a high-performance two-component ceramic coating system designed to deliver a smooth, elegant eggshell finish. It forms a dense matrix of molecular bonds (ceramic transformation), creating a durable, long-lasting protective layer on the surface.

Three simple steps: Clean, Dry, and Apply.


- Repels water, dirt, dust, and airborne pollutants
- Subtle hydrophobic effect for easier maintenance
- Enhances and restores surfaces with a refined eggshell finish
- Reduces cleaning frequency and maintenance costs
- Resistant to UV exposure and common household chemicals
- Provides reliable anti-pollution and anti-corrosion protection

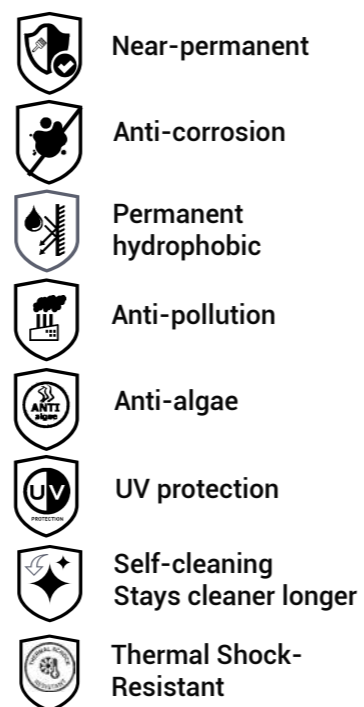

Expected lifespan: up to 25+ years



Eggshell - Easy to Clean

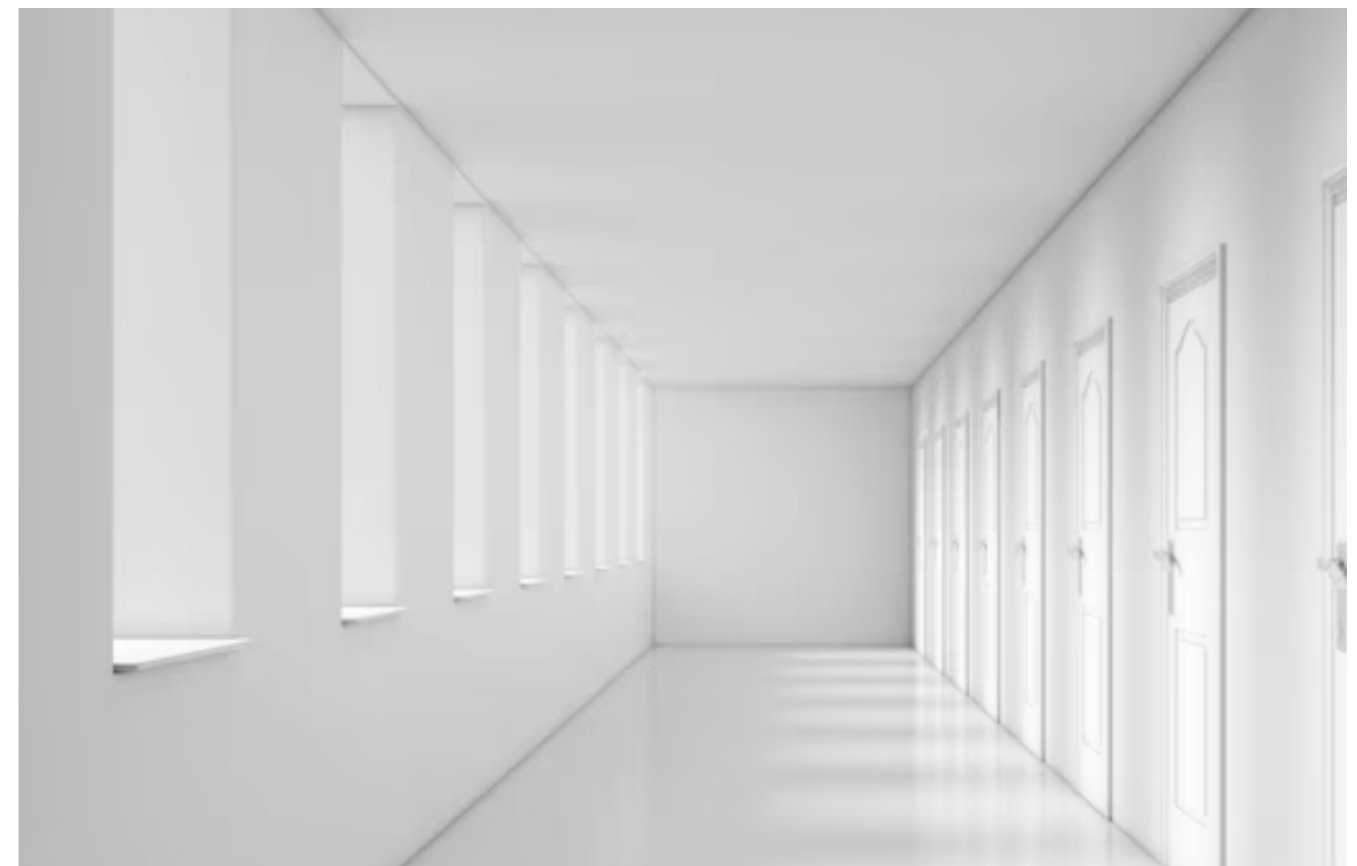

SI15

1-Component (1K)

Paint Coolest White for egg-shell surfaces




How to use: Page 38-39

Article Nr.	: SI152000 2 L / 3.000 g
Consumption	: 2 layers +/- 250 g/m ² - 144 ml/m ² 90 micron = 12 m ²
Reachable area	: 1 layer +/- 125 g/m ² - 72 ml/m ² 45 micron = 24 m ²
Hardness	: H6
Used on	: Suitable for application on a wide range of interior and protected exterior surfaces (porous and non-porous), including concrete walls and ceilings, gypsum, and properly prepared wood surfaces. Ideal for covered outdoor areas such as overhang ceilings.
Application area	: Buildings, airports, hotels, private housing, etc.

SI15 is a high-performance one-component ceramic coating system designed to deliver a smooth, elegant eggshell finish. It forms a dense matrix of molecular bonds (ceramic transformation), creating a durable, long-lasting protective layer on the surface.

Three simple steps: Clean, Dry, and Apply.

- Easily repels water, dirt, dust, and pollutants.
- This coating is permanent hydrophobic
- Restores damaged finishes and reduces cleaning intervals.
- Resistant to all kinds of chemicals and UV radiation.

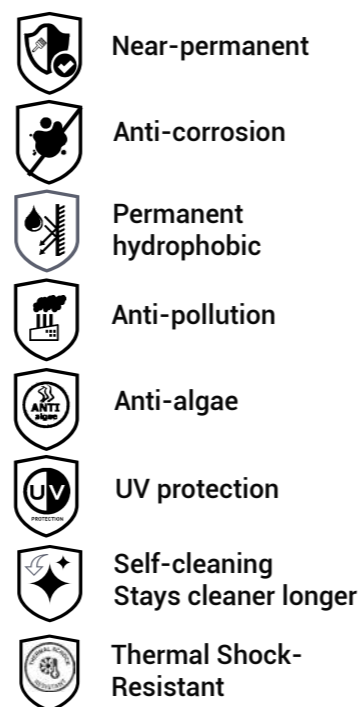

Expected lifespan of up to 20+ years



Water & Dirt Repellent



SI35

1-Component (1K)

Topcoat Transparent for flat matte surfaces



How to use: Page 38-39

Article Nr	: SI352000 2 L / 2.000 g Transparent
Consumption	: 3 layers +/- 222 g/m ² - 222 ml/m ² 90 micron = 9 m ²
Reachable area	: 2 layers +/- 111 g/m ² - 111 ml/m ² 60 micron = 18 m ²
	: 1 layer +/- 74 g/m ² - 74 ml/m ² 30 micron = 27 m ²
Viscosity	: 20
Hardness	: H8
Used on	: stone, concrete
Application area	: Swimming pools, stairs, hotels, floors, private housing, etc.

SI35 is a high-performance one-component coating system that forms a dense matrix of molecular bonds (ceramic transformation), creating a durable, long-lasting protective layer with an extreme matte appearance.

Three simple steps: Clean, Dry, and Apply.

- Repels water, dirt, dust, and environmental pollutants
- Strong hydrophobic effect for enhanced surface protection
- Preserves and revitalizes natural surface appearance
- Reduces cleaning frequency and maintenance costs
- Resistant to UV exposure and a wide range of chemicals
- Superior anti-pollution and anti-corrosion protection
- Heat resistant up to 300°C
- Recommended for stairs and slippery places indoor or outdoor

Expected lifespan: up to 20+ years



Natural - Zero Shine



SI41

2-Component (2K)

Paint Textured White for satin matte surfaces



How to use: Page 38-39

Article Nr.	: SI412000 2 L / 2.400 g
Consumption	: 3 layers +/- 200 g/m ² - 165 ml/m ² 105 micron = 12 m ²
Reachable area	: 2 layers +/- 130 g/m ² - 110 ml/m ² 70 micron = 16 m ²
	: 1 layer +/- 65 g/m ² - 55 ml/m ² 35 micron = 24 m ²
Hardness	: H9
Used on	: Suitable for application on a wide range of interior and protected exterior surfaces (porous and non-porous), including concrete walls and ceilings, gypsum, and properly prepared wood surfaces. Ideal for covered outdoor areas such as overhang ceilings.
Application area	: Buildings, airports, hotels, private housing, etc.

SI41 is an armored super strong textured 2-component thermal insulation paint system which forms a durable matrix of molecular bonds (transformation to ceramic) resulting in permanent protection of the surface.

Three simple steps: Clean, Dry, and Apply.

- Easily repels water, dirt, dust, and pollutants
- Outstanding hydrophobic effect
- Restores damaged finishes and reduces cleaning frequency
- Resistant to a wide range of chemicals and UV radiation
- Superior anti-pollution and anti-corrosion properties
- Withstands temperatures up to 300°C
- Advanced protection for textured wall surfaces

Expected lifespan of up to 20+ years



Easy to apply
Repaintable



Cut maintenance costs



Anti-water spot
Anti-corrosion



Permanently hydrophobic



Self-cleaning stays cleaner longer



Anti-scratch



Protects your investment



Textured - Sprayable



SI42


2-Component (2K)

Paint Textured White for matte surfaces



Article Nr.	: SI422000 2 L / 2.500 g
Consumption	: 3 layers +/- 200 g/m ² - 165 ml/m ² 105 micron = 12 m ²
Reachable area	: 2 layers +/- 130 g/m ² - 110 ml/m ² 70 micron = 16 m ²
	: 1 layer +/- 65 g/m ² - 55 ml/m ² 35 micron = 24 m ²
Hardness	: H9
Used on	: Suitable for application on a wide range of interior and protected exterior surfaces (porous and non-porous), including concrete walls and ceilings, gypsum, and properly prepared wood surfaces. Ideal for covered outdoor areas such as overhang ceilings.
Application area	: Buildings, airports, hotels, private housing, etc.

How to use: Page 38-39

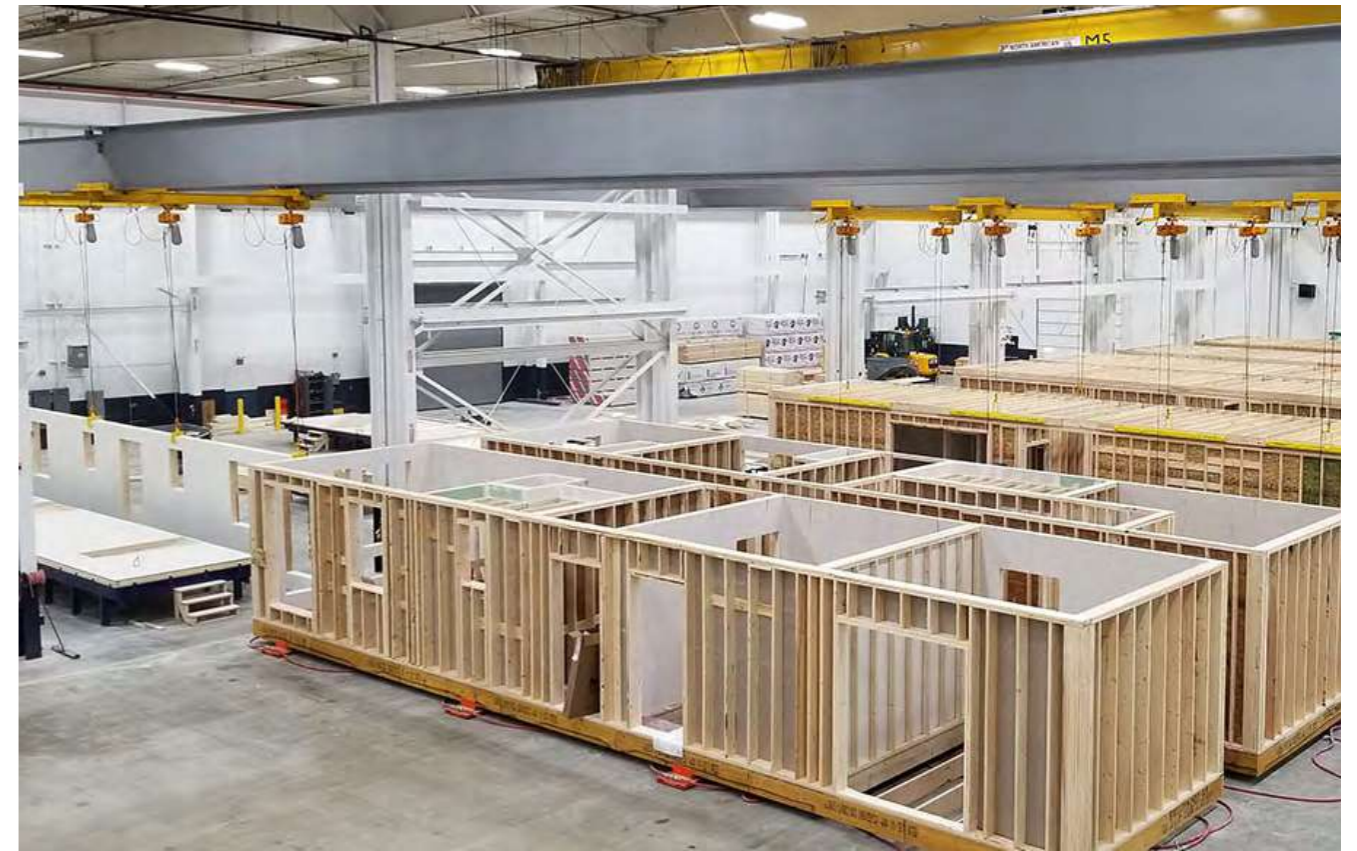

SI42 is an armored super strong textured 2-component thermal insulation paint system which forms a durable matrix of molecular bonds (transformation to ceramic) resulting in permanent protection of the surface.

Three simple steps: Clean, Dry, and Apply.

- Easily repels water, dirt, dust, and pollutants
- Outstanding hydrophobic effect
- Restores damaged finishes and reduces cleaning frequency
- Resistant to a wide range of chemicals and UV radiation
- Superior anti-pollution and anti-corrosion properties
- Withstands temperatures up to 300°C
- Advanced protection for textured wall surfaces



Easy to apply
Repaintable



Cut maintenance costs



Anti-water spot
Anti-corrosion



Permanently hydrophobic



Self-cleaning
stays cleaner longer



Anti-scratch



Protects your investment

Expected lifespan of up to 20+ years

Textured - Easy to Clean



Color mixing has never been so easy!

X- SMART is the modular version of the acclaimed dispenser series, extremely cost-effective and easy to operate, with low maintenance

This color mixer has a robust and tubeless design, built with a patented pump technology (to reduce waste) and identical features, making it a highly advanced dispenser, ideally suited to reduced capacity.



Prisma-RT is a cloud-based innovative mobile color application compatible with the X-SMART dispenser. It brings the best of wireless technology without the associated investment costs in hardware.

Customers do not have to provide computers and other accessories or set up servers, eliminating the need for complicated and time-consuming installation and configuration.

This smart Prisma-RT device helps to fix prices and taxes and can print labels via Wi-Fi.





X-SMART
Stabilizer plates





16 High Grade Coloring chemicals





Titanium White
Masstone 
Tint 
844-0061 4 L





Quinacridone Red
Masstone 
Tint 
844-0451 1 L





Scarlet Red
Masstone 
Tint 
844-0526 1 L





Lead Free Orange
Masstone 
Tint 
844-0982 1 L





Trans Red Oxide
Masstone 
Tint 
844-1054 1 L





Red Oxide
Masstone 
Tint 
844-1063 1 L





Burnt Umber
Masstone 
Tint 
844-1352 1 L





Trans Yellow Oxide
Masstone 
Tint 
844-1852 1 L





Yellow Oxide
Masstone 
Tint 
844-1863 1 L





Lead Free Med Yellow
Masstone 
Tint 
844-2555 1 L





Yellow
Masstone 
Tint 
844-2826 1 L





Organic Yellow
Masstone 
Tint 
844-2852 1 L





PHTHALO Green
Masstone 
Tint 
844-5558 1 L





Quinacridone Violet
Masstone 
Tint 
844-9451 1 L



Lamp Black
Masstone 
Tint 
844-9955 1 L



PHTHALO BLUE
Masstone 
Tint 
844-7262 1 L

Color card

Other colors need minimal 100 kg

Residential

SI13 White Egg-Shell (Flat Finish) 15/25 (20/60°) SI41 Textured White Semi Gloss 41/69 (20/60°)
 SI15 White Egg Shell (Flat Finish) 18/28 (20/60°) SI42 Textured White Matte 11/21 (20/60°)
 SI21 White Gloss 49/77 (20/60°)
 SI22 White Satin 33/59 (20/60°)

Original	RAL 9018	RAL 3015
Cool white	Papyrus white	Light pink
RAL 9001	RAL 9022	RAL 6007
Cream white	Pearl light grey	Pastel blue
RAL 9002	RAL 9023	RAL 4009
Grey white	Pearl dark grey	Pastell violet
RAL 9003	RAL 1000	RAL 6027
Signal white	Green beige	Light green
RAL 9004	RAL 1001	RAL 7000
Signal black	Beige	Squirrel grey
RAL 9005	RAL 1002	RAL 1036
Jet black	Sand yellow	Pearl gold
RAL 9006	RAL 1011	RAL 8029
White aluminium	Brownbeige	Pearl copper
RAL 9007	RAL 1013	RAL 4012
Grey aluminium	Pearl white	Pearl blackberry
RAL 9010	RAL 1014	RAL 6025
Pure white	Ivory	Pearl gentian blue
RAL 9011	RAL 1015	RAL 8036
Graphite black	Light ivory	Pearl opal green
RAL 9016	RAL 9017	RAL 8016
Traffic white	Traffic black	Mahogany braun

Wood

SI11 Transparent Gloss 51/78 (20/60°)
 SI12 Transparent Matte 11/21 (20/60°)

SI11 Transparent

SI11 Light

SI11 Nut

SI11 Colonial

Industrial

SI11 Transparent Gloss 51/78 (20/60°)
 SI21 White Gloss 49/77 (20/60°)
 SI22 White Satin 33/59 (20/60°)

Transparent

Lumious yellow

Traffic red

Jet black

Golden yellow [Cat]

Leaf green [J.D Deere]

Light grey

Dark grey

Silver grey

Signal brown

Pale brown

Marine

SI12 Transparent Matte 11/21 (20/60°)
 SI41 Textured White Semi Gloss 41/69 (20/60°)
 SI42 Textured White Matte 11/21 (20/60°)

Cool white

Pure white

Cream white

Distant blue

Traffic yellow

Silver gray

Light ivory

Pure white

Cream

Beige

Olive yellow

Military

SI31 Textured Transparent Semi Gloss 41/69 (20/60°)
 SI33 Textured Black Semi Gloss 41/69 (20/60°)

Original

Fire red

Burgundy

Platinum

Jet Black

Turquoise bleu

Light green

Violet blue

Light blue

Ultramarine blue

Sapphire blue

Signal blue

Light stone

Bronze green

Brunswick green

Dark sea grey

[RAF] Blue grey

Desert sand

Camo beige

Dark grey camo

Dark brown camo

Olive drap

Very dark drap

Antifouling

SI14 Color 3141 (20/60°)

Transparent

Jet Black

Signal Red

Ultra marine blue

Signal Grey

SIX1

2-Component (2K)

Primer Epoxy Polyamide

heavy duty - anti-corrosion

Article Nr. : SIX11250-WH/GR 1.25 L / 1.45 kg SIX15000=WH-GR 5 L / 5.8 kg
Consumption : 2 layers +/- 240 g/m² - 250 ml/m² 80 micron = 5 m²
Reachable area : 1 layer +/- 120 g/m² - 125 ml/m² 40 micron = 10 m²
Hardness : H5
Colors : White, Grey or RAL (RAL Minimum Order 250 pcs 5 L)
Used on : Concrete, Steel, Aluminium, Fiberglass and other organic surfaces

Application area : Buildings, marine, airports, offshore structures, bridges

SIX1 is a solvent based epoxy polyamide primer. This primer is used for corrosion protection on concrete, stainless, galvanized, carbon and alloy steel, aluminum in corrosive conditions and has excellent adhesion to all organic substrates and to all of our ceramic topcoats. The primer can be applied at a relative humidity of 40-80% and can be painted over within 8 hours 30°C, 1 hours 60°.



Fast Repaintable



Excellent adhesion



Heavy Duty Primer - Smooth Surfacer

SIX2

2-Component (2K)

Primer Surfacer Acrylic Alkyd

smooth - surface modifier

Article Nr. : SIX21250-WH/GR 1.25 L / 1.45 kg SIX25000-WH/GR 5 L / 5.8 kg
Consumption : 2 layers +/- 200 g/m² - 210 ml/m² 60 micron = 6 m²
Reachable area : 1 layer +/- 100 g/m² - 105 ml/m² 30 micron = 12 m²
Hardness : H3
Colors : White, Grey
Used on : Steel, aluminium, wood, fiberglass, and old paint systems.
Application area : Buildings, hotels, private housing, etc.

SIX2 High-quality 2K surfacer (two-component basecoat) for auto-refinish, marine, and industrial coating applications where a smooth surface is required. The primer has excellent adhesion to all organic substrates and to all of our ceramic topcoats. The primer can be applied at a relative humidity of 30-80% and can be painted over within 4 hours 30°C, 1 hours 60°C.



Fast Repaintable



Excellent adhesion



SIX3

2-Component (2K)

Primer PU Wood Filler

surface modifier - absorption reducer

- Article Nr.** : SIX31500 1.5 L / 1.4 kg
Consumption : 2 layers +/- 175 g/m² - 185ml/m² 60 micron = 8 m²
Reachable area : 1 layer +/- 115 g/m² - 95ml/m² 30 micron = 12 m²
Hardness : H4
Colors : Transparent
Used on : Wood, Natural Stone, and other organic surfaces
Application area : Buildings, marine, hotels, private housing, etc.

SIX3 is a solvent borne transparent wood filler. This primer is used as surface modification for, wood or natural stone to reduce capillary absorption and has an excellent adhesion to all organic substrates and towards one of our ceramic top coats. The primer can be applied at a relative humidity of 40-80%.



Fast Repaintable



Excellent adhesion



Wood or Natural Stone - Filler

SIX4

1-Component (1K)

Primer Acrylic Waterbased

all surfaces modifier

- Article Nr.** : SIX41000-WH/GR 1L / 1.2kg SIX44000-WH/GR 4L / 4.8kg
Consumption : 2 layers +/- 240 g/m² - 200 ml/m² 60 micron = 5 m²
Reachable area : 1 layer +/- 120 g/m² - 100 ml/m² 30 micron = 10 m²
Hardness : H3
Colors : White, Grey or RAL (RAL Minimum Order 250 pcs 4 L)
Used on : Concrete, wood, drywalls and old waterbased paints
Application area : Buildings, walls and ceilings indoor or outdoor

SIX4 Acrylic Water-Based Primer is a premium, all-purpose primer-sealer with excellent adhesion, stain-blocking, and hiding power. Ideal for both interior and exterior surfaces, it bonds to glossy surfaces without sanding, effectively blocks stains, and provides a smooth foundation for any solvent-based or water-based topcoat.



Fast Repaintable



Excellent adhesion



VOC Free



SIX5 2-Component (2K)

Putty Polyester
ultra smooth - sandable

- Article Nr.** : SIX51000 1 kg
- Colors** : Grey
- Used on** : Metal, wood, fiberglass, concrete, plastics
- Application area** : Buildings, marine, airports, offshore structures, bridges private housing, etc.

SIX5 is a High quality 2 (two) component Epoxy base putty for auto-refinish, marine and industrial coating applications.



- Fast Repaintable**
- Excellent adhesion**

SOLV Thinner solvent

for all types of our ceramic paint & coating

- Article Nr.** : SOLV0400 400 ml / 345 g SOLV2000 2 L / 1.760 g SOLV5000 5 L / 4.400bg

All our paints and coatings are ready to use, for certain spray applications, especially dark colors who require more than average color pigments, it may be necessary to use a little thinner solvent to achieve optimum flowability.



RETA/ACCL Retarder Accelerator


slow down flash time or speed up curing

- Article Nr.** : RETA0400 400 ml / 345 g ACCL0200 200 ml / 180 g

If your application requires a longer flash time (for example, in hot temperatures) to build up the layer with a second or third coat, you can add RETA Retarder. If you want to accelerate the curing process of UVA Topcoat, you can add 0.2%–0.4% ACCL Accelerator, with a maximum of <0.4%. This additive can reduce drying time by 30–70% compared to a non-catalyzed system, and full hardness can be achieved 1.5–2 times faster.



Scan QR Code for TDS and SDS

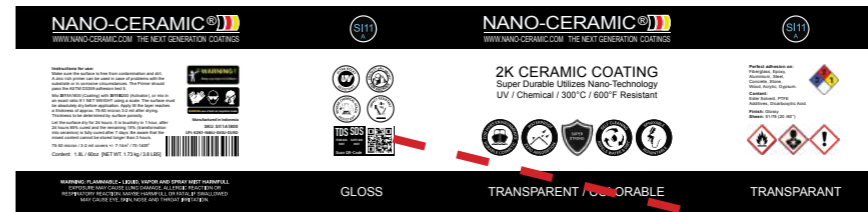

All our products are produced according to EU/ECHA USA/OSHA/EPA CANADA/WHIMS regulations



Test, Touch and Feel Test Results Video Application



DEMOSKIT 16 different coating and paints



E-Warranty

The quality and reliability of NANO-CERAMIC are guaranteed for 12 years when applied at the specified maximum thickness, as indicated on the product page. This limited product warranty applies to the original purchaser for installations in new building applications, provided the product is professionally installed under the supervision of an approved installer. The warranty applies only to newly constructed concrete wall applications and covers defects such as discoloration, peeling, cracking, or delamination. No warranty is provided for damage caused by surface or concrete cracks. Any claims resulting from the use of cleaning chemicals—other than SHRE Pure Shine Shampoo—will be rejected. This warranty is valid only if registered by an approved installer through the Dealership Electronic Warranty Registration form on our website.

How to use our Permanent Coating System:

These products can be stored for up to 24 months (in a dry, temperature-stable dark environment)

Processing Temperature:

Ambient temperature: 5-30°C
Avoid direct sunlight, Rain and /or high humidity.

IMPORTANT:

Before you use a NANO-CERAMIC product, please make sure you wear suitable protection gear. We always recommend using a paint suit, respirator mask and latex or nitrile gloves.

Outfit/Applicators:



Fresh Air Respirator

Paint Suit

Nitrile gloves

HVLP Paint Sprayer
1.3mm / 1.5mm / 1.8mm nozzle

Paint Roller
(Microfiber)

Paint Brush
(acrylic)

Application Information

SI11, SI12, SI13, SI15, SI35, SI21, SI22, SI31, SI41, and SI42 coatings can be applied directly or indirectly to porous and non-porous surfaces such as concrete, steel, wood, acrylic, gypsum, and painted or unpainted surfaces, for both indoor and outdoor use. The coating provides effective protection against erosion and corrosion while keeping surfaces cleaner for longer, making cleaning faster, easier, and more cost-effective without the need for special cleaning agents.

Surface Preparation

Ensure the surface is clean, dry, and free from dust, oil, grease, and other contaminants. In case of substrate-related issues, apply a suitable primer (SIX1, SIX2, SIX3, SIX4) prior to coating. The surface must be completely dry before application and must remain dry for at least 6 hours after application.

2K Coating System (A + B)

Mix Component B into Component A by pouring the full contents of B into A or by using a ratio of 9:1 (A) by net weight, then mix until homogeneous. Applicable for: SI11 / SI12 / SI31 / SI21 / SI22 / SI41 / SI42 / SI13

Application

Pour the mixed material into a professional spray gun and apply in thin layers until the desired thickness is achieved. Alternative methods such as roller or brush may also be used depending on the surface and application conditions.

Curing

Touch dry approximately 1 hour. 85% cured approximately 4 hours. Full curing approximately 7 days. Initial drying before use minimum 24 hours. Pot life maximum approximately 3 hours after mixing.

Maintenance

The surface can be cleaned using a high-pressure washer (approximately 80 bar) with biodegradable Reactivation Shampoo SHRE.

Mixing Instructions using additives

Mix ratio

9:1 by net weight (Component A : B)

For full kit application, pour all of Component B into Component A and mix thoroughly.

For partial quantities or when adding color dye, always measure using a calibrated scale.

Do not mix by volume.

Adding Color dye

Add color dye (max. 8%) to Component A and mix thoroughly before adding Component B.

Component B must be calculated based on the net weight of Component A prior to adding any color dye.

Do NOT increase Component B to compensate for added dye.

Mixing ⚠

Mix thoroughly for 2 minutes using a mixing stick.

Scrape the sides and bottom during mixing.

Adding Solvent

If necessary, a maximum of 5% SOLV high-purity, compatible solvent may be added to adjust application viscosity.

Excess addition may reduce film build, delay curing, and negatively affect final coating performance.

Adding Retarder

The use of retarder solvent is not recommended.

If required under high-temperature conditions, a maximum of 2–3% approved retarder may be used.

Excess addition may delay curing and reduce final coating performance.

Adding Accelerator

The use of accelerators is not recommended.

Addition may significantly reduce pot life, negatively affect application properties, and compromise final coating performance.

If the use of accelerator is unavoidable, use ACCL Ceramic Accelerator at a maximum of:

0.5% of total mixture (A+B)

For UVA Topcoat: max. 0.25%

Add immediately before application and mix thoroughly.

Use only in small batches and apply without delay.

Test a small area ⚠

Always test a small area to confirm that the product's color, texture, hardness, and adhesion meet the desired finish.



NANO-CERAMIC®

WWW.NANO-CERAMIC.COM THE NEXT GENERATION COATINGS

There is no better option than
NANO-CERAMIC!



The Leader in Durability

Did you know?

*Our coatings are made from
pure silica sand, which is
the most common element
on earth!*

Dealer